



## OPERATIONS MANUAL - DJAP-880BT


### Professional ABS Molded Loudspeaker - 8"

#### Introduction:

Congratulations on your purchase of this amplified loudspeaker enclosure, this amplified loudspeaker enclosure includes the very latest technology in lightweight ABS design. The trapezoidal design was used in order to achieve a more precise and accurate sound furthermore it increases the sound definition on vocal frequencies. This state of the art amplified loudspeaker enclosure will provide years of enjoyment.

#### Features:

- Wireless Music Stream
- Steel basket woofer
- High temperature voice coil
- High wattage class A/B amplifier
- Custom (Ap) stamped metal grill
- Stand mounting socket
- Auxiliary RCA Line Output
- Rubber Feet
- USB host/SD card port
- Microphone input
- Built in FM tuner

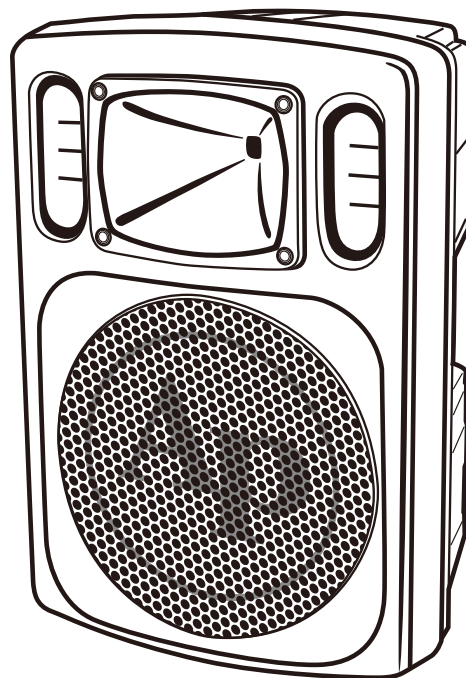


#### Cautions:

1. All operating instructions should be read before using this equipment.
2. To reduce the risk of electric shock, do not open the unit. There are NO REPLACEABLE PARTS INSIDE. Please refer servicing to a qualified service technician.
3. Do not expose this unit to direct sunlight or to a heat source such as a radiator or stove.
4. This unit should be cleaned only with a damp cloth. Avoid solvents or other cleaning detergents.
5. When moving this equipment, it should be placed in its original carton and packaging. This will reduce the risk of damage during transit.
6. DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.
7. DO NOT USE ANY SPRAY CLEANER OR LUBRICANT ON ANY CONTROLS OR SWITCHES.
8. Make sure ALL of your VOLUME, LEVEL and GAIN controls are in the low position, the unit must be completely in off position before making a connection to your amplified loudspeaker enclosure.

**Disregarding any of the above will void your warranty!!!!**

## Functions:

1. **USB Port**
2. **SD Port**
3. **TREBLE controller of music effect**
4. **ECHO effect controller**
5. **MIC Volume controller**
6. **MIC1/LINE1 Signal (Imbalanced signal) Input Channel**
7. **MIC2/LINE2 Signal (Imbalanced signal) Input Channel**
8. **Function Buttons:** MIC1/LINE1 and MIC2/LINE2 Signal Channel's Gain switchover
9. **LCD Display:** Displays the current status and English file names.
10. **IR Receiving Indicator/ Play Indicator.**
11. **BASS controller of music effect**
12. **Volume:** Controlling the output power of speaker box.
13. **LINE IN:** (Imbalanced signal) RCA channel line input
14. **Power Indicator**
15. **LINE OUT:** (Imbalanced signal) RCA channel line output, and used for recording.
16. **SPEAKER OUT:** Speak on output for connecting a passive speaker enclosure.(Note: impedance should not be below 8 ohms)
17. **Power Supply Switch.**
18. **Power Supply Input Connector:** Use with power cord(For the power with voltage switch,before using it,please make sure that correspondent (19) arrow voltage is in accordance with the network voltage).
19. **Voltage Selector:** Changes AC Power between 115V and 230V.

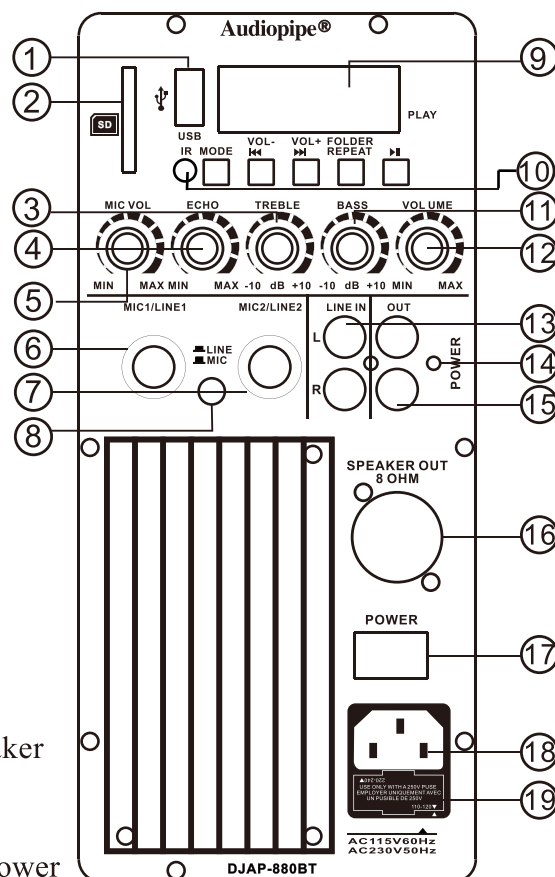

**MODE Button (MODE):** Press to alternate among radio, USB, SD and Bluetooth mode and Line Input Conversion.

**Down Option Button (◀◀ /VOL-):** To select a next song or a channel; To turn down MP3 volume.

**Up Option Button (▶▶ /VOL+):** To select a previous song or a channel; To turn up MP3 volume.

**FOLDER/REPEAT Button:** Pressing this button for selection from single repeat, repeat all and random play, and Conversion for FOLDER internal recycle player.

**Play/Pause Function Buttons (▶▶ /SCAN):**

- a. A short press for Play/Pause;
- b. While in FM mode, pressing to activate the automatic scan, the strongest stations will be memorized.

## Connections:

Make sure all of your equipment is completely OFF and lower ALL VOLUME, LEVEL & GAIN controls before connecting the speaker.

For this unit you can connect a mixer or microphone directly into your speaker, To connect a microphone use an XLR or 1/4" jack connector to connect to the **MIC1(6)** and **MIC2(7)** input.

1. To connect a CD player, turntable or mixer use an XLR or RCA connector to connect to the **LINE IN(13)** input, if connecting a powered mixer use the mixers line level signals only.
2. You can LINK additional speakers using the **LINE OUT(15)** connection. The amplifier on your speaker will only power this speaker. If you LINK to additional speakers those speakers must be self amplified.
3. Turn on your mixer/microphones or other signal source, then turn on your unit, the **Power Indicator(14)** will be lit. Now you can adjust your volume controls to a reasonable level.