


CA DOOR KHG-0810(V)

Home » Products » CA doors and windows » KHG-0810(V)




Door leaf constructed of a core of 100mm insulation material, covered on both sides with polyester and finished all round with anodized aluminium profiles, thermal bridge-free. Equipped with an aluminium drop/lift rail system.

- 100% gas-tight due to inflatable sealing.
- Even in case of any irregularities in floor and wall after years still 100% tight.
- No vaseline or sealant required for sealing.
- It takes only seconds to open and reseal Salco CA doors.
- Seamless door leaf.
- Door leaf and frame fully thermal bridge-free.
- Light in weight due to the use of high quality polyester (available in various colours).
- Deliverable as self-assembly pack.
- Various designs: horizontal, vertical and hinged doors.
- 35 years worldwide experience.

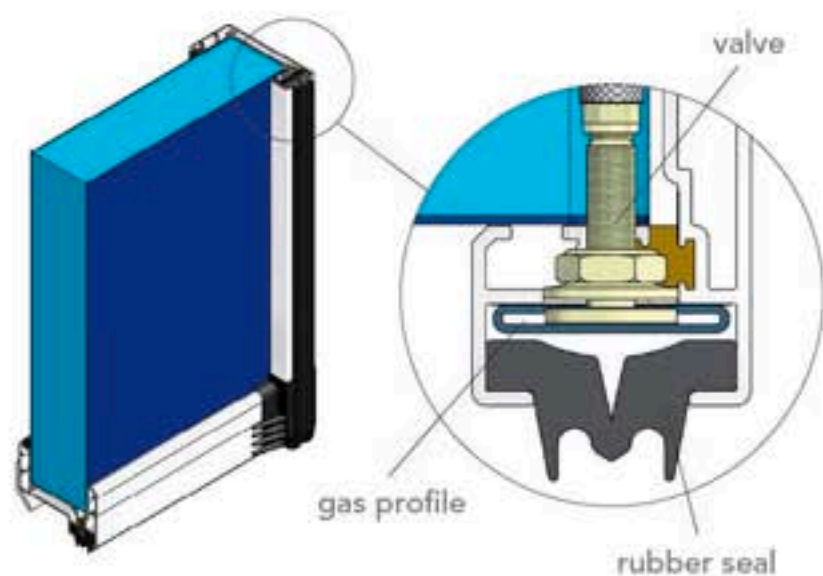

More pictures:

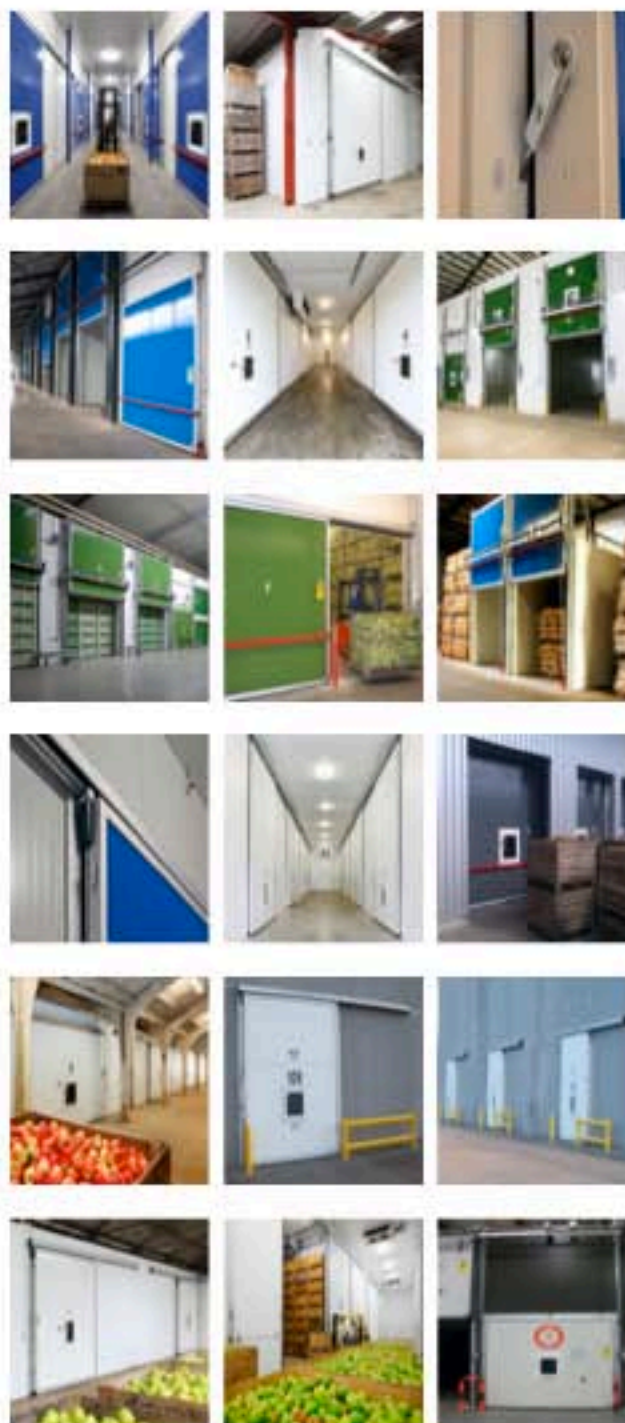

Available downloads

[Installation drawings »](#)

[Product page »](#)

[Technical specifications »](#)

[Overview CA doors and windows ▾](#)

Related products

[KHG-0810\(V\) KIT ▾](#)

Technical specifications CA door KHG-0810(V)

Construction : door leaf constructed of a core of insulation material, covered on both sides with 1,5mm impact-resistant glass-fibre reinforced foodsafe polyester.

Thickness door leaf : 100mm

R-value : approx. 3,7 (m².K/W).

Framing : anodized aluminium profiles, thermal bridge-free.

Colour of door leaf : standard colours RAL 6010 (green), RAL 9016 (white) or RAL 5005 (blue). Door leaf finished in colour to be specified at additional price.

Sealing : 100% gas-tight by means of inflatable profiles.

Door frame : anodized aluminium profiles with a complete thermal bridge-free fit to the wall.

Rail system : anodized aluminium drop/lift rail system type SRA with dust cap (horizontal), galvanized guiding system (vertical or partly vertical (tilt system)). Rail system in stainless steel at additional price.

Operation : manually operated (horizontal), chain operated (vertical). Electrical operation at additional price. Electrical operation is standard on doors with tilt system.

Openers : inside and outside opener included (horizontal).

Locks : not included. Available at additional price.

Additional options : bumper, threshold, finish of the clear opening, CA window, rain cap and more. Also available in kit form (see separate documentation).