

# COMMERCIAL SLIDING DOOR BSD-0804

[Home](#) » [Products](#) » [Refrigeration and freezer doors](#) » BSD-0804



Door leaf constructed of a core of 40mm insulation material, covered on both sides with polyester and finished all round with aluminium profiles, thermal bridge-free. Equipped with an aluminium drop/lift rail system.


- Foodsafe polyester covering. Choice of three standard colours.
- Easy to operate. Due to the polyester which makes the doors light.
- Double-door version available. If electrically operated, very high opening speeds are achievable.
- Slight damage to the polyester top can be easily touched-up.
- Glazing available at additional price.
- Special stainless steel version possible.

[View illustrations:](#)



Section

More pictures:

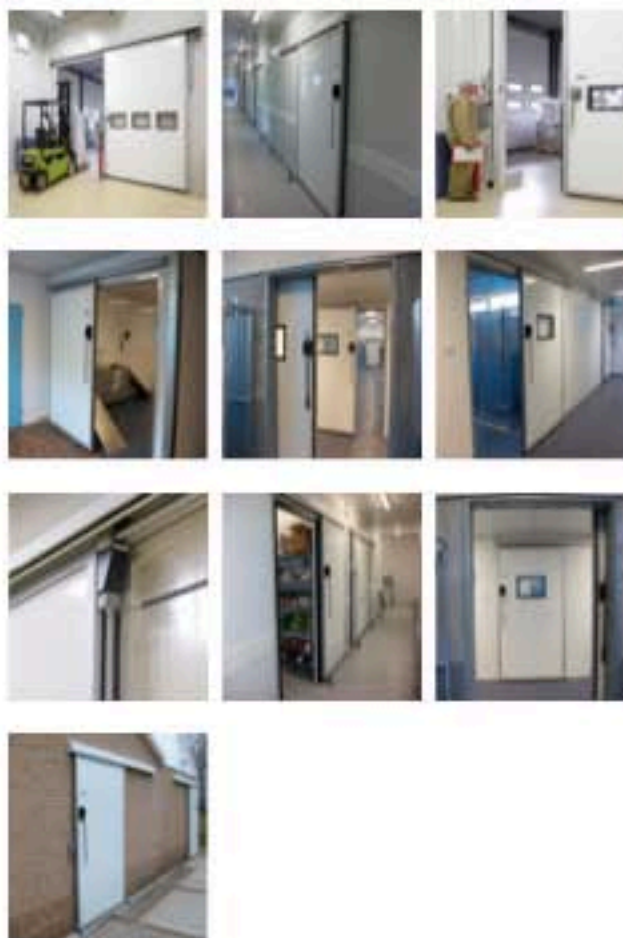

[Available downloads](#)

[Installation drawings »](#)

[Product page »](#)

[Technical specifications »](#)

[Overview Refrigeration and freezer doors](#) ▾

[Contact form](#) ▾



Technical specifications Commercial sliding door BSD-0804

<b>Construction</b>	: door leaf constructed of a core of insulation material, covered on both sides with 1,5mm impact-resistant glass-fibre reinforced foodsafe polyester.
<b>Thickness door leaf</b>	: 40mm.
<b>R-value</b>	: approx. 1,48 (m <sup>2</sup> .K/W).
<b>Framing</b>	: anodized aluminium profiles, thermal bridge-free.
<b>Colour of door leaf</b>	: standard colours RAL 6010 (green), RAL 9016 (white) or RAL 5005 (blue).
<b>Glazing</b>	: not included, door leaf completely closed. Available at additional price.
<b>Sealing</b>	: all round by means of rubber profiles.
<b>Door frame</b>	: anodized aluminium profiles with a complete thermal bridge-free fit to the wall.
<b>Rail system</b>	: anodized aluminium drop/lift rail system type SRA with dust cap.
<b>Operation</b>	: manually operated. Electrical operation at additional price.
<b>Openers</b>	: inside/outside opener included.
<b>Locks</b>	: not included. Available at additional price.
<b>Additional options</b>	: double-door version, special stainless steel version (see stainless steel documentation), finish of the clear opening and more.