

Power Supply: PS-05

Description:

The PS-05 is used as a power supply for the Sure Grip Controls' proportional joysticks. The PS-05 can also supply regulated 5 VDC to Sure Grip's variable voltage proportional modules (PC-V2).

The PS-05 is installed as an in-line module on a Sure Grip joystick wiring harness.

The hardware is designed to withstand potentially damaging electrical surges (common on mobile hydraulic machinery)

Features

Power supply for Sure Grip Joysticks and Sure Grip PC-V2 modules.

Installed in-line with the handle wire harness.


No extra wiring.

Electrical protection built in.

Operates on 12 or 24 VDC machines.

Specifications

Operating voltage	10-28 VDC
Wire terminals	solder post
Regulated output	4.9-5.1VDC

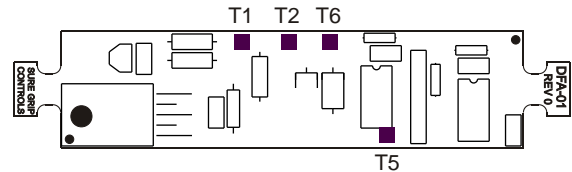

PIN	SIGNAL	STANDARD WIRE	
	V in	+12 to +24 VDC	RED
T2	GND	12/24V ground	BLK/WH
T5	V out	+5 VDC Output	PINK
T6	GND	5V ground	BLK/WH

PS-05 adapter card and housing