



# LP-SLL-D



## Key Features:

- A** High Luminous efficacy, up to 150lm/W
- B** Low profile and compact design
- C** Heavy duty anodized die-casting aluminum, anti-corrosive, long lasting and durable
- D** Shock and vibration-resistant




## Parameter


Model	C1D1	C1D2	Voltage	Lens	Ambient temperature	CCT	Fixture Lumens	Watt	LPW	Optical Pattern
LP-SLL-D-45		●	100-240/277V	Tempered glass	-40°C -+55°C	5000k	6750	45	150	110°
LP-SLL-D-65		●	100-240/277V	Tempered glass	-40°C -+55°C	5000k	9750	65	150	110°

## Mounting options


### • Pendant




### • Ceiling mount




### • Brackets




### • Stanchion 25°

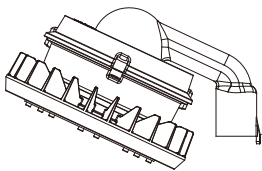


### • Stanchion 90°

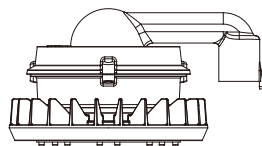


### • Wall 25°

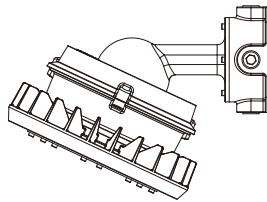

### • Wall 90°

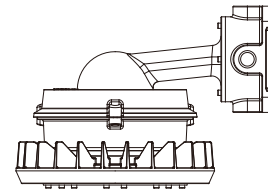

## Photometrics

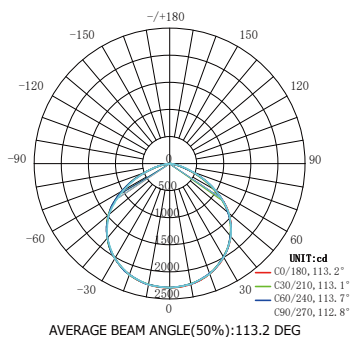

## Application

