

PROFLEX 5



24V DC 4.8w p/m IP20 79 Lm/W 60 LED/m ≥ 80 CRI/Ra


Quick facts

- Professional series LED strip with thick Rolled copper foil FPCB & on board current control
- IP20 Ingress protection
- CCT: 2700k-6000k
- 60 LEDs/M, 4.8W/M
- Supplied on 5m Reel or custom made to size
- Must be used with a 24V DC constant voltage LED driver
- 10mm width, cutting increments 100mm
- Continuous lighting with 16mm LED pitch
- Up to 79 Lumens per watt
- Maximum connection length 20m
- Life 30,000hours
- 3 Years Warranty

Technical Data:

CODE	WATTS	CCT(K)	LUMENS	LM/W	VOLTS	ANGLE	PITCH	DIM's
PF-5-30k-20	4.8	3000K	365	76.0	21-27	120	16.6	1000*10*1.7
PF-5-40k-20	4.8	4000K	380	79.1	21-27	120	16.6	1000*10*1.7

Also available in 2700k, and 6000k special order

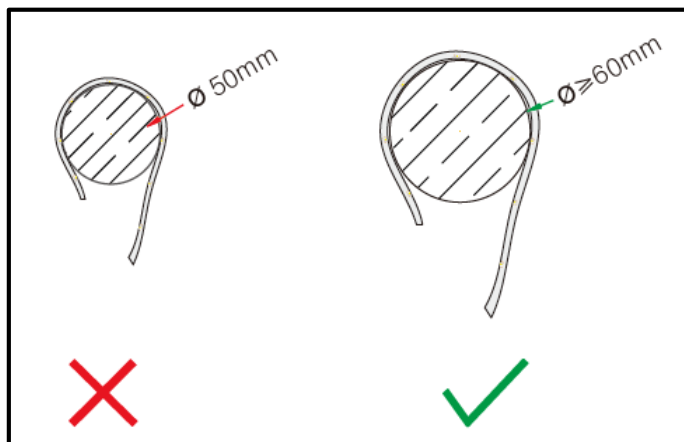

Dimensions:

