


Water Filtration Series



The **WFS Water Filtration Series** is available in configurations that install in-line or onto bulk-heads or walls to offer filtration for 3-6 gpm (12-23 lpm) cold water systems. The housings are rugged and the bowls are see-through. There are four element versions to choose from 5, 30, or 60 micron sediment cartridges or a 5 micron sediment, taste, and odor cartridge. A mounting bracket and a filter service tool are available. Inlet and outlet are both 3/4" NPT and the overall dimensions are 12.5" (32 cm) height x 5.25" (13 cm) width.

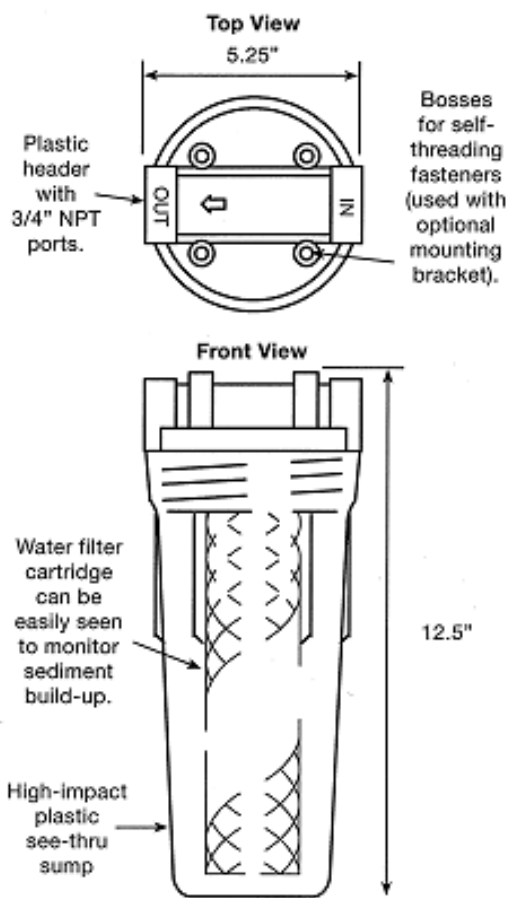

Mounting Instructions:

1. Install in a vertical position only.
2. Install on the cold water supply line only with a maximum pressure of 125 psi (8 bar).
3. Customer-supplied connectors and pipe thread sealant.
4. Do not allow to freeze or overheat [100F (38C) ambient air maximum]
5. Use as a separator for solids only, not designed as a purifier.
6. Do not use for sea (salt) water, micro-biologically contaminated water, or with any other unsafe water source.

To order, please choose the FTG part number assembly/micron rating desired. For example **WFA12-S30** is a 30 micron rating and **WFA12-T5** is a 5 micron rating. The smaller the micron rating the smaller the particulate size that is trapped. S30 and S60 elements are effective in removing rust, sand, algae, and other foreign sediment particles from your cold water supply. The taste and odor element T5 uses activated charcoal filtration media which removes objectionable tastes & odors. Service life of elements is dependent on incoming water quality.

Specifications	WFA12-S5,S30, S60	WFA12-T5
Fluid Filtered	Drinking water, sediment only	Drinking water, sediment & taste
Maximum Flow Capacity	6 gpm (23 lpm)	3 gpm (23 lpm)
Maximum Pressure	125 psi (8.6 bar)	125 psi (8.6 bar)
Inlet/Outlet Port Size	3/4"-14 NPTF	3/4"-14 NPTF
Height	12.5 in. (31.8 cm)	12.5 in. (31.8 cm)
Diameter	5.25 in. (13.3 cm)	5.25 in. (13.3 cm)
Weight	3.1 lbs. (1.4 kg)	3.1 lbs. (1.4 kg)
Operating Temperature (cold water only)	33 to 100 degree F (0.6 to 38 C)	33 to 100 degree F (0.6 to 38 C)

Part Number	Description
WFC-T5B	Replacement carbon element, 5 micron sediment, taste, and odor
WFC-S5B	Replacement element, 5 micron sediment only
WFC-S30B	Replacement element, 30 micron sediment only
WFC-S60B	Replacement element, 60 micron sediment only
WF-035	Mounting bracket. L-shaped plated steel w/ fasteners
WF-037	Rubber seal for the bowl-to-head
WF-039	Wrench to help in the removal of the clear bowl sump

Questions? Please contact us at 800-734-1988 or 209-575-0500, or email to sales@ftgfilters.com

We are here to help.

