



FASTI


4" Recessed LED Downlight
with soft glow technology



Features

- Body**
 Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare.
- LED Characteristics**
 This general application light fixture features a 9 watt LED module that maintains uniform intensity producing up to 550 lumens; with a typical CRI of 90 and a 50,000 hour life span. Available in 3000K or 4000K color temperature
- Dimming**
 100%-10% dimming capability. This fixture is compatible with industry standard TRIAC/ELV dimmers
- Beam Spread**
 The fixture lens provides 120° beam spread.
- Mounting**
 Includes two spring loaded clips to attach to any ceiling material. The slim profile allows to be mounted under joists or duct work.
- LED Characteristics**
 Extruded aluminum hardwire box with 210mA dimmable class electronic LED driver with 100-135V AC input. Includes an 7" cable from driver to fixture.
- Operating Temperature**
 -20°C ~ 40°C
- Environment**
 Suitable for damp locations. Suitable for insulated ceiling applications.
- 90 CRI**
 90 CRI for near perfect colour rendering.
- Soft Glow**
 Soft glow technology creates an exciting experience for dimming LED Soft glow lets you go from bright functional lighting to warm light
- Light output**
 Closer spectral distribution to incandescent lamps
- Operating Temperature**
 -20°C ~ 40°C
- Environment**
 Suitable for damp locations. Suitable for insulated ceiling applications.
- 90 CRI**
 90 CRI for near perfect colour rendering.

Specification

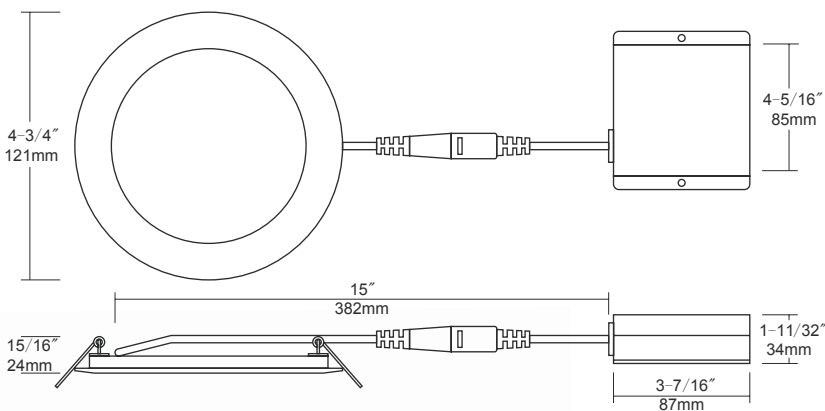



Application	Ceiling Recessed Mount
Approved Location	Insulated Ceilings and Damp Locations
Beam Angle	120°
CCT with soft glow	3000°K dim to 2200°K 4000°K dim to 3200°K
Certification	cETLus
Class II	Yes
Colour	WH
CRI	90
Dimming	Yes
Dimming Tech	ELV
Input	120V AC, 60Hz, 0.11A
LM79	Yes
LM80	Yes
Lumens	550
Lumens per Watt	61.1
Power Factor	>0.9
Projected Life	70% @ 50,000 hrs
Warranty	3 Years
Wattage	9W



www.ovidlighting.com




Ordering Guide

	Colour Temperature	Trim Finish
Fasti		
	30 : 3000°K 40 : 4000°K	WH : White

Photometry

Fasti: 4" Slim Surface, 3000°K.

Zonal Lumen Summary		
Zone	Lumens %	Luminaire
0-30	22.0	2 9%
0-40	58.7	4 6.9%
0-60	616.6	80.6%
60-90	148.7	19.4%
70-100	0.3	7 .9%
90-120	0	0%
0-90	65.3	1 00%
90-180	0	%
0-180	765.3	100%

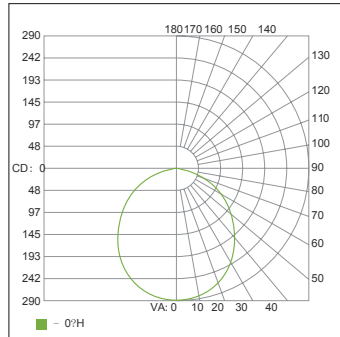

Center Beam FC		Beam Width	
3.3ft	26.5 fc	8.7ft	Illuminance at a Distance
6.7ft	6.44 fc	17.7ft	
10.0ft	2.89 fc	26.4ft	
13.3ft	1.63 fc	35.1ft	
16.7ft	1.04 fc	44.0ft	
20.0ft	0.72 fc	52.7ft	

Vert. Spread 105.6

Compatible Dimmers

Brand Model	Model	Maximum Number of Fixtures per Dimmer
Lutron	DVCL-153P	11
	CTCL-153P	11
	DVELV-300P	24
	SELV-300P	24
	NTELV-300	24
	NTELV-600	48
	MAELV-600	48
	MRF2-6ND-120	12
	DV600	8
Leviton	VPE04	12
	6615	22
	VPE06	45
	VRE06	45
	6672	4
	6674	4
	IPE04	10
	6631	10
	6633- P	10
Cooper	SAL06P-W-K	10



www.ovidlighting.com

