

EVOLVE NIMBUS LINEAR

PROFESSIONAL SERIES LED HIGHBAY

TOTAL OF

4

BEAM PROFILES

UP TO

70%

ENERGY SAVINGS

UP TO

130lm/W

SYSTEM EFFICACY

LIFETIME OF

50,000

HOURS TO L70


3m Flex and Plug

IP67 and IK10 Rated

Available from 100W - 300W

Lumileds Chip, Mean Well Driver


5 Years
Warranty

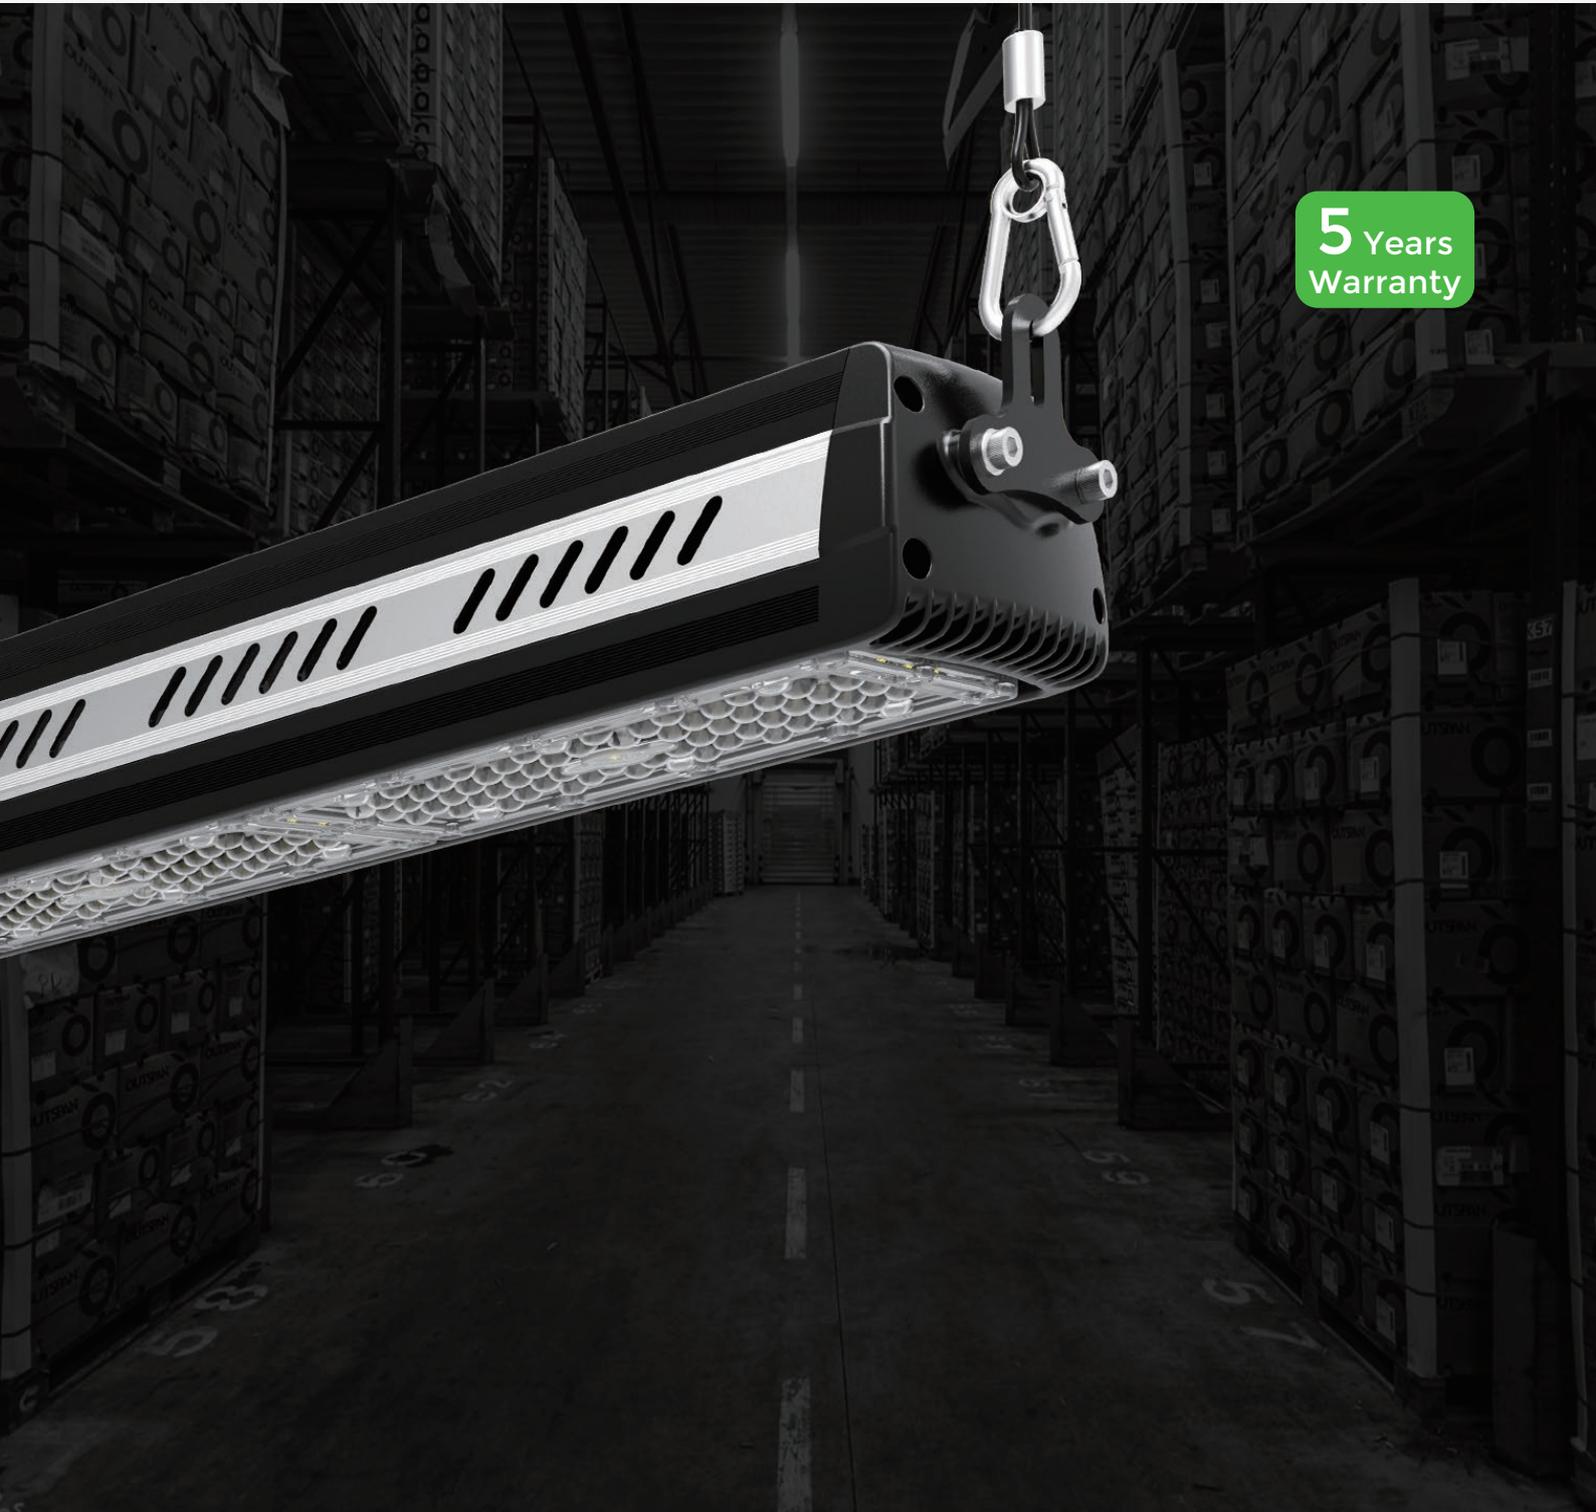

Nimbus Linear Product Range

Product Image				
Product Code	NIMBUSL100CW	NIMBUSL150CW	NIMBUSL200CW	NIMBUSL300CW
Lumen Output	13,000lm	19,500lm	26,000lm	39,000lm
Wattage	100W	150W	200W	300W
Luminous Efficacy	130lm/W			
CCT	4000K			
CRI	>Ra80			
Beam Angle	60°,90°, 120°, 60°x90°			
Input Voltage	100-240Vac 50-60Hz PF ≥0.97			
IP Rating	IP67			
Operating Temp	-30°C ~ +45°C			
LED Driver	Mean Well			
LED Chips	Lumileds 3030 2D			

Photometric Diagrams

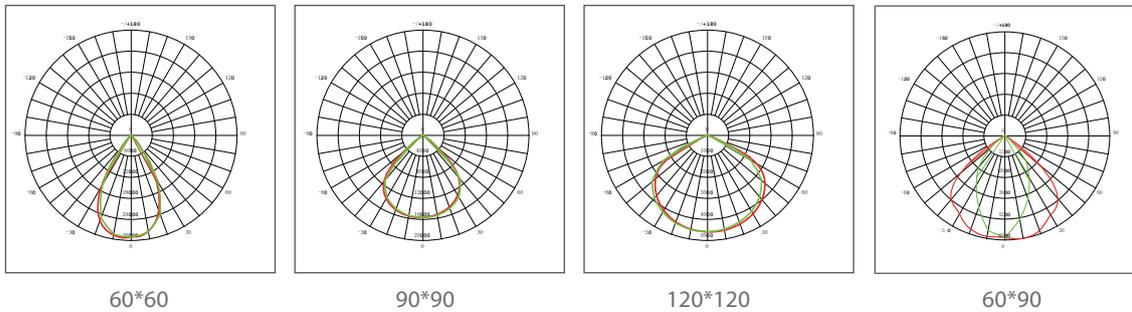

Mounting Types



Suspended
Suspended with 3m quality nylon coated Stainless Steel hanging kit.



Ceiling mounted
Surface mounting kit available for low mounting heights and areas where suspending is not an option. (180° adjustable)



Wall mounted
180° adjustable bracket suitable for wall mounting