



THE
EVOLVE FALCON
PROFESSIONAL SERIES
LED FLOODLIGHT

Designed with only the highest quality in mind, the Evolve Falcon floodlight series combines high-end components for efficiency, with superior build quality for reliability. High output Philips Lumiled LED Chips and Mean Well control gear ensures you will save on both energy and maintenance costs while meeting the highest performance standards. Using our custom beam profile to give a uniform photometric distribution, the Falcon puts the light precisely where it's needed and with an ultra high system efficacy of 120lm/W, there will be plenty of it.

The Falcon offers flexible design options including multiple beam profiles, colour temperatures, RGB colours and dimming. Along with an easy to install universal mounting bracket and angle adjustment makes installing the Falcon a breeze.



ETL DLC SAA C-TICK FCC ROHS CE

Benefits

- Excellent LED Performance with up to 65% energy savings
- The Falcon lasts more than 3x longer than conventional floodlights
- Multiple light distributions available in both asymmetrical and symmetrical profiles. Our custom wide beam profile reduces spill light by putting the light precisely where its needed.
- High quality Philips Lumiled LED chips and Mean Well Driver
- Zero maintenance, no need to relamp
- Replaces conventional floodlights up to 500W

Features

- Ultra efficient system efficacy of 120lm/W
- 50,000 hours life to L70
- Dimmable and RGB models available
- IP65 and IK10 Rated

Applications



- Public spaces
- Industrial areas
- Car Parks
- Perimeters
- Signs/Billboards
- Security areas
- Sports Application
- Building Uplighting
- Rural Applications

Specifications



| | | | |
|---------------------------|---|-----------------------------|---|
| TYPE | EVFLLM200 NW EVFLLM200 NW DIM EVFLLM200 RGB | LED JUNCTION TEMPERATURE | ≤70°C (@ Ta=30°C) |
| LED QUANTITY | EVFLLM200 NW (240 PCS) EVFLLM200 NW DIM (240 PCS) EVFLLM200 RGB R:80 pcs G:80 pcs B:80 pcs | OPERATING TEMPERATURE RANGE | -30 to +45°C |
| LIGHT SOURCE | Philips LUXEON 3030 2D | DRIVER | Mean Well HLG-240H-36A ELG-240H-36A HLG-240H-36B ELG-240H-36B |
| POWER | 200W | MAINS VOLTAGE | 90-305V / 50-60 Hz 347-480V / 50-60 Hz |
| LED INITIAL LUMINOUS FLUX | 24000lm | INRUSH CURRENT | 60 A / 415µs |
| LUMINAIRE EFFICACY | 120lm/W | CONTROLS SYSTEM INPUT | DMX512 |
| COLOUR TEMPERATURE | 4000-7000 K (+/-300K) | DIMMING | 1-10V PWM |
| RGB WAVELENGTH | 620-625nm 526-530nm 455-460nm | MATERIALS | Housing: Aluminum Mounting bracket: Aluminum Option: Stainless Steel Heat sink: Aluminum Stents: High quality iron / Stainless steel Optic lens: Polycarbonate |
| COLOUR RENDERING INDEX | 75 | COATING | Powder coated (passed salt spray test) |
| BEAM ANGLE | 30° / 60° / 60°x135° / 85°x135° | CONNECTION | Three core cable |
| OPTICS | Symmetric / Asymmetric | MAINTENANCE | Regular cleaning of surfaces |
| CLASSIFICATIONS | IP65; IK10; Class I; RoHS | | |

Product details



Beam Angle 30 x 30°

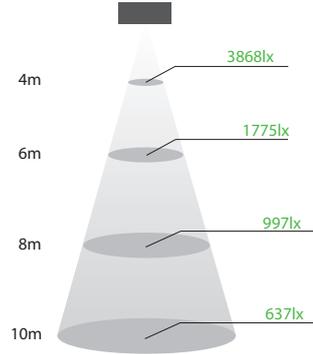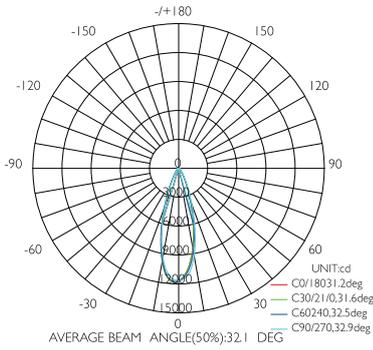



Beam Angle 60 x 60°

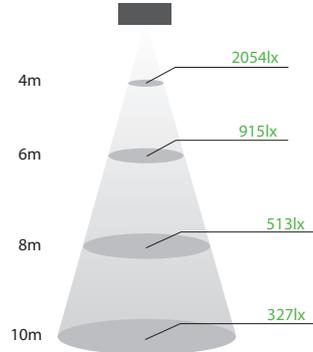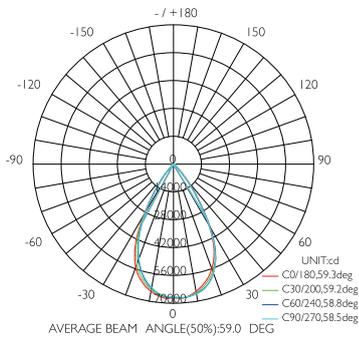

Beam Angle 60 x 135°

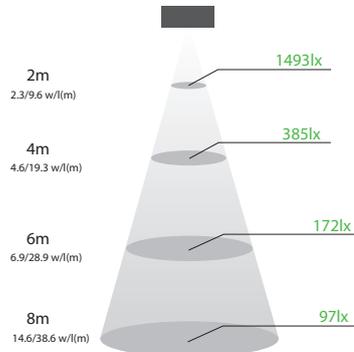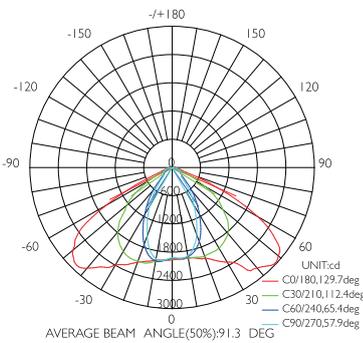



Beam Angle 85 x 135°

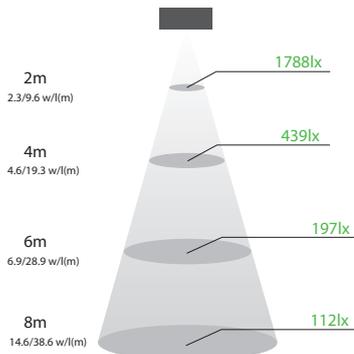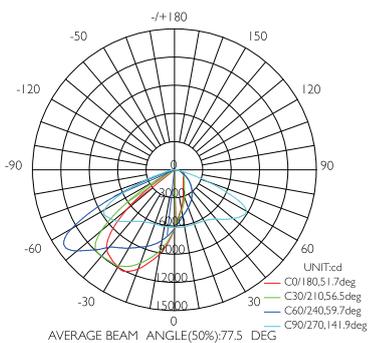

* Test data with PHILIPS LUXEON 3030 LED at 5500-6000K

Dimensional drawings

- Please pay attention to the weight of the floodlight when mounting
- We suggest using M13 screws to fix
- We suggest mounting the fitting at 35°

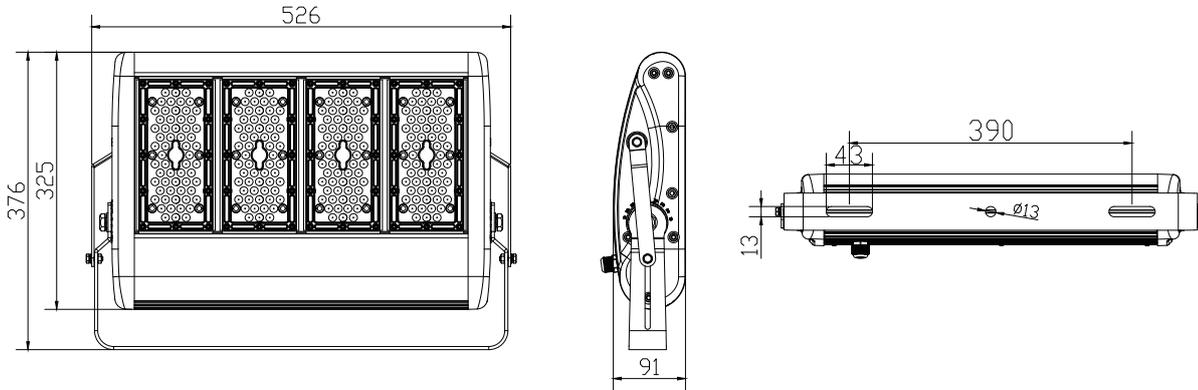

Product details




Front view



Rear view



Side view, right



Side view, left



Angled rear view



Angled rear view showing cable entry.

Package

| Model. | N.W | G.W | SIZE |
|------------------|--------|--------|--------------------|
| EVFLLM200 NW | 8.6 kg | 9.5 kg | 600 x 460 x 185 mm |
| EVFLLM200 NW DIM | 8.8 kg | 9.7 kg | |
| | | | |

| Model. | N.W | G.W | SIZE |
|---------------|--------|--------|--------------------|
| EVFLLM200 RGB | 8.6 kg | 9.5 kg | 600 x 460 x 185 mm |
| | | | |
| | | | |

Evolve Lighting Ltd
 All rights reserved
 Specifications are subject to change without notice

0800 357 6311
www.evolve-lighting.co.nz

