


DMG DE 60BO

HDPE

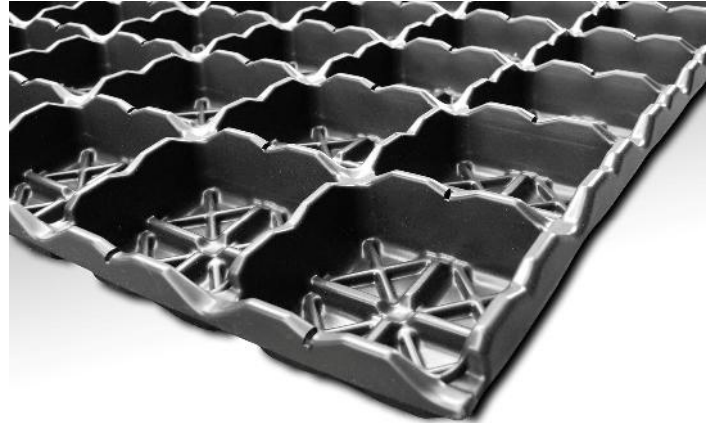

HDPE	
. 60 mm	
2.5 kg/m ²	
/	
. 695 kN/m ²	10%

(Perl)

(DIN EN ISO 12958)	: = 20 kPa, MD, 105
i = 0.01 (=1 %):	0.578 l/(m*s)
i = 0.02 (=2 %):	0.833 l/(m*s)
i = 0.05 (=5 %):	1.356 l/(m*s)
i = 1 ():	6.483 l/(m*s)

. 23.0 l/m² (Perl 8/16)

/	. 2.06 m ² / . 370.8 kg/
---	--

. 370.8 m² / 180
2.05 x 1.05 m

x x	1,998 x 1,031 x 60 mm
-----	-----------------------

.	5.15 kg/
.	950.0 kg/

5/20
(. .),
- 100%
HDPE
DIN 4095