


DMG SGL 500

Optigreen PE TGF 0,2

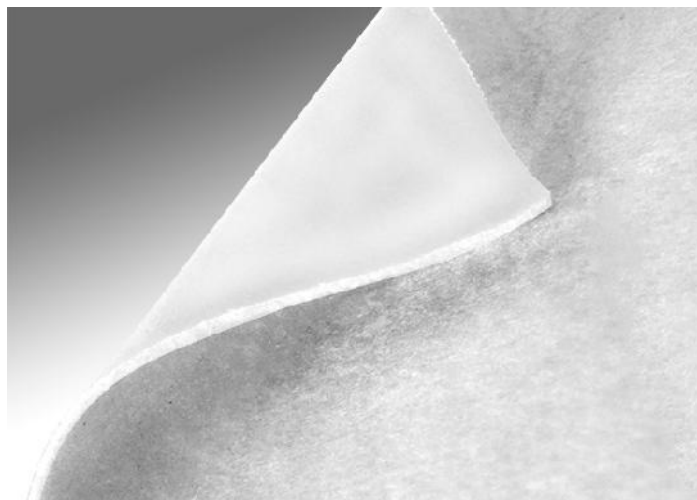

PP ()
LDPE ()
ca. 4,0 mm
. 500 g/m ² ()
. 300 g/m ² ()
. 200 g/m ² ()

	: 12 kN/m (DIN EN ISO 10319)
	: 25 kN/m (DIN EN ISO 10319)
GRK 5	
< 0,6	FLL
(DIN 53375)	
ca. 30,0 kg/	- ca. 265,0 kg/

	. 0,30 m,	. 2,0 m
/	60 m ² /	= 2,0 x 30,0 m
	480 m ² /	
	8	80 x 120 cm

	max. 2
--	--------

--
 0,2) (, ..
 - 100 % PP
 - UV-
 PE-Folie < 0,6 gemäß
 FLL (DIN 53375)
 FLL-
 -
 -
 -

DMG. . DMG