


LED IP65 Luminaire T8D

Benefits:

- 2 versions available: **Single + Double Module**
- Energy saving
- Durability
- Easy to install, remove and replace
- Lower maintenance costs
- UV & IR free light
- Lifetime up to 30,000 hrs
- CRI80
- High quality LED module
- Housing: injection molding, UV stabilized PC body, waterproof gasket in natural silicon gel
- PC or SS clips
- Cover: opal PC light diffusing agent, with 85% light efficacy
- Reflector: Anode oxide treated 3003 alum. Alloy with thermal conductivity
- CRI>80

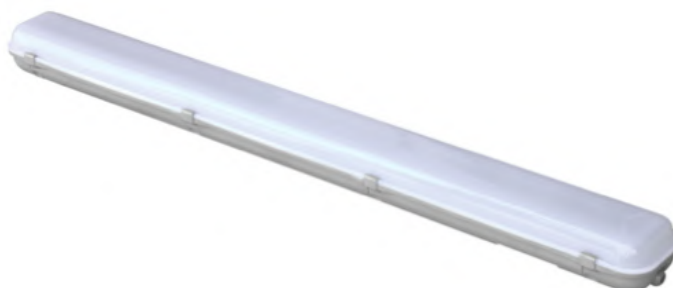

Applications:

- Industries
- Warehouses
- Offices
- Public areas

General Characteristics:

ITEM	WATT (W)	VOLTAGE (V)	FREQUENCY (HZ)	KELVIN (K)	LUMEN (Lm)	LED QTY	Dimension LxWxH mm
T8D-1-18	13	120-277	50/60	4000-6000	1300	26	650x90x90
T8D-1-36	26	120-277	50/60	4000-6000	2600	52	1260x90x90
T8D-1-58	42	120-277	50/60	4000-6000	4500	65	1563x90x90
T8D-2-18	25	120-277	50/60	4000-6000	2600	52	653x125x90
T8D-2-36	50	120-277	50/60	4000-6000	5000	104	1263x125x90
T8D-2-58	60	120-277	50/60	4000-6000	6000	130	1563x125x90

Cautions:

- Please read the contents on the box and label carefully before installation
- Check if the specification e.g. voltage, current etc meet the requirements
- Power must be cut off before installation, replacement and cleaning
- Don't touch the bulb/luminaire while it is on or immediately after turning it off. Please wait 15 min. for bulb to cool down.

Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux tolerance: +/-10%

*Photos, descriptions and details of the product are subject to change without previous notice.