

Directional Antenna, 4.8 to 6.1 GHz, 29 dBi, 65 cm, (2 feet) Solid Dish

High Performance Solid Dish antenna 65 cm (2 feet) with 29 dBi gain at 4.9 to 6.1 GHz band. The shroud reduces side lobes and improves performance in noisy areas.

Heavy duty mounting kit with precision alignment features is included.

QAD0529-65 SD HP has cylindrical shroud and provides reduction in gain of side lobes (less than 2 dBi) ensuring high performance and link throughput by eliminating the effect of existing links in the angles other than main lobe.



Radio Specifications

Frequency range	4.8 – 6.1 GHz
Gain	29 dBi
Side lobe level	ETSI EN 3-302-326 DN-1DN5
Front to back ratio	40 dB
Beamwidth-3 dB	4.0°
Polarization	Dual linear V and H
Cross Polarization	28 dB (Max) 35 dB (Typical)
VSWR	1.4:1
Port to Port Isolation	32 dB (Max) 45 dB (Typical)


Mechanical Specifications

Parabola material	Aluminum Alloy
Size	65.0 cm (2 ')
Depth	18.5 cm
Input/output	Dual N-Type
Mast size allowed	25 - 60 mm
Operational wind load	130 km/h (80 mph)
Survival wind load	190 km/h (118 mph)
Antenna weight	4 Kg (8.81 lbs.)
Mounting Kit weight	3 Kg (6.61 lbs.)
Pack options	2 pack / 6 Pack




The antenna is supplied together with a bracket that allows easy mounting on a mast. Bracket can be installed separately on the mast. It come with a versatile bracket which allows precise adjustment in both directions. Whole antenna system has extreme wind stability.

Radiation Patterns:

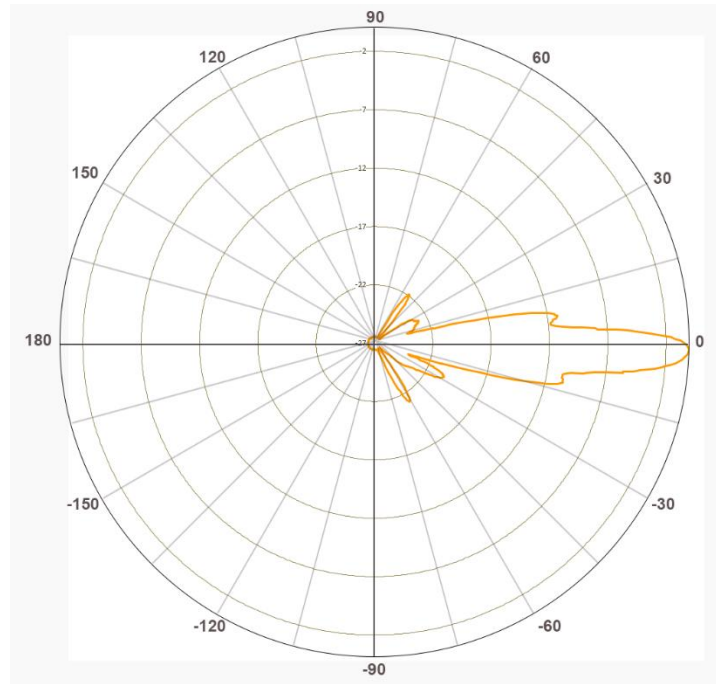

E-Plane Pattern (QAD 0529 - 65 SD)

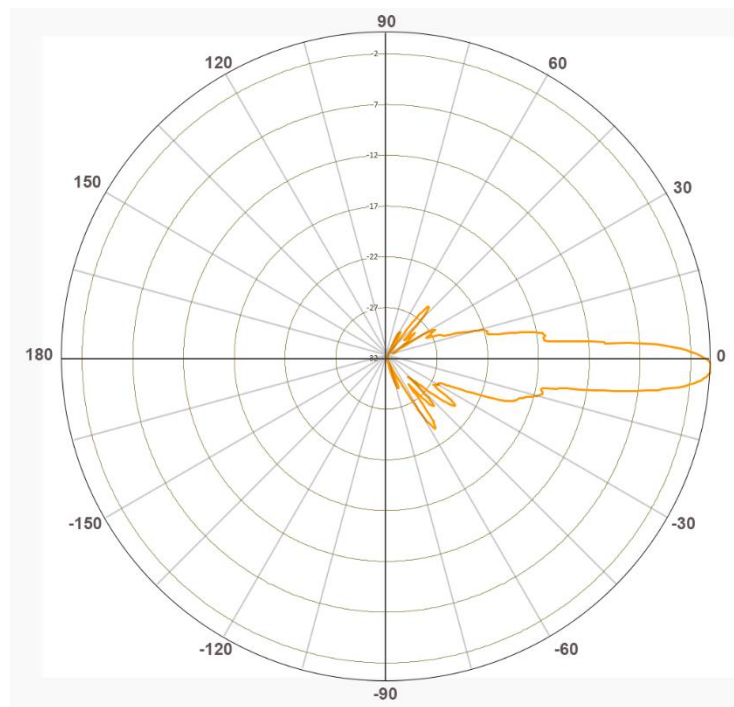

H-Plane Pattern (QAD 0529 - 65 SD)

Outlines:

