



## Gfp 865DH-3

### Professional Dual Heat Laminator

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 865DH-3 delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

#### ULTIMATE FLEXIBILITY

*Dual heat for thermal & cold apps*

#### PROFESSIONAL FEATURES

*Produce Professional results*

#### FAST ROLL CHANGES

*Front/Rear Swing-out shafts*

#### EASY LOADING

*3" Quick-Grip Swing-out Shafts*

#### INDUSTRIAL DESIGN

*Years of maintenance-free service*




***laminating • mounting • encapsulating***

***Our most flexible, cost-effective laminator yet***

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.



- Labor saving swing-out 3" Quick-Grip supply shafts
- Drop-in Quick-Grip rewind shafts
- Photoelectric eye for operator safety
- Independent top and bottom heaters
- Web clutch adjustment for output quality
- Optional motorized rear rewind
- Swing up feed table and 38" output height

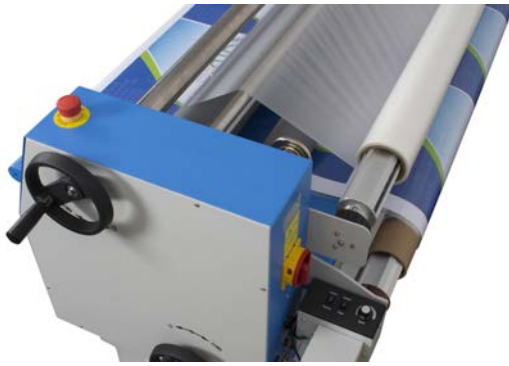

Motorized rear rewind for roll-to-roll applications

Media Alignment Disks prevent media supply roll from telescoping during operation.



disks

## 865DH-3

Rugged Design  
Professional Quality  
Proven Performance  
Economically Priced

### APPLICATIONS

Signs  
Posters  
POP Displays  
Trade show displays  
Dry-erase boards  
Graphic mounting  
Photo mounting  
Floor graphics  
Window graphics  
Vehicle graphics

cTUVus  
Safety  
Approval



### Warranty:

1 year parts & labor.  
Installation is included.

Laminating Width	65"
Roller Diameter	5"
Roller Gap	1"
Main rollers	Silicone
Supply roll diameter(max)	16" bottom, 8" top
Film shafts	3" aluminum Quick-Grip
Rear rewind	Optional
Max. temperature	266°F
Heat method	Quartz heater
Film thickness	1.5 - 10mil
Laminating speed	0-13 ft/min
Drive motor	DC geared motor
Pressure Adjustment	Dual hand wheels
Roller heating	Top & Bottom
Power Supply	240v 60HZ Single phase 24A
Power Consumption	Max. 5760W
Net Weight w/ stand	767 lbs.
Dimensions	87" x 34" x 49"
Machine shipping	893 lbs. 90 x 38" x 33"
Stand shipping	134 lbs. 79 x 33" x 15"

Your local dealer is:



Nationwide service support through local dealers.

Gfp provides product and application knowledge, machine service, installation, and training.