


TRACTION NUBS
INCREASE FRICTION

4 CORNER LOCKING
FOR MAXIMUM LONGITUDINAL
AND VERTICAL RESTRAINT


LARGE OPENINGS FOR
MAXIMUM INFLOW
147 SQ IN / LF
OPEN AREA

HOT DIP GALVANIZED
FINISH


ISOMETRIC VIEW

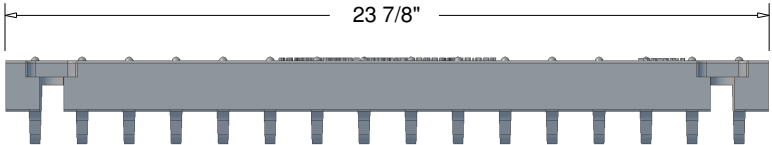

SIDE VIEW

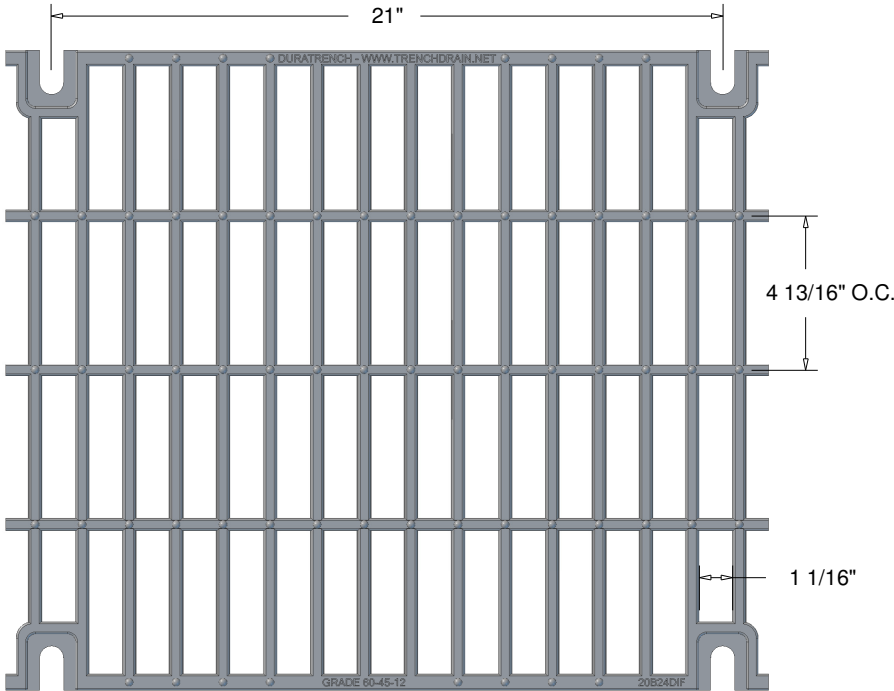

TOP VIEW

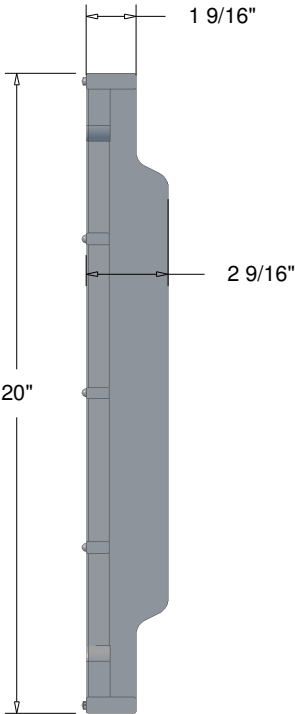

END VIEW

MATERIAL	DUCTILE IRON 65-45-12
COATING	HOT DIP GALVANIZED
LOCKING	4 - 1/2" STAINLESS STEEL BOLT
LOAD RATING	EXCEEDS FAA AC150/5320-6E AIRCRAFT LOADING
ADA / HEEL GUARD	NO

STANDARD TOLERANCES
0 = +/-0.25
0.0 = +/-0.25
0.00 = +/- 0.13



574c Industrial Way N.
Dallas, GA 30132
PH: 770-505-6575
www.trenchdrain.net