

DYNAFOUNT NEUTRAL PLUS


Neutral Based Fount for Newspaper & Insert

Neutral is designed for Newspaper and Insert printers running cold and heat set webs. Strongly buffered to maintain a neutral pH in all water conditions. Good wetting characteristics and good desensitization properties, Dynafount Neutral Plus will keep water settings to a minimum. During press stops it will ensure the plate stays desensitized and free from oxidation.

- Buffered to a stabilized neutral pH
- Keeps water settings to a minimum
- Good wetting and desensitizing properties
- Helps to print denser colors
- Made for high-speed webs

Direction For Use:

Recommended dosage range - 3 oz. to 5 oz. per gallon.
Conductivity per ounce is 275 micromhos.
We recommend starting with 3 oz./gallon.
Once running, adjust dosage up or down as needed.

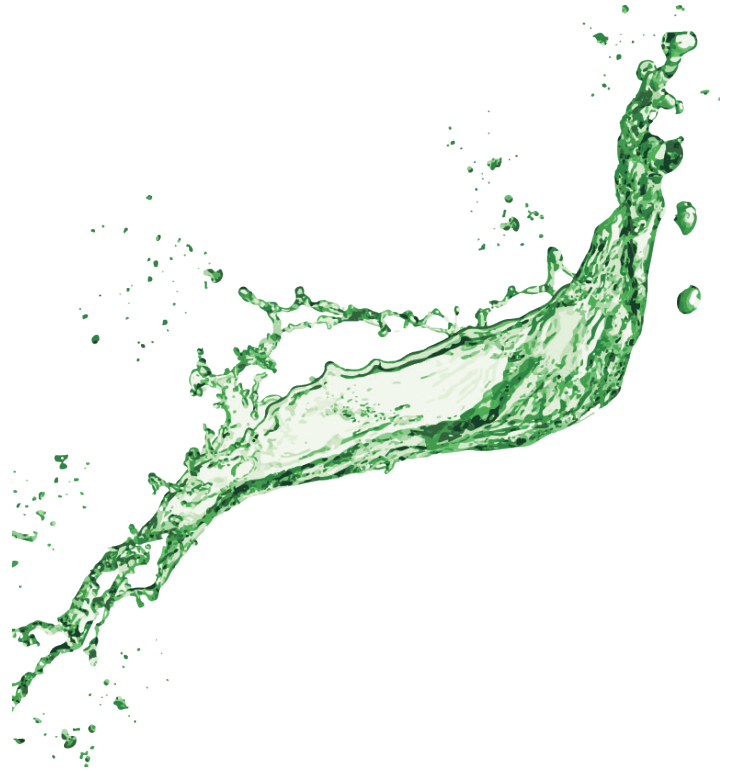

Recommended dosage range 2.5% to 4%.
Conductivity per 1% is 350 micromhos.
We recommend starting with 2.5%, adjusting dosage up or down as needed.

Specifications:

VOC content lb. / gallon	0.4
VOC content grams / liter	48
Flashpoint	<200°F
Color	Green
CA. Compliant	Yes

Available In:

Product Code	Unit	Case Qty.
10076G	55 Gallons (208 ltr)	Each
10076T	275 Gallons (1040 ltr)	Each



VOC COMPLIANT Air Quality Management District Compliant

