

# PRESS CONTROL CTP+

## Fountain Solution / Alcohol Replacement

Press Control CTP+ is designed for use with most all plates. Contains extra lubrication and wetting agents. To ensure performance without causing image degradation, on going chemical resistance tests are done on most brand of plates as they appear in the market. Contains a balanced blend of the appropriate acid salt combination providing a stable pH in all waters with little or no drift. Biocides keep the fount system free of mold, sequestrates counteract the effects of dissolved calcium, corrosion inhibitors protect the printing plate and press equipment, anti-foaming agents reduce or remove mechanical and chemical foam. Keeps plate background coated with a thicker water film to ensure stable water settings.


- Use as a single step fountain solution and alcohol replacement
- For use on all plates (ctp / analog, violet, thermal and polyester)
- For use on sheet-fed and web presses
- Keeps reverses, screens and halftones sharp
- Stays active longer by countering the affects of dissolved calcium

### Direction For Use:

Recommended dosage range - 3 oz. to 6 oz. per gallon.  
Conductivity per ounce is 150 micromhos.  
We recommend starting with 5 oz./gallon.  
Once running, adjust dosage up or down as needed.

### Specifications:

VOC content lb. / gallon	2.4
VOC content grams / liter	288
Flashpoint	None
Color	Purple
CA. Compliant	Yes

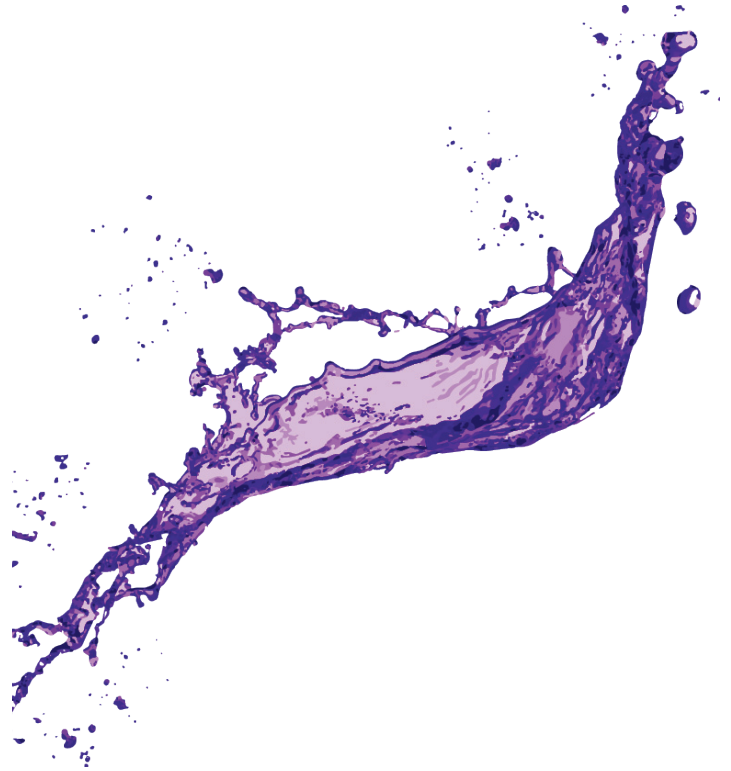

Recommended dosage range 2.5% to 5%.

Conductivity per 1% is 200 micromhos.

We recommend starting with 4%, adjusting dosage up or down as needed.

### Available In:

Product Code	Unit	Case Qty.
10030TD	1 Gallon (3.785 ltr)	4
10030TE	5 Gallons (18.9 ltr)	Each
10030TF	30 Gallons (113.6 ltr)	Each
10030TG	55 Gallons (208 ltr)	Each
10030-275T	275 Gallons (1040 ltr)	Each

