

LATITUDE DPM

Multi Purpose Fountain Solution


Latitude DPM permits a stable ink/water balance to be achieved at lower ink and water settings. Cleaner, sharper and brighter colors result, with no tinting. Formulated to run with integrated dampening systems common on smaller presses. Capable of being used with metal and polyester plate systems.

Latitude DPM contains a balanced pH buffering system which ensures little or no pH drift. Contains materials to guard against mold growth and chemical plate blinding.

- Fast start ups
- Use with polyester(laser & silver image)
- Use with metal
- Controlled water pick-up in ink
- More salable sheets, faster start-up
- Eliminates tinting and ink build-up
- Prevents oxidation spots during stoppages
- Compatible with oil, and rubber based inks

Direction For Use:

Recommended dosage range - 5 oz. to 8 oz. per gallon.
Conductivity per ounce is 75 micromhos.
We recommend starting with 5 oz./gallon.
Once running, adjust dosage up or down as needed.

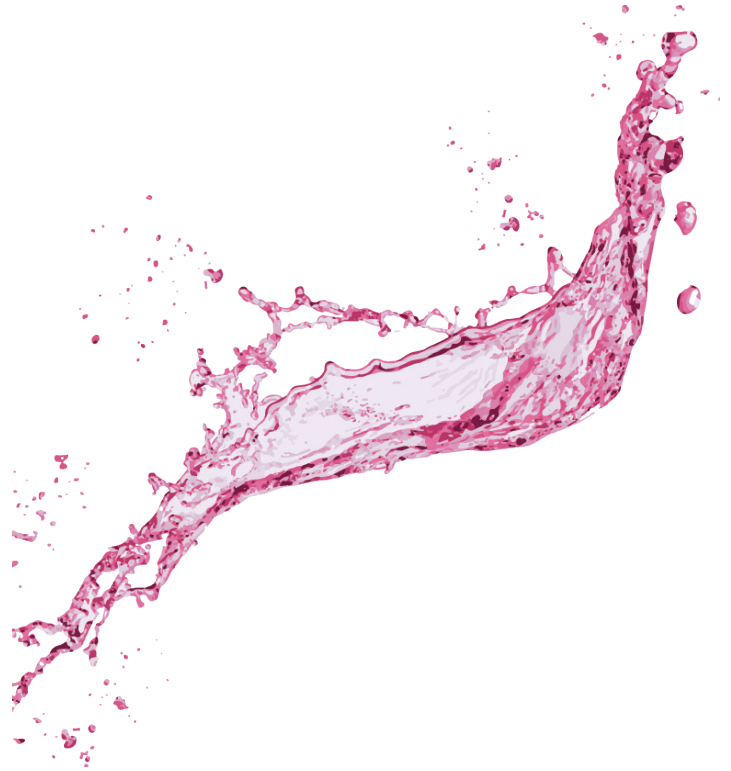

Recommended dosage range 4% to 6.5%.

Conductivity per 1% is 96 micromhos.

We recommend starting with 4%, adjusting dosage up or down as needed.

Specifications:

VOC content lb. / gallon	1.5
VOC content grams / liter	179
Flashpoint	105°F
Color	Pink
CA. Compliant	No

Available In:

Product Code	Unit	Case Qty.
10018D	1 Gallon (3.785 ltr)	4
10018E	5 Gallons (18.9 ltr)	Each
10018G	55 Gallons (208 ltr)	Each
10018T	275 Gallons (1040 ltr)	Each

