


# BULLDOG A2L

## Vacuum Pump

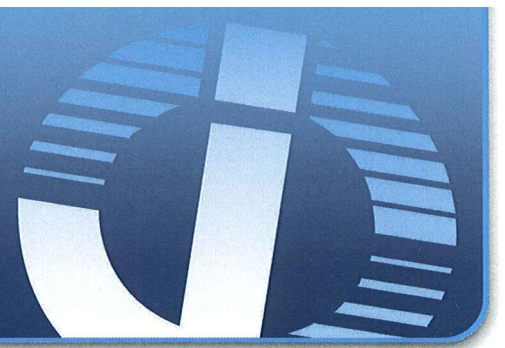

**NON SPARKING**

### TECHNICAL SPECIFICATIONS

**Voltage**

All units:  
220/240V / 50Hz

**Vacuum**

All units:  
1.5 micron

**Intake Fittings**

All units:  
1/4 SAE  
3/8 SAE

**Warranty**

All units:  
12 months



### Features and Capabilities

- ▶ Spark Proof Design
- ▶ Two Stage Oil Sealed Vacuum Pump
- ▶ Isolation Solenoid Valve
- ▶ Ultimate Vacuum of 1.5 Micron
- ▶ Dual-oil Demister to Prevent Mist & Smoke
- ▶ 1/4" SAE & 3/8" SAE Connection Fittings

Features	BULLDOG 50	BULLDOG 100	BULLDOG 160
Free Air Displacement	50 l/min	100 l/min	156 l/min
Power	240W	290W	460W
Motor Speed	1440 rpm	1440 rpm	2880 rpm
Oil Capacity	400ml	450ml	450ml
Dimensions	325x192x223mm	338x212x238mm	338x212x238mm
Weight	9.2kg	12.2kg	12.5kg

Part Number		
VBD502	BULLDOG 50	50L/min
VBD1002	BULLDOG 100	100L/min
VBD1602	BULLDOG 160	156L/min

Speak to JAVAC  
for your nearest stockist  
**1300 786 771**



Vacuum and Refrigeration Process Technology  
1300 786 771 – [www.javac.com.au](http://www.javac.com.au)