




Motor Protection Electronics, Inc.
 2464 Vulcan Rd. Apopka, Florida 32703
Phone: 407-299-3825
Fax: 407-294-9435
Email: info@mpeelectronics.com
Website: www.mpeelectronics.com

ITEM # 010-120-122P, DUPLEXER

The DUPLEXER (010-120-122P) is a low cost SCADA ready plug-in pump controller designed to perform level control for duplex lift station applications. The level inputs of this dual pump controller can be connected to either four float switches or to a conductance probe. This 2 pump controller provides a 10 second power-up start delay, 5 second lag pump delay, and duplex alternation. LEDs provide power on status, level input status, pump call status, and high level alarm status indication. Pump 1

[+ more](#)

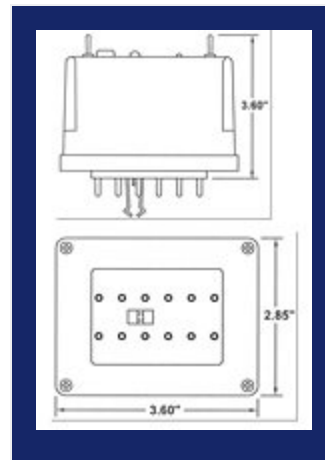

[Specifications](#) | [Features](#) | [Additional Description](#)

Specifications

UL File No.	#E101681
Operating Voltage (AC)	120 V
No. of Outputs	2
Supply Phase	Single Phase
Supply Frequency	50/60 Hz
Output Contact Rating	SPST, 6A

Display Indicator	LED's
Enclosure Material	Polycarbonate Plastic
Plug-In Base Material	Rynite
Operating Temperature	-20 to +60 °C
Storage Temperature	-45 to 85 °C
Socket	SD12PC
Serial Port	D-Sub9 RS232 Connector
Communications Protocol	MODBUS RTU
Switches	Alarm Reset/Level Simulation H-O-A (2) Lead-Lag Select
Level Inputs	Floats or Conductance Level Probe
Indication	Power On Level Pump On (2) Alarm Latched Alarm

Features

- Solid State Circuitry
- Low Power Inputs
- Output Indicators
- Power On Indicator
- High Level Alarm
- Surge Protected Outputs
- Fail Safe Operation
- Time Delayed Outputs
- Internal Latching
- Plug In Base

Additional Description

The high level status indication latches upon high level, until reset by pressing the reset push-button (the relay does not stay latched).

Additional Description

Level simulation is accomplished by pressing and holding the push-button. Releasing the push-button allows the simulated level to return to normal. Connecting the serial port to a SCADA system allows the lift station to be monitored and controlled remotely. By connecting a programming device to the serial port (MPE p/n TSID), a number of settings may be accessed to customize the unit.