



LEXUS LS430 (2001-2006)

PART NUMBER: LX-52-01

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit VSM®.

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

Pro.Fit logo and part number will be right side up and readable when installed.

TOOLS REQUIRED: # 2 Phillips screwdriver, hook tools, protective cloth, 10mm socket and driver, 5/64" drill bit and drill, marking pen.

PARTS INCLUDED: Pro.Fit VSM®, instructions, three (3) #8 x 1/2" screws.

LOCATION: Right of Radio



WARNING: Place a clean, protective cloth over the gear shift lever before starting this installation. Use extreme caution while working on this vehicle. It has wood grain panels that scratch very easily!

STEP 1. Begin by removing the lower panel that holds the seat heater switches. **Carefully** insert a hook tool behind the panel and **gently** pull towards you, releasing two (2) **Heater** clips, one (1) each on the left and right side. (See photo #1). Unplug the electrical connector on the back and set panel aside. Locate and remove the three (3) Phillips screws exposed by removing the lower panel. (See photo #1). Open the panel that covers the CD player by pushing on it. **Carefully** insert a hook tool in the left and then right corner to release two (2) clips. (See photo #1). When the clips are released, the panel will slide off. Unhook the wiring harness on the back and set the panel aside.


STEP 2. Removal of radio. **DO NOT disconnect any wires to the radio!** Remove the two (2) 10mm bolts at the base of the radio, one on the left and one on the right. (See photo # 1). Place your hand under the radio while pulling it forward. There are two (2) clips, one middle left and one middle right that will release as you pull the radio out of its cavity. (See photo # 2). Set the radio gently aside.

STEP 3. Place the VSM® against the dash pad as shown in photo # 3. The top of the VSM® will touch the bottom of the air vents (Photo # 4) or the climate control panel (Photo # 5), depending on if the car has GPS or not. Using the VSM® as a guide, mark the location of the three (3) screw holes. Drill three (3) pilot holes at the marked location using a 5/64" drill bit and drill. **These holes should be no more than 1/4" deep.** Align the Pro.Fit VSM® over the pilot holes, insert three (3) # 8 x 1/2" screws and tighten. Reassemble the dash in reverse order.

This completes the installation of your Pro.Fit VSM®.

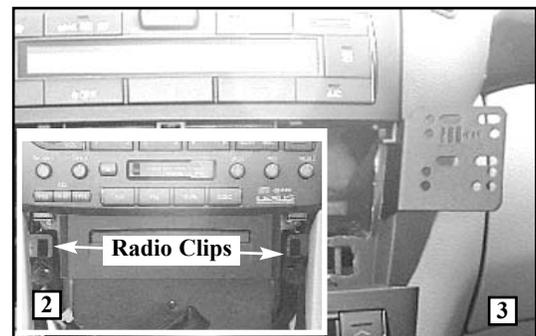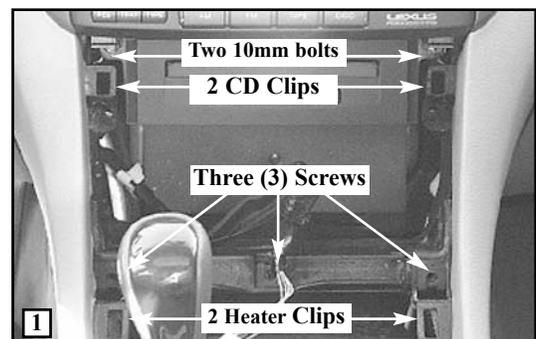

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876





LEXUS

ES300 (2002-2003)

ES330 (2004-2006)

PART NUMBER: LX-52-01

PAGE 2

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit VSM®.
All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

Pro.Fit logo and part number will be right side up and readable when installed.


TOOLS REQUIRED: # 2 Phillips screwdriver, hook tools, protective cloth, 5/64" drill bit and drill, marking pen.

PARTS INCLUDED: Pro.Fit VSM®, instructions, three (3) #8 x 1/2" screws.

LOCATION: Right of Climate Control.

WARNING: Place a clean, protective cloth over the gear shift lever before starting this installation. Use extreme caution while working on this vehicle. It has wood grain panels that scratch very easily!

STEP 1. Begin by setting the parking brake and putting the gear shift into neutral. Remove the gear shift bezel by inserting a hook tool behind the lower left corner and pulling up gently, releasing a retainer clip. There are eight (8) clips holding the bezel in place. (See photo # 1). Work the hook tool from back to front until all clips are released. Lift the trim bezel over the gear shift and set to the side. Do not disconnect any wiring to the bezel.

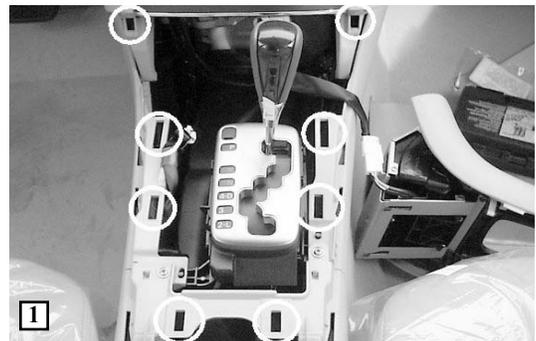

STEP 2. Next, remove the climate control from the dash. The climate control is held in place with five (5) clips. There is one in each corner and one at the top and center of the climate control. Insert a hook tool behind the lower left corner of the climate control and pull outward, releasing a clip. These clips are very tight, so they will not release as easily as the bezel clips did. Work a hook tool around the climate control, pulling outward, until all the clips are released. Pull the climate control out of its cavity and set to the side. **DO NOT disconnect the wiring to the climate control.**




STEP 3. Place the VSM® against the dash pad as shown in photo # 2. The top of the VSM® will touch the bottom radio module. Using the VSM® as a guide, mark the location of the three (3) screw holes. Drill three (3) pilot holes at the marked location using a 5/64" drill bit and drill. **These holes should be no more than 1/4" deep.** Align the Pro.Fit VSM® over the pilot holes, insert three (3) # 8 x 1/2" screws and tighten. Reassemble the dash in reverse order. Put the gear shift into park and release the parking break.



This completes the installation of your Pro.Fit VSM®.

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876



© Pro.Fit International, Eagan, MN 2005

**VIEW INSTRUCTIONS & UPDATES
ONLINE @
WWW.PRO-FIT-INTL.COM**



LEXUS GX470 (2003-2006)

PART NUMBER: LX-52-01

PLEASE READ COMPLETE INSTRUCTIONS BEFORE INSTALLING THIS Pro.Fit VSM®.

All instructions assume a drivers seat vantage point. Caution is advised when removing and reassembling wood or plastic parts of a dash. Applying unnecessary force or pressure may cause a piece to crack or break.

Pro.Fit logo and part number will be right side up and readable when installed.

TOOLS REQUIRED: # 2 Phillips screwdriver, protective cloth, 5/64" bit and drill, dash trim removal tool DM-40-22.

PARTS INCLUDED: Pro.Fit VSM®, instructions, three (3) #8 x 1/2" screws.

LOCATION: Right of Radio

WARNING: Place a clean, protective cloth over the gear shift lever before starting this installation. Use extreme caution while working on this vehicle. It has wood grain panels that scratch very easily!


STEP 1. Start by removing the trim bezel right of the gear shift lever. **(Photo #1).** Insert a dash trim removal tool under the bezel and pry upward, releasing a retainer clip. Move the tool forward to release all the clips. Set trim bezel aside.

STEP 2. Next, remove the vent panel located to the right of radio and climate control module. **(Photo #2).** Insert the removal tool behind the top of the vent assembly and pry outward, releasing a clip. Continue downward until all clips are released. Pull the vent slightly out of the dash cavity. Disconnect the wiring to the switch on the back of the vent. Set the vent aside.

STEP 3. With the vent removed, place the **VSM** against the right side of the vent cavity. **(Photo #3).** Align the center screw hole at the same height as the center of the clip hole. Slide the **VSM** into the dash until it stops, and press against the right dash pad. Using the **VSM** as a guide, mark the location of the three (3) screw holes. Set the **VSM** aside.

STEP 4. Drill three (3) pilot holes at the marked location using a 5/64" drill bit and drill. **These holes should be no more than 1/4" deep to avoid drilling completely through the dash.** Align the **Pro.Fit VSM** over the pilot holes, insert three (3) # 8 x 1/2" screws and tighten. Reassemble the dash in reverse order, remembering to reconnect the wiring to the back of the vent.

This completes the installation of your **Pro.Fit VSM®**.

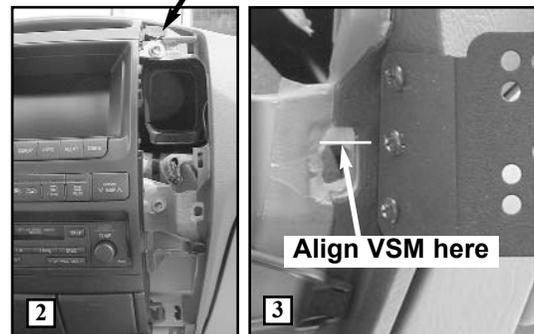

Pro.Fit International, Inc.® may not be held liable for any damage to a vehicle before, during or after the installation or removal of this Pro.Fit VSM®. Pro.Fit may not be held liable for any personal injury resulting from accident or improper installation. Pro.Fit International, Inc.® 1335 Eagandale Court, Eagan, MN 55121, Ph: 651-688-3588 or 800-388-0073 Fx: 651-688-9876

