

BPN-Series

Universal pneumatic press

Pneumatic universal presses range for drawers, door and frames assembly.

This family of manual presses are equipped with cylinders with a quick adjustment. Its studied mechanism for fixing on the work surface, allows you a quickly change the position of the same to suit the geometry of the part.

The use of a single fix bolt will allow you to adjust the cylinders in any direction. This system allows you to press curved pieces also.



.....
Extras:

- * It has double bracket for pressing that allows you to work in two independent workplaces.
- * It working dimensions and number of cylinders are according to customer specifications.

Fast adjustment.
Fixing system by *Half a turn*





Fixing mechanism that allows you
to press in any direction.



BPN-Series TECHNICAL SPECIFICATIONS

PRESS SPECIFICATIONS	BPN-2510	BPN-2815
Maximum length (X)	2.550 mm	2.800 mm
Maximum height (Y)	1.050 mm	1.500 mm
Maximum width (Z)	120 mm	120 mm
PRESS STRENGTH		
Maximum lateral strength (Fx)	400 kg	600 kg
Maximum vertical strength (Fy)	600 kg	600 kg
PRESS ELEMENTS		
Number of pneumatic cylinders	2+3 units	3+3 units
Internal diameter of cylinder \varnothing	63 mm	mm
Cylinder stroke	100 mm	100 mm
PNEUMATIC CONNECTION		
Maximum working pressure	8 bar	8 bar
EXTERNAL DIMENSIONS / WEIGHT		
Length x Height x width (L x H x W)	3.300 x 2.000 x 1.100 mm	3.600 x 2.100 x 1.200 mm
Weight	590 kg	830 kg

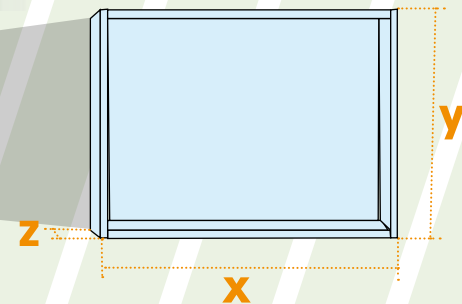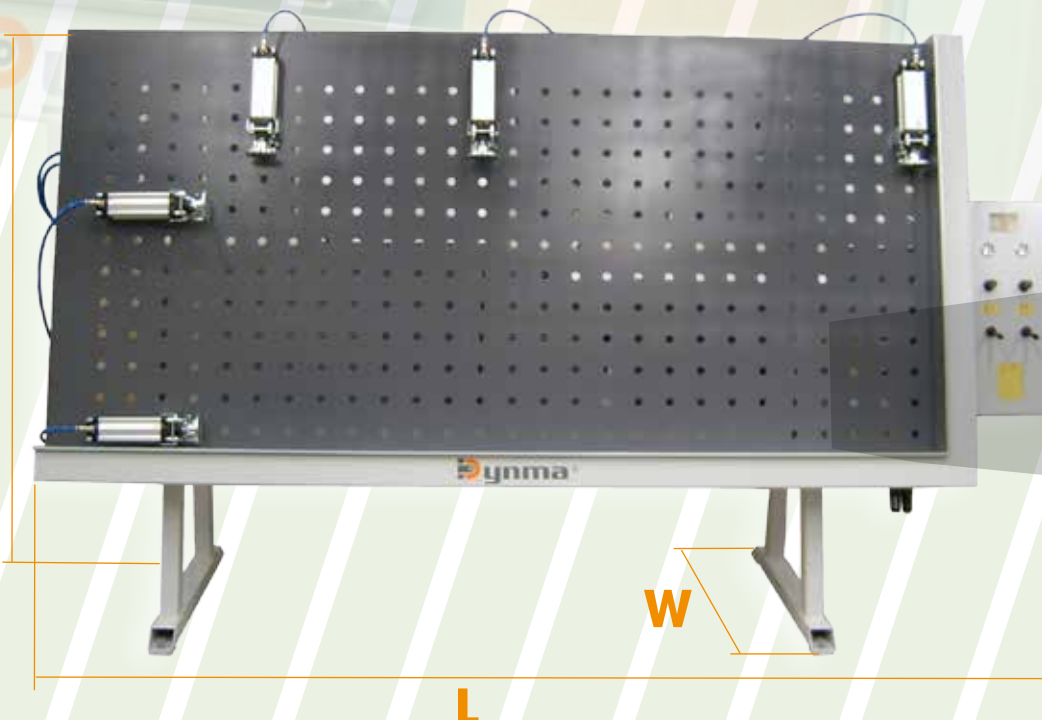

Copyright 2017. **Desarrollo Industrial de Maquinaria Benicarló S.L.**
 The information contained in this document is subjected to change and it is not binding.

DYNMA is a registered trademark by Desarrollo Industrial de Maquinaria Benicarló S.L.