


Isolated USB to TTL UART Converter

ISO-UART-078C

ACK6

Embedded Productivity™

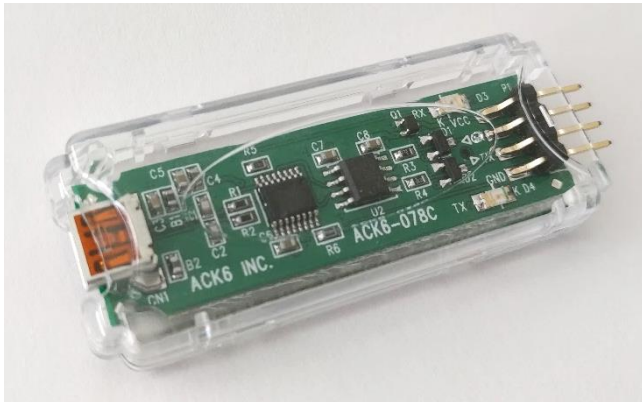

PRODUCT FEATURES

- Works from 1.8V to 5V – no jumpers or solder bridges required.
- Up to 921600 baud
- Reverse polarity protection
- ESD protection
- Micro B connector to USB Host

Product Information

- Isolated Connection for Safety – Isolation IC rated at 5000 Vrms
- Visible Indication for TX and RX through LEDs
- No Special USB Drivers needed, automatically configures as COM Port
- Encased in clear plastic enclosure for protection
- Board comes with 4-pin right angle header preinstalled
- Order includes USB cable and 4-pin to 4-pin female cable
- 4-pin 0.1" (2.54mm) connector allows flexible attachment to Target Board


SPECIFICATIONS

Power	
USB	5V
Voltage In	1.8V – 5V
LEDs	
RED	Transmit (TX)
GREEN	Receive (RX)
Physical	
Dimensions	6.0 x 2.2 x 0.9 cm (2.36 x 0.86 x 0.35 in)
Enclosure	Plastic

Ordering Information

Product: ISO-UART-078C

Order From: <http://www.ack6.com>

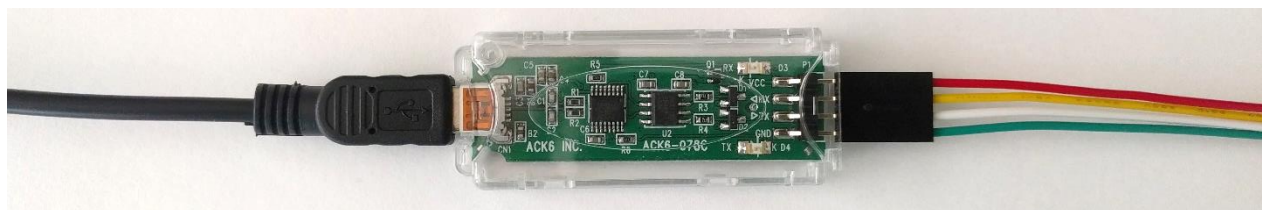

ACK6

Embedded Productivity™

ACK6 Inc.
(602) 295-3896
sales@ack6.com

16815 S. Desert Foothills Pkwy, Ste 121
Phoenix, AZ 85048