

KOLD-DRAFT[®]

ice machines • bins • crushers • dispensers



WE ARE A FRIENDLY, FLEXIBLE COMPANY,
AND OUR ICE MAKERS ARE PRETTY DARN SMART, TOO.

KOLD-DRAFT	OUR HISTORY	01
	GB1060 ICE MACHINE	02
	GB560 ICE MACHINE	03
	GT560 ICE MACHINE	04
	GT360 ICE MACHINE	05
	T280 ICE CRUSHER	06
	AKD125 ICE CUBE & WATER DISPENSER	07
	SC200 SERIES ICE MACHINE	08
	ICE BINS	09

DETERMINING MODEL NUMBERS

HOW TO DETERMINE THE MODEL NUMBER. WHAT DO THE LETTERS AND NUMBERS MEAN?

GT = 30" machine
GB = 42" machine

36 = up to 300 lbs. of ice per 24 hours (GT only)
56 = up to 500 lbs. of ice per 24 hours
106 = up to 1000 lbs. of ice per 24 hours (GB only)

1 = 115 Volt, 60 Hz
4 = 208-230 Volt, 60 Hz
7 = 208-230 Volt, 50 Hz ***

A = Air Cooled
L = Liquid Cooled (water)
R = Remote Cooled
(GB1064, GB564, and GT564 only)

C = Full Cube
HK = Half Cube
K = Kublet

All Remotes require a separate remote condenser and lines sets to connect the 2 pieces of equipment together.

EXAMPLE:

GT361AC

- 30" Wide
- up to 300 lbs. of ice
- 115 Volt
- Air Cooled
- Full Cube Size

GB564LHK

- 42" Wide
- up to 500 lbs. of ice
- 208-230 Volt
- Liquid Cooled
- Half Cube Size

GB1064RK

- 42" Wide
- up to 1000 lbs. of ice
- 208-230 Volt
- Remote Cooled
- Kublet Cube Size



KOLD-DRAFT

ice Machines • bins • crushers • dispensers

OUR HISTORY



Founded in 1920 in Dayton, Ohio, KOLD-DRAFT's original name was Uniflow for the type of pumps manufactured. In 1926, the plant was moved to its current location in Erie, Pennsylvania. It was from this location that KOLD-DRAFT's reputation for innovation and pure dependability began.

In 1955, KOLD-DRAFT began producing automatic ice machines. Using a unique evaporator and water plate system, KOLD-DRAFT's design produced perfect, pure, clean, hard ice cubes—every time. The "upside down" horizontal evaporator was the key. Water is shot up into the evaporator cells at an incredibly high rate of speed and freezes from the outside in.

This system washes out minerals and foreign substances before the water freezes, producing pure cubes that melt slower. Slower melting ice brings drinks closer to the temperature of the ice without diluting them, keeps food colder longer, and lasts longer in coolers.

World-wide, the finest restaurants, hotel chains, mixologists, bartenders and cocktail enthusiasts call for beautifully crafted ice as the starting point for their food and beverages. Ice is the starting point of any beverage. With KOLD-DRAFT ice as the foundation, any recipe can be fabulous. Kold-Draft machines are engineered to give you 99.9% pure ice.

ICE IN ITS PUREST FORM



FULL ICE CUBE

Few brands have achieved iconic status in ice. Our machines produce the exclusive full cube. The only true square cube in the industry. It's larger and harder than all other ice.

1¼" x 1¼" x 1¼"

HALF ICE CUBE

Kold-Draft's half cube is exactly half the size of the full cube. The half cube provides excellent liquid displacement. The half cube is the right size cube for every purpose.

1¼" x 1¼" x ⅝"

KUBLET

Kold-Draft's kublet is exactly half the size of the half cube. The kublet is an all-purpose cube for usage in all types of beverages. It works perfectly with our AKD125 dispenser.

⅝" x ⅝" x 1¼"

KOLD-DRAFT

ice Machines • bins • crushers • dispensers



SHOWN WITH B950 BIN

Plumbing:

- 3/4" FPT potable water inlet
- 3/4" FPT bin drain
- 3/4" I.D. flex tubing cuber drain
- 3/8" FPT condenser (liquid-cooled) inlet
- 1/2" FPT condenser (liquid-cooled) outlet

Exterior Finish:

300 Series stainless steel

Refrigeration System:


Thermostatic expansion valve controlled R-404A-HFC

Clearance Requirements:

Allow 4" left side, 8" right side and back, and 6" top for ventilation and utility connections.

Condenser Heat Rejection:

BTUH/kW/Ton
13,850/4.06/1.15 avg.
18,000/5.3/1.5 peak

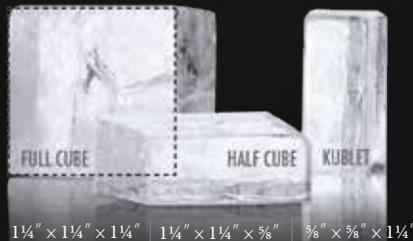

1 1/4" x 1 1/4" x 1 1/4" 1 1/4" x 1 1/4" x 3/8" 3/8" x 3/8" x 1 1/4"

GB1060/1070 – ICE MACHINE

THE WORKHORSE

The KOLD-DRAFT GB1060/1070 Workhorse Series produces up to 1,000 lbs. of ice per day. The GB1060/1070 is also stackable — allowing you to double the capacity in the same footprint.

Dimensions/Weight

Description	Dimensions / inches (cm)			Ship Weight
	W	D	H	
Air Cooled	42.3" (107.4cm)	31.1" (79cm)	33.7" (85cm)	348lb (158kg)
Liquid Cooled	42.3" (107.4cm)	25.7" (65.3cm)	33.7" (85cm)	312lb (142kg)
Remote Air Cooled	42.3" (107.4cm)	25.7" (65.3cm)	33.7" (85cm)	335lb (152kg)

Recommended Operating Requirements:

	MIN.	MAX.
Room Air Temp.	45°F (7°C)	110°F (43°C)
Water Temp.	45°F (7°C)	90°F (32°C)
Voltage 208-230	198V	253V
Potable Water Pressure	20 PSIG (137 kPa)	100 PSIG (689 kPa)
Liquid-Cooled Condenser Pressure	20 PSIG (137 kPa)	100 PSIG (689 kPa)

GB1060/1070 Series Daily Capacities: Lbs. of ice per 24 hours per unit

Model Number	Electrical Volt/Hz/Ph	Condenser	Cube Size	Ice Capacity 24 Hours lbs. (kg)		Energy Input 90°F/70°F kWh/100# (kJ/kg)	Tier	Water Use gal/100# (l/kg) 90°F/70°F		Min. Circuit Amp	Max. Fuse Size Amps	Required Condenser
				70°F/50°F Ambient/Water	90°F/70°F Ambient/Water			Potable	Condenser			
GB1064AC	208-230/60/1	Air Cooled	Full Cube	906 (411)	725 (329)	6.2 (492)	1	16.8 (1.4)	n/a	16.3	25	n/a
GB1064AHK			Half Cube	943 (428)	782 (355)	5.9 (466)	1	18.3 (1.5)		16.3	25	
GB1064AK			Kublet	1163(528)	1036 (470)	4.5 (354)	2	37.1 (3.1)		16.3	25	
GB1064LC		Liquid Cooled	Full Cube	952 (432)	835 (379)	4.5 (357)	1	16.6 (1.4)	142 (11.8)	15.4	25	n/a
GB1064LHK			Half Cube	1044 (473)	892 (405)	4.6 (361)	1	18.4 (1.5)	167 (13.9)	15.4	25	
GB1074RC		Remote Air Cooled	Full Cube	950 (431)	761 (345)	5.8 (459)	1	16.9 (1.4)	n/a	18.1	30	RC314APV
GB1074RHK			Half Cube	1022 (464)	831 (377)	5.4 (429)	1	18.9 (1.6)		18.1	30	
GB1074RK			Kublet	1009 (458)	807 (366)	5.4 (429)	1	37.5 (3.1)		18.1	30	

Use Model # GB1067AK, GB1067AHK, GB1067AC, GB1067LHK, GB1067LC, GB1077RK, GB1077RHK, GB1077RC to Indicate 220/50/1.

RC Condenser Series

Model Number	Description	Dimensions / inches (cm)			Gross Weight
		W	D	H	
RC314APV	Single-circuit vertical air flow remote condenser, vapor-charged with resealable quick-connect fittings, for GB1074R Cubers	40.75" (103.5cm) including interconnect fitting housing	22.75" (57.8cm)	30.2" (76.6cm) including 10" (25.4 cm) legs and fan guard	140lb (63.5kg)



Made in USA



Intertek



COMPONENT



COOL ENERGY SAVINGS



WARRANTY ON ALL PARTS & LABOR (EXCLUDES REINSTALLATION ONLY)

GB560 – ICE MACHINE

THE SIGNATURE

The KOLD-DRAFT GB560 produces up to 500 lbs. of ice per day. Stack it on another GB Series machine and increase the amount of ice harvested.

Dimensions/Weight				
Description	Dimensions / inches (cm)			Ship Weight
	W	D	H	
Air Cooled	42.3" (107.4cm)	31.1" (79cm)	17" (43.2cm)	207lb (94kg)
Liquid Cooled	42.3" (107.4cm)	25.63" (65.1cm)	17" (43.2cm)	185lb (84kg)
Remote	42.3" (107.4cm)	25.63" (65.1cm)	17" (43.2cm)	220lb (99.8kg)

Recommended Operating Requirements:

	MIN.	MAX.
Room Temp.	45°F (7°C)	110°F (43°C)
Water Temp.	45°F (7°C)	90°F (32°C)
Voltage 208-230	198V	253V
Voltage 115	104V	126V
Potable Water Pressure	20 PSIG (137 kPa)	100 PSIG (689 kPa)
Liquid-Cooled Condenser Pressure	20 PSIG (137 kPa)	100 PSIG (689 kPa)

GB560 Series Daily Capacities: Lbs. of ice per 24 hours per unit

Model Number	Electrical Volt/Hz/Ph	Condenser	Cube Size	Ice Capacity 24 Hours lbs. (kg)		Energy Input 90°F/70°F kWh/100# (kJ/kg)	Tier	Water Use gal/100# (l/lkg) 90°F/70°F		Min. Circuit Amp	Max. Fuse Size Amps	Required Condenser
				70°F/50°F Ambient/Water	90°F/70°F Ambient/Water			Potable	Condenser			
GB561AC	115/60/1	Air Cooled	Full Cube	446 (202)	365 (166)	7.1 (559)	I	16.4 (1.4)	n/a	18.6	30	n/a
GB561AHK			Half Cube	550 (249)	451 (205)	6.2 (488)	I	18.9 (1.6)		18.6	30	
GB561AK			Kublet	557 (253)	460 (209)	6.0 (480)	I	35.0 (2.9)		18.6	30	
GB561LC		Liquid Cooled	Full Cube	541 (245)	459 (208)	5.3 (422)	I	16.8 (1.4)	146 (12.2)	17.7	30	
GB561LHK			Half Cube	580 (263)	507 (230)	5.1 (403)	I	18.4 (1.5)	152 (12.6)	17.7	30	
GB564AC			Full Cube	443 (201)	380 (172)	6.9 (548)	I	16.9 (1.4)		9.5	15	
GB564AHK	208-230/60/1	Air Cooled	Half Cube	556 (252)	461 (209)	6.0 (480)	I	18.1 (1.5)	n/a	9.5	15	RC214APV
GB564AK			Kublet	550 (249)	460 (209)	6.0 (480)	I	35.5 (3.0)		9.5	15	
GB564LC			Full Cube	524 (238)	478 (217)	5.2 (415)	I	16.7 (1.4)	151 (12.6)	9.1	15	
GB564LHK		Liquid Cooled	Half Cube	596 (270)	499 (226)	4.8 (380)	I	17.5 (1.5)	154 (12.9)	9.1	15	
GB564RC			Full Cube	520 (236)	449 (209)	6.7 (532)	I	17.1 (1.4)		11.3	20	
GB564RHK		Remote Air Cooled	Half Cube	537 (244)	483 (219)	6.3 (500)	I	18.6 (1.6)	n/a	11.3	20	
GB564RK	Kublet		528 (239)	436 (198)	6.8 (540)	I	37.8 (3.2)		11.3	20		

Use Model # GB567AK, GB567AHK, GB567AC, GB567LHK, GB567LC to Indicate 220/50/1.

RC Condenser Series

Model Number	Description	Dimensions / inches (cm)			Gross Weight
		W	D	H	
RC214APV	Single-circuit vertical air flow remote condenser; vapor-charged with re-sealable quick-connect fittings for GB/GT564R Cubers	40.75" (103.5cm) including interconnect fitting housing	22.75" (57.8cm)	30.2" (76.6cm) including 10" (25.4cm) legs and fan guard	135lb (62.4kg)

KOLD-DRAFT

ice Machines • bins • crushers • dispensers



SHOWN WITH B650 BIN

Plumbing:

- 3/4" FPT potable water inlet
- 3/4" FPT bin drain
- 3/4" I.D. flex tubing cuber drain
- 3/8" FPT condenser (liquid-cooled) inlet
- 1/2" FPT condenser (liquid-cooled) outlet

Exterior Finish:

300 Series stainless steel

Refrigeration System:

Thermostatic expansion valve controlled R-404A-HFC

Clearance Requirements:

Allow 4" left side, 8" right side and back, and 6" top for ventilation and utility connections.

Condenser Heat Rejection:

BTUH/kW/Ton
6,500/1.91/0.54 avg
8,750/2.6/0.729 peak



1 1/4" x 1 1/4" x 1 1/4" 1 1/4" x 1 1/4" x 3/8" 3/8" x 5/8" x 1 1/4"



KOLD-DRAFT

ice Machines • bins • crushers • dispensers



SHOWN WITH B400 BIN

Plumbing:

- 3/4" FPT potable water inlet
- 3/4" FPT bin drain
- 3/4" I.D. flex tubing cuber drain
- 3/8" FPT condenser (liquid-cooled) inlet
- 1/2" FPT condenser (liquid-cooled) outlet

Exterior Finish:

300 Series stainless steel

Refrigeration System:

Thermostatic expansion valve controlled R-404A-HFC

Clearance Requirements:

Allow 4" left side, 8" right side and back, and 6" top for ventilation and utility connections.

Condenser Heat Rejection:

BTUH/kW/Ton
6,500/1.91/0.54 avg.
8,750/2.6/0.729 peak

GT560 – ICE MACHINE

THE CLASSIC

The KOLD-DRAFT GT560 produces up to 520 lbs. of our exclusive FULL cube, HALF cube, and KUBLET. Known for their shape, purity, hardness and slower melt rate, our ice lasts longer in storage bins, ice coolers, cocktail sinks, drinks, salad bars and bags.

Dimensions/Weight

Description	Dimensions / inches (cm)			Ship Weight
	W	D	H	
Air Cooled	30.1" (76.5cm)	25.7" (65.3cm)	30.7" (78cm)	228lb (103kg)
Liquid Cooled	30.1" (76.5cm)	25.7" (65.3cm)	30.7" (78cm)	218lb (99kg)
Remote	30.1" (76.5cm)	25.7" (65.3cm)	30.7" (78cm)	235lb (106.6kg)

Recommended Operating Requirements:

	MIN.	MAX.
Room Air Temp.	45°F (7°C)	110°F (43°C)
Water Temp.	45°F (7°C)	90°F (32°C)
Voltage 208-230	198V	253V
Voltage 115	104V	126V
Potable Water Pressure	20 PSIG (1.37 kPa)	100 PSIG (689 kPa)
Liquid-Cooled Condenser Pressure	20 PSIG (1.37 kPa)	100 PSIG (689 kPa)


GT560 Series Daily Capacities: Lbs. of ice per 24 hours per unit

Model Number	Electrical Volt/Hz/Ph	Condenser	Cube Size	Ice Capacity 24 Hours lbs. (kg)		Energy Input 90°F/70°F kWh/100# (kJ/kg)	Tier	Water Use gal/100# (l/kg) 90°F/70°F		Min. Circuit Amp	Max. Fuse Size Amps	Required Condenser
				70°F/50°F Ambient/Water	90°F/70°F Ambient/Water			Potable	Condenser			
GT561AC	115/60/1	Air Cooled	Full Cube	458 (208)	369 (167)	6.6 (526)	I	16.6 (1.4)	n/a	18.6	30	n/a
GT561AHK			Half Cube	575 (261)	453 (205)	6.2 (491)	I	19.4 (1.6)		18.6	30	
GT561AK			Kublet	558 (253)	461 (209)	6.0 (480)	I	36.0 (3.0)		18.6	30	
GT561LC	208-230/60/1	Liquid Cooled	Full Cube	510 (231)	447 (202)	5.2 (408)	I	17.1 (1.4)	137 (11.5)	17.7	30	n/a
GT561LHK			Half Cube	580 (263)	500 (227)	4.9 (384)	I	18.6 (1.6)	176 (14.6)	17.7	30	
GT564AC			Air Cooled	Full Cube	471 (214)	380 (172)	6.9 (545)	I	16.7 (1.4)	n/a	9.5	
GT564AHK	Half Cube	550 (249)		433 (196)	6.0 (475)	I	18.4 (1.5)		9.5	15		
GT564AK	Kublet	557 (253)		460 (209)	6.0 (480)	I	35.9 (3.0)		9.5	15		
GT564LC	208-230/60/1	Liquid Cooled	Full Cube	489 (222)	429 (194)	5.1 (407)	I	16.9 (1.4)	176 (14.6)	9.1	15	n/a
GT564LHK			Half Cube	573 (260)	494 (209)	4.7 (375)	I	17.9 (1.5)	144 (12.0)	9.1	15	
GT564RC			Full Cube	564 (256)	470 (213)	6.2 (491)	I	16.9 (1.4)		11.3	15	
GT564RHK	208-230/60/1	Remote Air Cooled	Half Cube	570 (259)	487 (221)	6.2 (491)	I	18.8 (1.6)	n/a	11.3	15	RC214APV
GT564RK			Kublet	528 (239)	436 (198)	6.8 (540)	I	37.8 (3.2)		11.3	15	

Use Model # GT567AK, GT567AHK, GT567AC, GT567LHK, GT567LC to Indicate 220/50/1.

RC Condenser Series

Model Number	Description	Dimensions / inches (cm)			Gross Weight
		W	D	H	
RC214APV	Single-circuit vertical air flow remote condenser; vapor-charged with resealable quick-connect fittings, for GB/GT564R Cubers	40.75" (103.5cm) including interconnect fitting housing	22.75" (57.8cm)	30.2" (76.6cm) including 10" (25.4 cm) legs and fan guard	135lb (61.24kg)

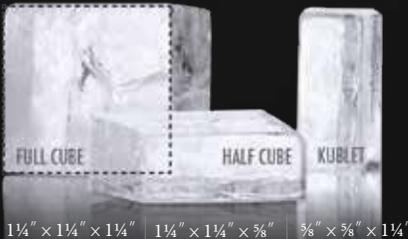

1 1/4" x 1 1/4" x 1 1/4" 1 1/4" x 1 1/4" x 3/8" 3/8" x 3/8" x 1 1/4"



Made in USA



Intertek



COMPONENT



GT360 – ICE MACHINE

THE IMPACT

Even if you don't need a ton of ice, you can still make a large impact with your customers. The KOLD-DRAFT GT360 produces up to 321 lbs. of our exclusive FULL cube, HALF cube and KUBLET ice.

Dimensions/Weight				
Description	Dimensions / inches (cm)			Ship Weight
	W	D	H	
Air Cooled	30.1" (76.5cm)	25.7" (65.3cm)	16.9" (42.9cm)	180lb (82kg)
Liquid Cooled	30.1" (76.5cm)	25.7" (65.3cm)	16.9" (42.9cm)	174lb (79kg)

Recommended Operating Requirements:

	MIN.	MAX.
Room Air Temp.	45°F (7°C)	110°F (43°C)
Water Temp.	45°F (7°C)	90°F (32°C)
Voltage 208-230	198V	253V
Voltage 115	104V	126V
Potable Water Pressure	20 PSIG (137 kPa)	100 PSIG (689 kPa)
Liquid-Cooled Condenser Pressure	20 PSIG (137 kPa)	100 PSIG (689 kPa)

KOLD-DRAFT

ice Machines • bins • crushers • dispensers



SHOWN WITH B400 BIN

GT360 Series Daily Capacities: Lbs. of ice per 24 hours per unit

Model Number	Electrical Volt/Hz/Ph	Condenser	Cube Size	Ice Capacity 24 Hours lbs. (kg)		Energy Input 90°F/70°F kWh/100# (kJ/kg)	Tier	Water Use gal/100# (l/kg) 90°F/70°F		Min. Circuit Amp	Max. Fuse Size Amps	Required Condenser
				70°F/50°F Ambient/Water	90°F/70°F Ambient/Water			Potable	Condenser			
GT361AC	115/60/1	Air Cooled	Full Cube	270 (122)	216 (98)	8.0 (631)	1	22.0 (1.8)	n/a	12.0	15	n/a
GT361AHK			Half Cube	332 (151)	255 (116)	7.3 (581)	1	23.6 (2.0)		12.0	15	
GT361AK			Kublet	328 (149)	269 (122)	7.7 (614)	1	40.0 (3.4)		12.0	15	
GT361LC		Liquid Cooled	Full Cube	309 (140)	262 (119)	5.6 (441)	2	22.2 (1.9)	165 (13.8)	11.1	15	
GT361LHK			Half Cube	373 (169)	316 (143)	5.2 (411)	2	22.9 (1.9)	181 (15.1)	11.1	15	
GT361LK			Kublet	362 (164)	305 (138)	5.8 (460)	1	37.3 (3.1)	135 (11.4)	11.1	15	
GT364AC	208-230/60/1	Air Cooled	Full Cube	269 (122)	215 (97)	7.6 (601)	2	22.1 (1.8)	n/a	6.5	15	
GT364AHK			Half Cube	332 (151)	255 (116)	6.9 (548)	2	23.6 (2.0)		6.5	15	
GT364AK			Kublet	334 (151)	269 (122)	7.7 (614)	1	40.0 (3.4)		6.5	15	
GT364LC		Liquid Cooled	Full Cube	301 (137)	255 (115)	5.8 (460)	1	22.0 (1.8)	163 (13.6)	6.0	15	
GT364LHK			Half Cube	358 (162)	303 (137)	5.3 (424)	2	23.2 (1.9)	189 (15.7)	6.0	15	
GT364LK			Kublet	369 (167)	305 (138)	5.8 (460)	1	37.3 (3.1)	135 (11.4)	6.0	15	

Use Model # GT367AK, GT367AHK, GT367AC, GT367LK, GT367LHK, GT367LC to Indicate 220/50/1.

Plumbing:

- 3/4" FPT potable water inlet
- 3/4" FPT bin drain
- 3/4" I.D. flex tubing cuber drain
- 3/8" FPT condenser (liquid-cooled) inlet
- 1/2" FPT condenser (liquid-cooled) outlet

Exterior Finish:

300 Series stainless steel

Refrigeration System:


Thermostatic expansion valve controlled R-404A-HFC

Clearance Requirements:

Allow 4" left side, 8" right side and back, and 6" top for ventilation and utility connections.

Condenser Heat Rejection:

BTUH/kW/Ton
4,700/1.38/0.39 avg.
5,850/1.71/0.49 peak

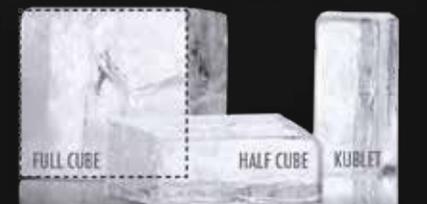

1 1/4" x 1 1/4" x 1 1/4" 1 1/4" x 1 1/4" x 3/8" 3/8" x 5/8" x 1 1/4"



IT'S NICE TO BE NOTICED™

KOLD-DRAFT

ice Machines • bins • crushers • dispensers



SHOWN WITH GB560 SERIES ICE MACHINE AND B650D BIN

Exterior Finish:

Stainless steel cabinet, crusher mechanism, and hopper for cleanliness, corrosion resistance, and long life.

Clearance Requirements:

Please see ice machine recommendations.

Crusher mechanism has ball bearings for durability.

Dual voltage, 50/60 Hz. motor.
1/3 HP capacitor start energy saver motor.

Provides for crushed and cubed ice when used with a divided bin.

Safety interlock provided to prevent operation of crusher when panels are removed.

T280 SERIES – ICE CRUSHER

THE BIG CRUSH

KOLD-DRAFT crushed ice is superior to flaked ice. Our T280 crushed ice is made from harder, denser cubes, so it lasts longer and melts slower than flaked ice.

Dimensions/Weight

Description	Dimensions / inches (cm)			Ship Weight
	W	D	H	
T280	42.3" (107.4cm)	25.5" (64.7cm)	15.5" (39.4cm)	144lb (65kg)

General Specifications for T261/T264 and T271/T274

Model Number	Voltage (V/Hz/PH)	Number of Wires	Min. Circuit Ampacity ¹	Max. Fuse Size	Operating Range	Use with Models
*T281	115/50-60/1	2	7.2	15	104-126V	GB561
*T284	208-230/50-60/1	2	4.1	15	198-253V	GB564/GB1064

*Models are for GB560 and GB1060 Series Energy Efficient Models.

We reserve the right to make product improvements at any time. Specifications and design are subject to change without notice.

Note: Always disconnect power before cleaning or servicing equipment.

Automatic motor operation when used with **KOLD-DRAFT GB Series Ice Machines.**

Pre-wired to operate with either one or two **KOLD-DRAFT GB Series Ice Machines.**



1 1/4" x 1 1/4" x 1 1/4" | 1 1/4" x 1 1/4" x 3/8" | 3/8" x 3/8" x 1 1/4"



AKD125 – ICE CUBE DISPENSER

ON DEMAND

Where on-demand ice and water are needed, the KOLD-DRAFT AKD125 Automatic Ice Cube is the solution. The AKD125 features one-hand, pushbutton dispensing for ease of operation when filling containers and ice buckets.

Dimensions/Weight				
Description	Dimensions / inches (cm)			Ship Weight
	W	D	H	
AKD125	30.125" (76.5cm)	25.25" (64.1cm)	44.5" (113cm)	169lb (77kg)

General Specifications for AKD125 Dispenser					
Model Number	Rated Storage Capacity	Voltage Characteristics	Number of Wires Plus Ground	FLA	HP
AKD125	125lb (56.7kg)	115-60-1	2	1.9	1/12

KOLD-DRAFT

Ice Machines • bins • crushers • dispensers



SHOWN WITH GT360 SERIES ICE MACHINE

Plumbing:

Two 3/4" I.D. flex tubing or drains. Bin drain is isolated for sanitation.

Exterior Finish:

300 Series stainless steel.

Interior Finish:

Rotationally molded polyethylene.

Motor:

PSC type with automatic thermal overload.

Insulation:

Polyurethane foam

Clearance Requirements:

Allow 4" left side, 4" right side and back, and 1" top for ventilation and utility connections.

Loading:

Installation must include KOLD-DRAFT Classic GT Series Ice Cuber.

Mechanism:

Motor-driven auger.

Spout:

Universally sized for glass filling and bucket filling.

Operation:

Dispensing is continuous when push-button is held.



KOLD-DRAFT®

ice Machines • bins • crushers • dispensers

SC200 SERIES – SELF CONTAINED ICE MACHINE

THE KOLD-DRAFT SC200

The KOLD-DRAFT SC200 produces up to 200 lbs. of full cube ice per day. The SC200 is ideal for any undercounter or bar application. The front breathing inlet and discharge allows for installation in tight spaces.



SC200 SERIES
SELF CONTAINED
ICE MACHINE

Dimensions/Weight

	Dimensions / inches (cm)			Ship Weight
	W	D	H	
Air Cooled (without legs)	26" (66cm)	28.6" (72.6cm)	31.4" (79.8cm)	207lb (94kg)
With Legs	26" (66cm)	28.6" (72.6cm)	37.4" (100cm)	207lb (94kg)

Recommended Operating Requirements:

	MIN.	MAX.
Room Temp.	45°F (7°C)	90°F (32°C)
Water Temp.	45°F (7°C)	90°F (32°C)
Voltage 220-240	210	250
Voltage 115	104	126
Potable Water Pressure	5 PSIG (0.034 MPA)	100 PSIG (0.6 MPA)

Features:

- Produces up to 200 lbs. of full cube ice per day.
- Ideal for any undercounter or bar application.
- Front breathing inlet and discharge allows installation in tight spaces.
- Front access to ice. Door lifts up or slides in, so it's out of the way.
- Electroless nickel plated evaporator.
- Corrosion-resistant stainless steel exterior with plastic door and bin liner.
- Stores 100 lbs. of ice.

Plumbing:

- 1/2" FIP potable water inlet
- 3/4" FIP ice bin drain
- 1/2" FIP ice maker drain
- .88" Diameter electrical connection

Exterior Finish:

Corrosion-resistant stainless steel exterior with plastic door and bin liner

SC200 Series Daily Capacities: Lbs. of ice per 24 hours per unit

Model Number	Electrical Volt/Hz/Ph	Condenser	Cube Size	Ice Capacity 24 Hours lbs. (kg)		Energy Input 90°F/70°F kWh/100# (kJ/kg)	Tier	Water Use gal/100# (l/kg) 90°F/70°F		Min. Circuit Amp	Max. Fuse Size Amps
				70°F (21°C) / 50°F (10°C) Ambient/Water	90°F (32°C) / 70°F (21°C) Ambient/Water			Potable	Condenser		
SC201	115/60/1	Air Cooled	Full Cube	150 (68.04)	119 (53.98)	8.71 (691.28)	I	29.56 (2.47)	n/a	6	15
SC207	220-240/50/1	Air Cooled	Full Cube	149 (67.59)	118 (53.52)	8.25 (654.77)	I	29.34 (2.45)	n/a	3	15



1 1/4" x 1 1/4" x 1 1/4" | 1 1/4" x 1 1/4" x 3/8" | 3/8" x 3/8" x 1 1/4"



ICE BINS

KOLD-DRAFT

ice Machines • bins • crushers • dispensers

Features:

- Stainless Steel exterior.
- Rigid stainless steel lift doors withstand heavy use.
- A gasket seals the door opening to reduce ice meltage.
- Non-corroding polyethylene lined walls eliminate pitting and staining.
- Easy cleaning.
- Non-CFC polyurethane foam insulation bonds the shell and linin.
- Extra-large door openings provide maximum access for ice removal and bin cleaning.
- Low door sills allow users to easily reach ice at the bottom of the bin.



KDB230
• Match with the GT360 Series



KDB400
• Match with the GT360 or GT560 Series




KDB650
• Match with the GB560 or GB1060 Series
• Storage capacity 660 lbs / 299 kg



B950
• Match with the GB1060 or GB560 Series
• Storage capacity 950 lbs / 431 kg

General Specifications for KDB230/KDB400/KDB650/KDB950

Model	Dimensions / inches (cm)			Ice Capacity lb (kg)	Weight lb (kg)	Water Consumption (gal/100lb ice)
	W	D	H			
KDB230	30.25" (76.8cm)	34" (86.4cm)	23" (58.4cm)	230lb (104kg)	112lb (51kg)	N/A
KDB400	30.25" (76.8cm)	31.25" (79.4cm)	37" (94cm)	400lb (181kg)	163lb (74kg)	N/A
KDB650	42" (106.6cm) (with 6" legs)	35" (88.9cm)	41" (104.1cm)	660lb (181kg)	182lb (82.5kg)	N/A
B950	48" (121.9cm) (with 6" legs)	31.5" (80cm)	50" (127cm)	950lb (431kg)	231lb (105kg)	N/A

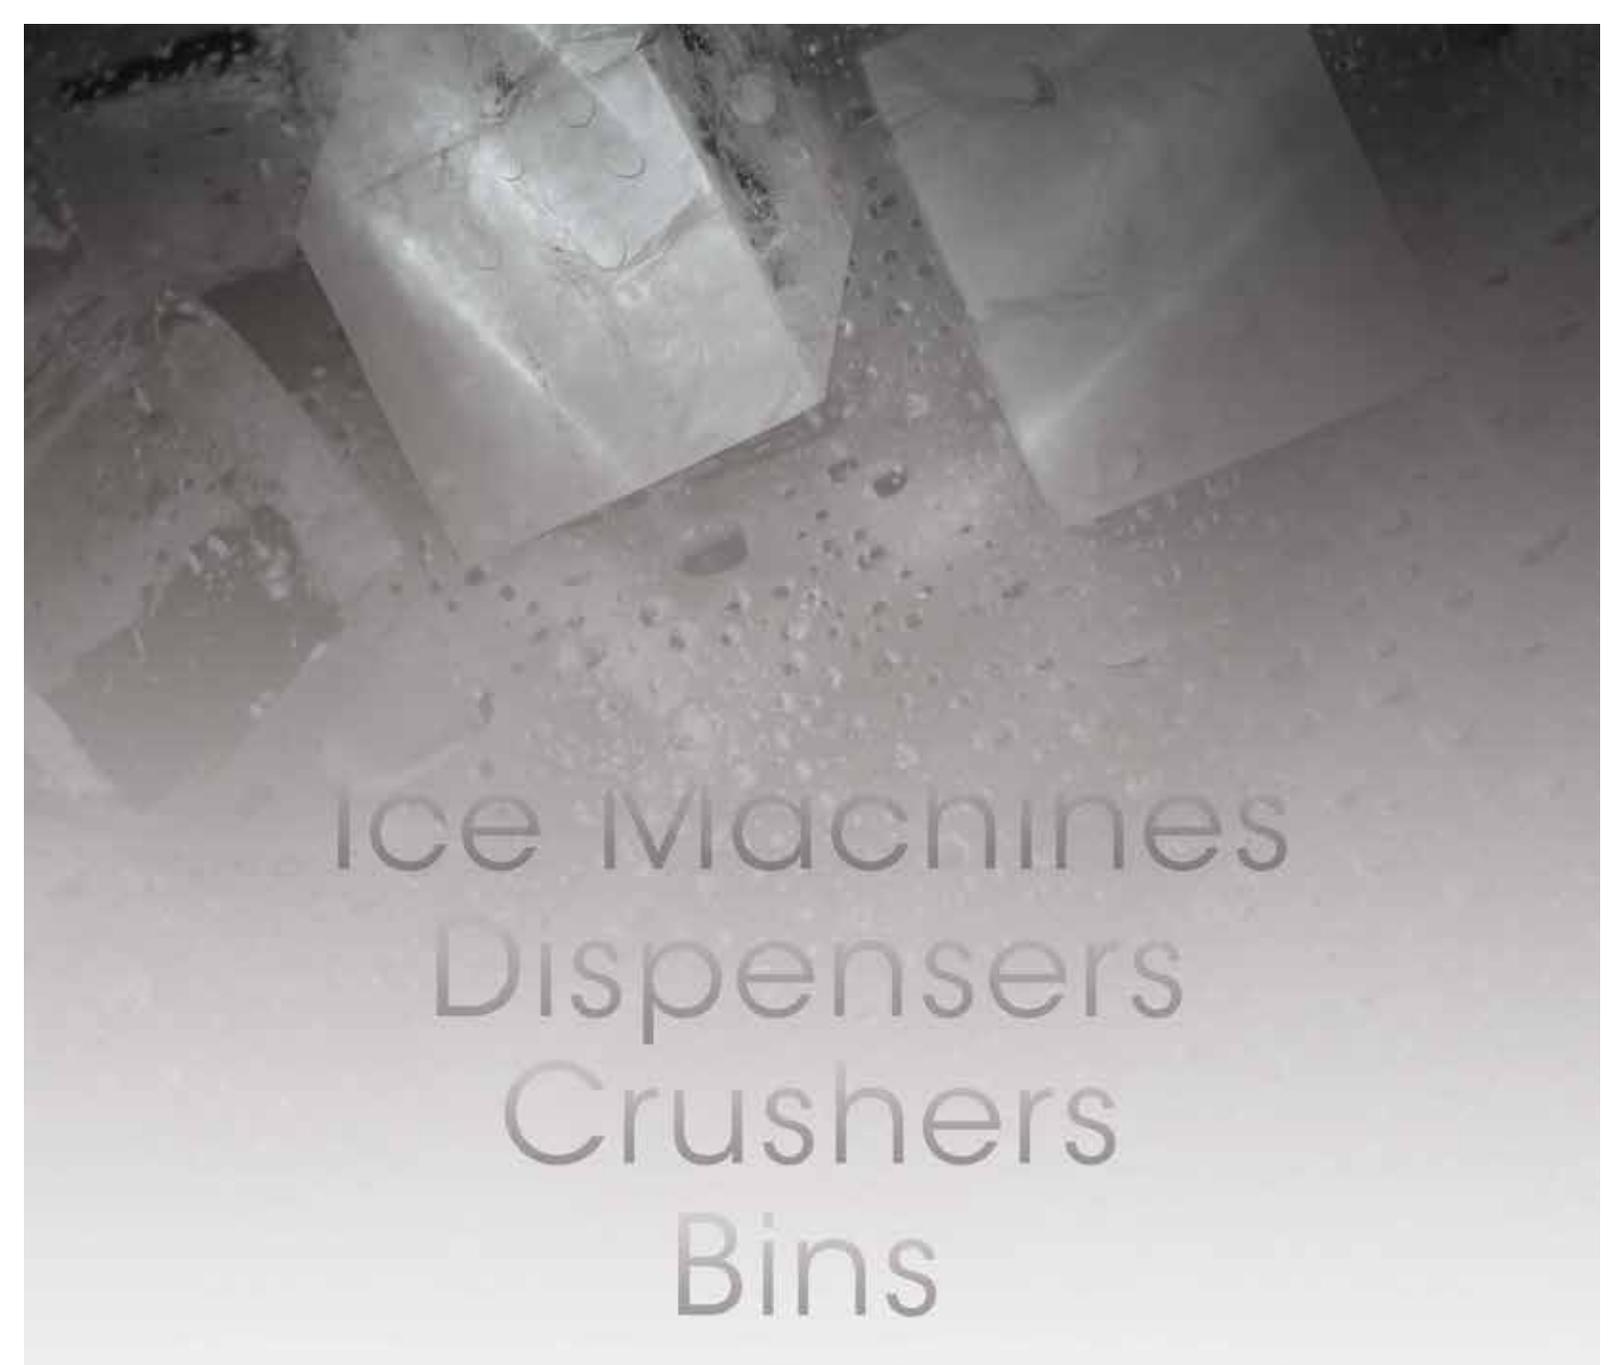

Ice Machines
Dispensers
Crushers
Bins

