




TS PERFORMANCE
WE ARE DIESEL

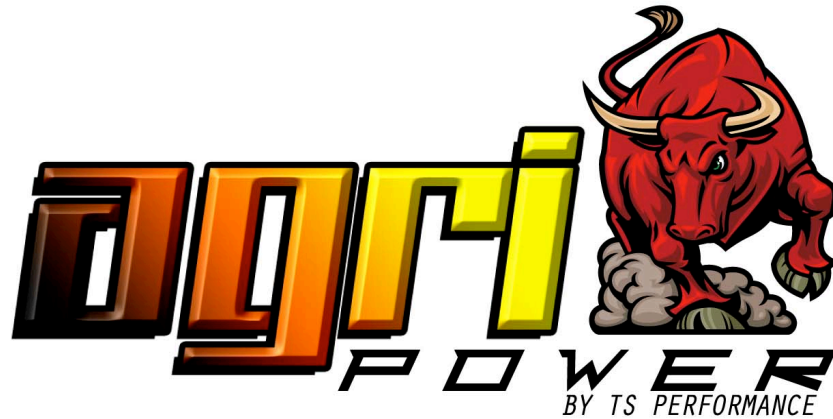

Thank you for buying the Agri-Power MP-8 for John Deere 10.5L and 12.5L. Here you will learn how to install this MP-8 into your truck, and we guarantee that you will be satisfied with our product. Before you get started check to make sure that you have everything below in the contents that came in the box

4110104

John Deere Agri-Power

Installation Manual

Contents:

Module
Zip Ties (4)

Harness (TSP04JD)

- HP increase of 50hp.
- Decrease Fuel Consumption by up to 10%
- When removed leaves no trace of modification or foot prints

Continued

Installation of the TS Performance John Deere Agri-Power module.

Read all instructions and fully understand them before installing you TS Performance John Deere Agri-power module. Disconnect the battery terminals and remove keys from ignition before installation.

Place Di-Electric Grease onto every electrical connection.

Instructions for installation of early model dual rail 9200,9300, 9400 tractors.

1. Locate the two wire sensor at the back of the engine head.
2. Unplug the connector from the sensor; plug the connector from the John Deere harness in to the sensor.
3. Now plug the factory sensor in to the left over connector.
4. The John Deere comes with two 1/4" zip ties to mount the box in a dry cool location.
5. Route the cables away from any moving parts or places that might damage the cable with the 4" zip ties supplied.

Instructions for installation of late model single rail 9220,9320, 9420, and 9620 tractors.

1. Find the two wire sensor located on the front-left of engine block behind the fuel filter.
2. Unplug the connector from the sensor; plug the connector from the John Deere harness in to the sensor.
3. Now plug the factory sensor in to the left over connector.
4. The John Deere comes with two 1/4" zip ties to mount the box in a dry cool location.
5. Route the cables away from any moving parts or places that might damage the cable with the 4" zip ties supplied.

DO NOT unplug the MP-8 Module while the engine is running. This may result in engine or component failure and may void warranty on the engine or MP-8.



If there are any questions on the product or installation of the module give us a call at TS Performance
(270) 746-9999

Continued



TS Performance
851 Lovers Ln
Bowling Green, KY 42103
270-746-9999
www.tsperformance.com

DISCLAIMER

READ CAREFULLY BEFORE INSTALLING ANY TS PERFORMANCE PRODUCT

REMEMBER THIS IS A HIGH PERFORMANCE PRODUCT. USE AT YOUR OWN RISK. FOR OFF ROAD USE ONLY.

Do not use this product until you have carefully read the following agreement. This agreement sets forth the terms and conditions for the use of the TS Performance product. The installation of this product indicates that the buyer has read and fully understands this agreement and accepts its terms and conditions.

DISCLAIMER OF LIABILITY

TS Performance, its distributors or dealers shall in no way be responsible for the product's proper use and service. The buyer of this system hereby waives all liability claims. The buyer acknowledges that he is not relying on the seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the buyer hereby waives all remedies or liabilities, expressed or implied arising by law or otherwise, (including without obligations of the seller with respect to fitness, merchantability and consequential damages) or whether or not occasioned by the seller's negligence.

The seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the buyer agrees to indemnify the seller and to hold the seller harmless from any claim related to the item of the equipment purchased. Under no circumstances will the seller be liable for any damages or expenses by reason of use or sales of any such equipment.

The seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt the manufacturer is to be contacted.

LIMITED LIFETIME WARRANTY

STATEMENT POLICY

- The warranty policy is the best warranty within the high performance diesel industry.
- All **TS Performance** products have been inspected, tested and trial in the factory laboratories and on the field.
- Nothing in this Statement of Policy shall alter or enlarge the terms of warranties, obligation or liabilities of these products.
- **TS Performance** is not responsible or liable for any products damaged or destroyed due to improper installation.

TERMS OF WARRANTY

- The defective product must be freight prepaid and returned to **TS Performance** for further investigation, otherwise this warranty shall be deemed null and voided and of no effect.
- This warranty is void on any products that show evidence of misapplication, negligence, improper installation, and abuse, lack of proper maintenance or alternation from its original design.
- In no event will **TS Performance** be liable for any consequential or incidental damages for breach of any express or implied warranty on the product.
- This warranty is not transferable or assignable.
- **TS Performance** is not responsible or liable for any products damaged or destroyed due to improper installation.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT IN A NEW ANDN UNUSED CONDITION WITH A DATED PROOF OF PURCHASE TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTATNDNS THIS AGREEMENT AND ACCEPTST ITS TERMS AND CONDITITONS.

Continued

TS PERFORMANCE
Products and Other Info found on the
WWW.TSPERFORMANCE.COM

FOR TECHNICAL SUPPORT
(270) 746-9999



WE ARE DIESEL