



# ADDRESSING YOUR CONTROL NEEDS AROUND THE GLOBE

- Products
- Technology
- Services
- Global

Address: 260 Quigley Blvd., Suite 135, New Castle, DE19720  
Phone: 302.250.4990  
Website: [GatewayIntl360.com](http://GatewayIntl360.com)




## PRODUCTS:

- [WIRE-IN THERMAL TYPE PHOTOCONTROL](#)
- [STANDARD PHOTOCONTROL](#)
- [CAPS AND DIMMING PHOTOCONTROLS](#)
- [GW360 INTELLIGENT LIGHTING SOLUTIONS](#)
- [RECEPTACLES](#)

Address: 260 Quigley Blvd., Suite 135, New Castle, DE19720  
Phone: 302.250.4990  
Website: [GatewayIntl360.com](http://GatewayIntl360.com)



## Wire-In Thermal Type Photocontrol | FAMILY TREE

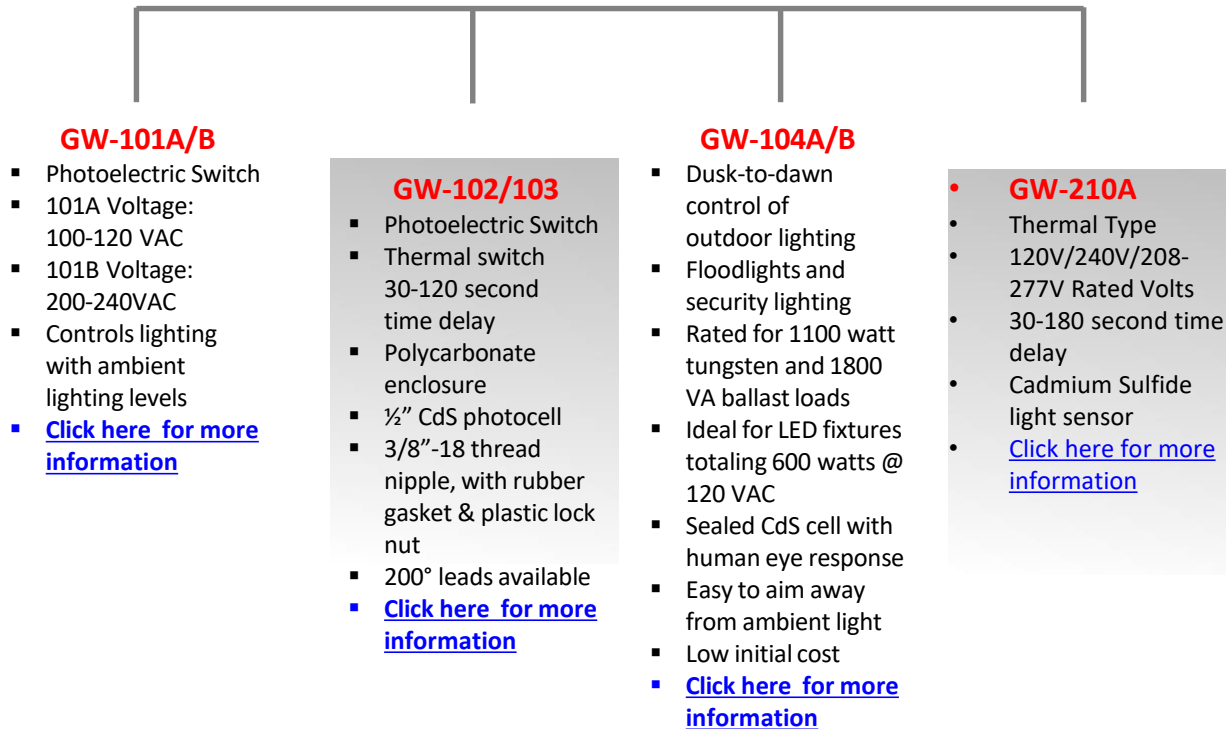



## Wire-In Thermal Type Photocontrol | FAMILY TREE

### GW-403C

- Photoelectric Switch
- Wide input voltage: 120-277 VAC
- Sealed light sensor
- Instant turn-on and 5-10 second turn-off time delay
- UL Listed
- [Click here for more information](#)

### GW-405C

- Photoelectric Switch
- Wide input voltage: 120-277VAC
- Controls lighting with ambient lighting levels
- Instant turn-on and 3-10 second turn-off time delay
- UL Listed
- [Click here for more information](#)


### GW-423C

- Photoelectric Switch
- Wide input voltage: 120-277VAC
- Controls lighting with ambient lighting levels
- Instant turn-on and 5-10 second turn-off time delay
- [Click here for more information](#)





## STANDARD PHOTOCONTROLS | FAMILY TREE

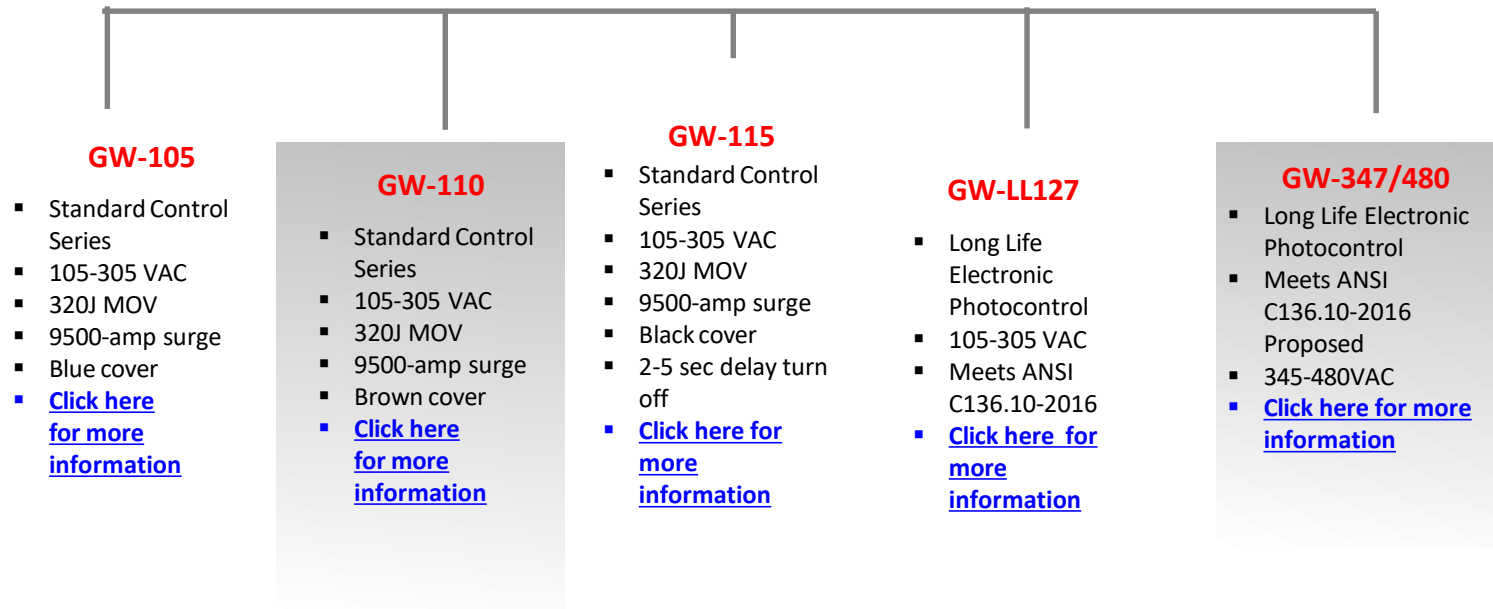



## STANDARD PHOTOCONTROLS | FAMILY TREE

### GW-202

- Thermal Switch Photocontrol
- 310-380 VAC
- [Click here for more information](#)

### GW-226

- UK standard product
- Microprocessor/program based photo-electronic control
- IR-filtered Phototransistor
- Midnight Turn Off
- GW-226 is rated 105-305VAC
- [Click here for more information](#)



## CAPS

### GW-208

- Shorting Cap
- Various Colors
- 0-480V
- [Click here for more information](#)

### GW-209

- Open Cap
- 0-480V
- [Click here for more information](#)

## DIMMING PHOTOCONTROLS

### On/Off

#### GW-241-242-243

- ANSI C136.41-2013 Twist Lock
- 105-305 VAC
- IP65 Ready / IP67 Optional
- Constant On/Off Dimming
- Midnight Dimming
- LED Decay Compensation
- Optional Metal Armor for Longer Life
- [Click here for more information](#)

### 0-10 V Dimming

#### GW-244

- 40kA Surge Arrester Built-in
- IR filtered Photodiode Sensor
- Midnight Dimming
- LED Decay Compensation Featured
- Fail-On Mode. Fail-Off available
- Smart Phone Remote Control (Bluetooth/ZigBee®)
- [Click here for more information](#)



# GW360 Intelligent Nodes [Intelligent Lighting Solution]

## GW-150-GPS-PR

- Wide input voltage: 105-305VAC
- Security: AES128 encryption.
- Built-in GPS.
- Dimming by time schedule or ambient light.
- ZigBee® communication, auto-Mesh
- Standard NEMA 5-pin interface for easy installation
- [Click here for more information](#)

## GW-150-GPS-SMT

- Wide input voltage: 105-305VAC
- Security: AES128 encryption.
- Built-in GPS.
- Dimming by time schedule or ambient light with a SMT phototransistor.
- ZigBee® communication, auto-Mesh
- Standard NEMA 5-pin interface for easy installation
- [Click here for more information](#)

## GW-180

- Cellular Intelligent Communication Wireless Node
- Built-in GPS.
- Built-in WIFI System
- Built-in Camera Interface
- Built-in Emergency Alarm System
- Built-in Motion Sensor Interface
- Built-in Gun Shot Interface
- Built-in Electricity Leak Detection System
- Built-in Water Depth Detection Interface
- NEMA 7-pin interface
- [Click here for more information](#)

Address: 260 Quigley Blvd., Suite 135, New Castle, DE 19720

Phone: 302.250.4990

Website: [GatewayIntl360.com](http://GatewayIntl360.com)





## RECEPTACLES | FAMILY TREE

### GW-210/210K

- BS 5972:1980/ANSI C136.10-1996
- 360° field rotation
- Wall mount
- 0-240V, 10amp MAX
- [Click here for more information](#)

### GW-220

- Compact Receptacle for Luminaires
- UL773/ANSI C136.10 1996
- 360° field rotation
- Small size, low cost
- [Click here for more information](#)

### GW-230

- Receptacle Luminaires assembly
- UL773/ANSI C136.10-1996
- 360° field rotation
- 3 Pin
- Mounting Ring
- [Click here for more information](#)

### GW-605/605R


- Twist-Lock Photocontrol Receptacle
- Conforms ANSI C136.41
- Available in 3, 5 & 7 Pin
- [Click here for more information](#)

### GW-635

- Twist-Lock Photocontrol Receptacle
- ANSI C136.41
- 360 field rotation
- Available in 3, 5 & 7 Pin
- [Click here for more information](#)



## RECEPTACLES | FAMILY TREE



### **GW-615**

- Twist-Lock Photocontrol Receptacle
- Conforms ANSI C136.41
- Available in 3, 5 & 7 Pin
- [Click here for more information](#)

### **GW-625/625R**

- Wide input voltage: 105-480V
- Silicone Gasket
- UL listed
- Bakelite housing
- Complies with ANSI C136.10
- [Click here for more information](#)