



www.JOSAM.com

NON-FREEZE & MILD CLIMATE WALL HYDRANT



The Josam 71300 and 71350 series non-freeze and mild climate wall hydrant is the first 100% POTABLE WATER SOURCE wall hydrant available on the market. The Josam 71300 and 71350 series wall hydrants have been tested and are in compliance with NSF/ANSI 61, NSF/ANSI 372, ASSE 1019, A112.18.1 & AB 1953

Standard Features:

- Mild Climate Model Available
- 4" – 14" Wall Thickness
- Chrome Plated Finish (Hydrant)
- Stainless Steel Box Standard on 71350 Series
- ¼ Turn Key Allows Full Flow to be Obtained
- ¾" H.P.T. Outlet
- Ceramic Disc
- Integral Vacuum Breaker/Backflow Preventer
- ¾" Male and ½" Female N.P.T. Inlet Connection



Stainless Steel
(Standard)



S.F. Bronze Face
(-52)



S.F. Nikaloy Face
(-54)

JOSAM HYDRANT 1/4 TURN WITH BOX - SERIES 71300

SPECIFICATION: JOSAM SERIES 71300 CHROME-PLATED HYDRANT/SILL-COCK, STAINLESS STEEL BOX, HINGED LATCHING COVER, 3/4" HPT OUTLET, INTEGRAL BACK FLOW PREVENTER, AND 1/2" OR 3/4" INLET CONNECTION.

HYDRANT APPROVED TO NSF/ANSI 61 FOR USE IN POTABLE WATER SYSTEMS.


RECOMMENDED MIN. WALL OPENING: 5-1/2" X 7-3/4"

| MODEL | A |
|--------------|--------------|
| 71300-6-QTR | 6-1/4 [159] |
| 71300-7-QTR | 7-1/4 [184] |
| 71300-9-QTR | 9-1/4 [235] |
| 71300-11-QTR | 11-1/4 [286] |
| 71300-13-QTR | 13-1/4 [337] |
| 71300-15-QTR | 15-1/4 [387] |
| 71300-17-QTR | 17-1/4 [438] |

OPTIONS:

| | |
|-----|--------------------------------|
| -52 | CAST SATIN FINISH BR FACE |
| -54 | CAST SATIN FINISH NIKALOY FACE |
| -72 | WALL CLAMP |
| -81 | HOSE BIBB VACUUM BREAKER |
| -91 | 1" HOSE PIPE THREADED OUTLET |
| -95 | CYLINDER SECURED LOCK |


-81 AND -91 CANNOT BE ORDERED TOGETHER

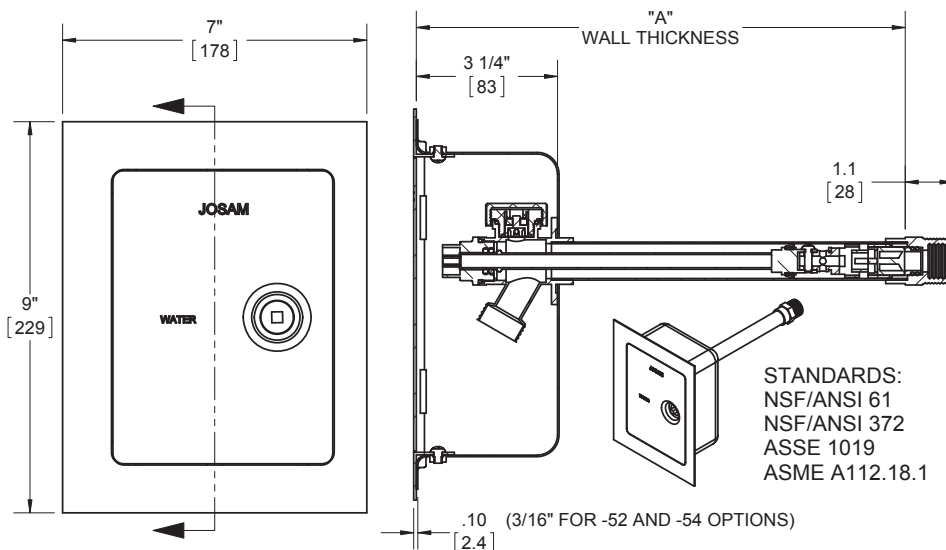

JOSAM HYDRANT 1/4 TURN - SERIES 71350

SPECIFICATION: JOSAM SERIES 71350 CHROME-PLATED HYDRANT/SILL-COCK, 3/4" HPT OUTLET, INTEGRAL BACK FLOW PREVENTER, AND 1/2" OR 3/4" INLET CONNECTION.

APPROVED TO NSF/ANSI 61 FOR USE IN POTABLE WATER SYSTEMS.

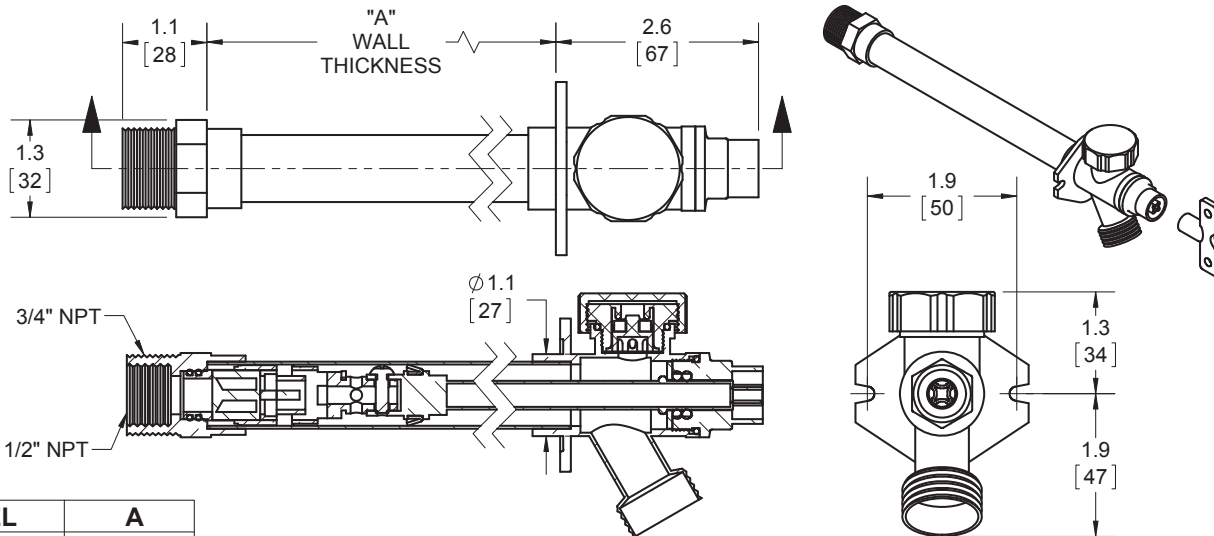

| MODEL | A |
|--------------|----------|
| 71350-MC-QTR | 3 [76] |
| 71350-4-QTR | 4 [102] |
| 71350-6-QTR | 6 [152] |
| 71350-8-QTR | 8 [203] |
| 71350-10-QTR | 10 [254] |
| 71350-12-QTR | 12 [305] |
| 71350-14-QTR | 14 [356] |

OPTIONS:

| | |
|-----|------------------------------|
| -72 | WALL CLAMP |
| -81 | HOSE BIBB VACUUM BREAKER |
| -91 | 1" HOSE PIPE THREADED OUTLET |

STANDARDS:

NSF/ANSI 61
NSF/ANSI 372
ASSE 1019
ASME A112.18.1

DATE OF LAST CHANGE: 10/30/14

DIMENSIONS ARE SUBJECT TO MANUFACTURER'S TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.