



# MEDICAL GRADE TOUCH MONITORS

---

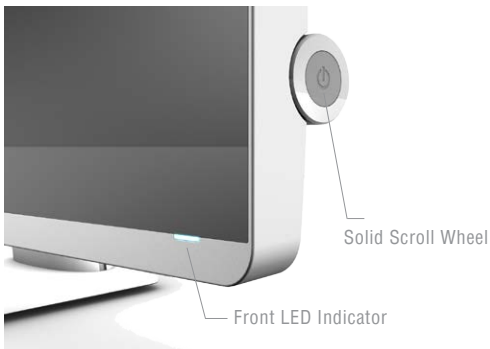

[ WHITE ]

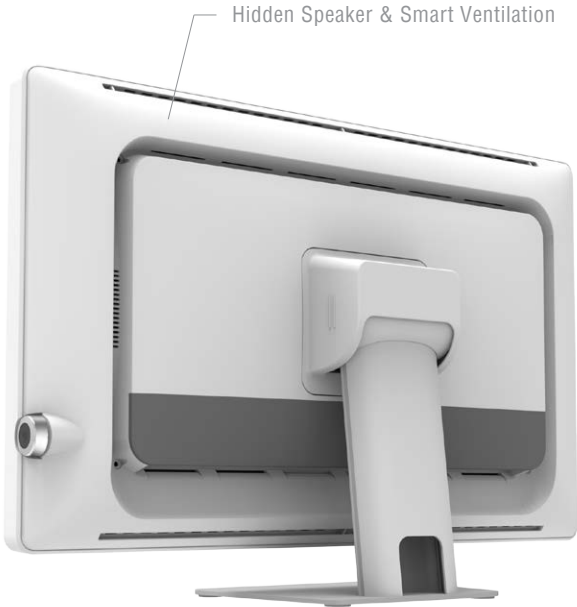

[ BLACK ]

---

ID Type		True Flat(P-Cap)		
Panel Spec	Type	HVA		
	Resolution	1920 (H) x 1080 (V)		
	Screen Size (inch)	23.8		
	Display Area (mm)	527.04(H) x 296.24(V)		
	Pixel Pitch (mm)	0.274 (H) x 0.274 (V)		
	Viewing Angle (degree)	178 (H)/ 178 (V)		
	Response Time (ms)	14 (GtG)		
	Brightness (cd/m <sup>2</sup> )	250 (Typ.)		
	Contrast Ratio	1000:1 (Typ.)		
	Color Depth (bits)	6 +FRC		
I/O Interface	DVI	DVI-D x1	HDMI	N/A
	DP	DP1.2 x1	Audio	3.5mm
	VGA	D-Sub15 x1		
Touch	Type	P-Cap		
	Touch Point	10		
	Screen Printing	Black		
	Glass Coating	AG		
	Interface	Combo(USB/RS232)		
Features	Color Temperature	Neutral/Warm/Cool/User	OSD Languages	English/ Spanish/ French / German/ Italian/ Japanese
	Gamma Selection	Neutral/2.2/DICOM	Speaker	2W Speaker
	Gamma LUT (bits)	12	Scaling Mode	Full/5:4/4:3/16:9/1:1
Power Requirements	Power Supply	DC 24V		
	Power Consumption (W)	40(Max)		
Physical Characteristics	Dimensions (WxHxD) (mm)	581(W) x400(H) x175(D)(with Stand) 581(W) x360(H) x69(D)(w/o Stand)		
	VESA Mounting (mm)	100 x100		
	Weight (Kg)	9.5 (with Stand) 7.7 (w/o Stand)		
	ID Color	White/ Black		
	IP Rating (Front)	IP65		
	IP Rating (Back Cover)	IPx1		
	Tilt Range (degree)	0~+30	Swivel Range (degree)	N/A
	Pivot Range (degree)	N/A	Height Adjustment (mm)	N/A
Reliability	Operating Temperature ( - C )	10 to 40	Storage Temperature ( - C )	-20 to 60
	Operating Humidity (RH)	30% to 75%	Storage Humidity (RH)	10% to 90%
Certifications and Compliances		cTUVus(60601 Ed3.1),CB(60601 Ed3.1),CE,FCC-B		

