


TACT SWITCH

2.8*1.95 Side Push Type
Mid-mount Switch

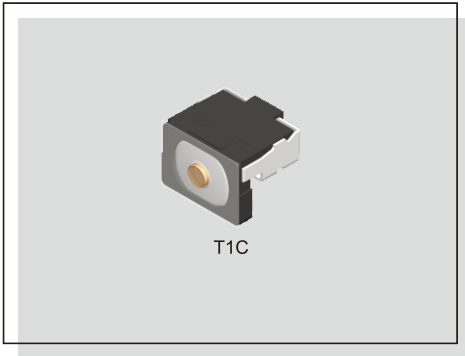

T1C

FEATURES

- ※Miniature 2.8*1.95mm
- ※Side push mid-mount type
- ※300,000 operation life cycles
- ※Better soldering peeling strength
- ※Height from surface of PCB:0.975mm

APPLICATION


- ※Smart phone
- ※Medical
- ※Portable electronic device
- ※3C products

SPECIFICATION


Contact Rating	10uA,2V DC to 20mA,15V DC
Contact Resistance	500mΩ max.
Insulation Resistance	50MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	160±50gf
Travel	0.13mm
Operating Life	300,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

T1C □ QR



CIRCUIT

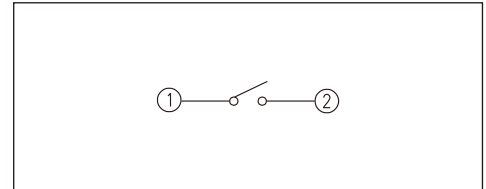

PACKAGE

<Tape & Reel>
5000 pcs

T1C

