


Width: 2 in. (5.1 cm)

Project:	
Type:	

## Model: BL100 (MR16 Bullet Light)

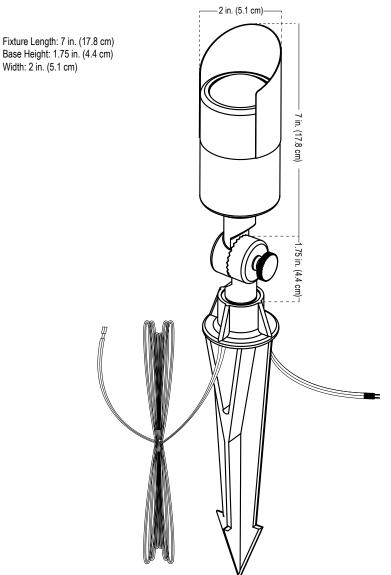

#### Specifications and Features:

Body: Solid brass with an aged brass finish

Knuckle: Solid brass with dial adjustment for easy adjustments

Shroud: Brass with a clear glass convex lens and double o-ring gasket

Socket: Spring loaded ceramic bi-pin socket with dual contact and lamp clips

Wire: Industry First, double wire lead pre-connected to the fixture, 16 awg (UL listed), brown

-25 foot wire lead, pre-stripped for easy wire connection

-18 inch wire lead, LED connection ready Stake: Plastic ground stake, attached to the fixture (8.5 in; 21.6 cm length)

Warranty: Lifetime warranty on fixture housing

Certification: Complies with the requirements of UL-1838 and CAN/CSA-C22.2 No. 250.7. Identified with the ETL and cETL Listed Mark.



### Lamp Options

Model #	Base Type	Angle	Wattage	Lumen Output
LMR16-LED-4W-NS	MR16	15°	4w	250lm
LMR16-LED-4W-F	MR16	45°	4w	250lm
LMR16-LED-4W-WF	MR16	60°	4w	250lm
LMR16-LED-5W-NS	MR16	15°	5w	310lm
LMR16-LED-5W-F	MR16	45°	5w	310lm
LMR16-LED-5W-WF	MR16	60°	5w	310lm
LMR16-LED-6W-F	MR16	45°	6w	400lm
LMR16-35-36 (Halogen)	MR16	45°	35w	310lm

LED Ordering Guide: Model-Lamp Wattage-Lamp Angle Example:BL100-LED-5W-F

	MR16 Accessories:		
Accessories Available:	Linear Lens		
Mounting Accessories:	Frosted Lens		
RISER6 - 6" brass riser, aged brass finish	Spread Lens		
RISER12 - 12" brass riser, aged brass finish	Blue Lens		
RISER18 - 18" brass riser, aged brass finish	Hex Louver		
RISERADJ - Adjustable plastic riser, aged brass cap			
RMB - Round Mounting Base			
GUTTERMOUNT			


Notes:




Project:
Type:

# **MR16 LED Photometric Comparisons**

### LMR16-LED-6W-F






LMR16-LED-5W-NS


LMR16-LED-5W-F
(also available in Blue, Red, Green and Amber)


LMR16-LED-5W-WF














LMR16-LED-4W-NS

LMR16-LED-4W-F

LMR16-LED-4W-WF

