

## SP-R-6'-LED CUSTOM MADE BOLLARD


### SPECIFICATIONS

BASE TYPE / CONNECTION	E26
BEAM ANGLE	360°
CCT	3000-5000K
CRI	>70
DIMENSIONS	Customized
DIMMABLE	YES
IP RATING	65
LIFE SPAN TO 80%	>50,000 HRS
LINE VOLTAGE	AC100-277
OPERATING TEMP	-40°C ~+80C
POWER CONSUMPTION	Optional
POWER FACTOR	>0.90
WARRANTY	5 years
WARRANTY	5 years
LENS	Frosted / Clear

### APPLICATION

Ideal for general illumination of walkways, plazas, pedestrian areas, and building entryways

### DIMENSIONS

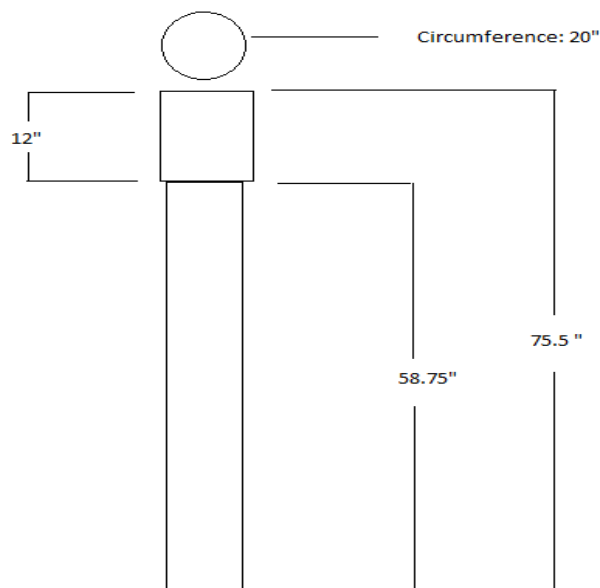

### CERTIFICATIONS



