





DEEP ROOF LIGHTING INC.
 55 Sea Cliff Avenue, Glen Cove, NY 11542
 P.O. BOX 520191, FLUSHING, NY 11352
 Tel: 516-676-9100, 9101, 9103, 9105, 9106
 Fax: 516-676-9109
[Web Site: www.deeprooflighting.com](http://www.deeprooflighting.com) www.deeprooflighting.org
[Email: deeproof@aol.com](mailto:deeproof@aol.com) cs@deeprooflighting.com

LED Slim Mini Panel Down Lights 4" 6"

ES, ETL L-series



- 4" Round 12W, 900 Lumen.....
- 4" Square 10W, 750-800 Lumen.....
- 6" Round and Square 15W, 1200 Lumen.....
- Durable airtight Aluminum body
- Edge light with redirect matrix technology
- 110-120 VAC input, 110-120° Beam angle
- 10-100% Dimmable, Triac dimming
- Extruded Aluminum hardwire junction box,
- Dimmable class II electronic LED driver
- Suitable damp location
- Suitable insulated ceiling
- Three "Quick connect" push-in terminals

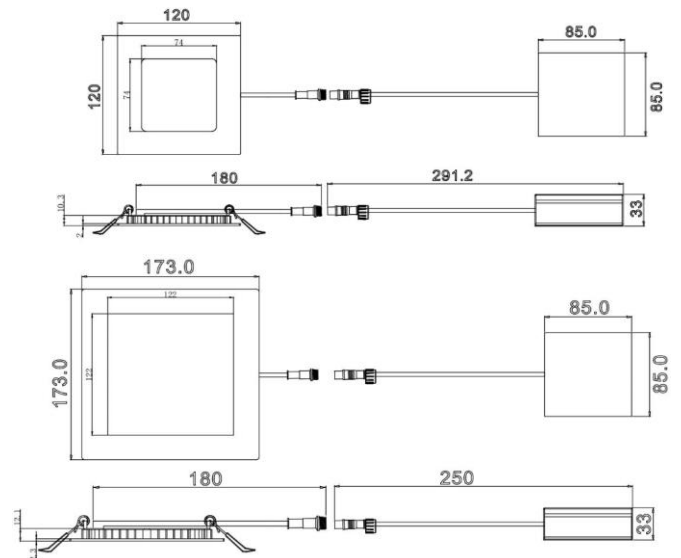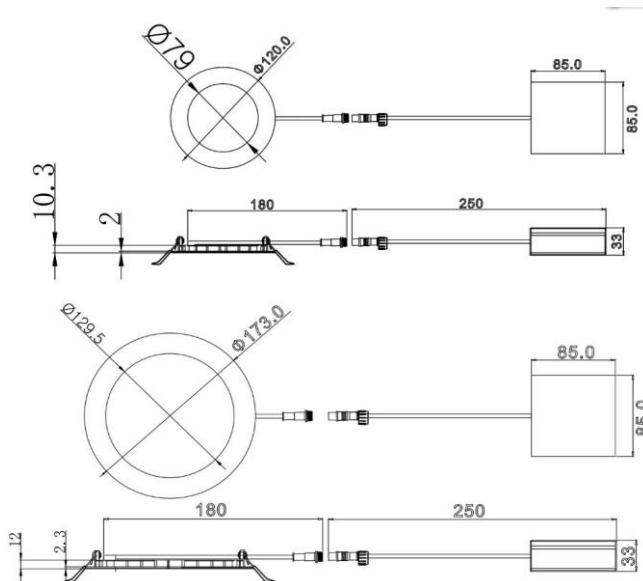

ITEM CODES

LSMR-L412-D30(W/B/SN)	Round 4" slim mini panel, 12W, dimmable, 3000K, White/Black/Satin nickel
LSMR-L412-D40(W/B/SN)	Round 4" slim mini panel, 12W, dimmable, 4000K, White/Black/Satin nickel
LSMR-L412-D50(W/B/SN)	Round 4" slim mini panel, 12W, dimmable, 5000K, White/Black/Satin nickel
LSMR-L615-D30(W/B/SN)	Round 6" slim mini panel, 15W, dimmable, 3000K, White/Black/Satin nickel
LSMR-L615-D40(W/B/SN)	Round 6" slim mini panel, 15W, dimmable, 4000K, White/Black/Satin nickel
LSMR-L615-D50(W/B/SN)	Round 6" slim mini panel, 15W, dimmable, 5000K, White/Black/Satin nickel
LSMQ-L410-D30(W/B/SN)	Square 4" slim mini panel, 10W, dimmable, 3000K, White/Black/Satin nickel
LSMQ-L410-D40(W/B/SN)	Square 4" slim mini panel, 10W, dimmable, 4000K, White/Black/Satin nickel
LSMQ-L410-D50(W/B/SN)	Square 4" slim mini panel, 10W, dimmable, 5000K, White/Black/Satin nickel
LSMQ-L615-D30(W/B/SN)	Square 6" slim mini panel, 15W, dimmable, 3000K, White/Black/Satin nickel
LSMQ-L615-D40(W/B/SN)	Square 6" slim mini panel, 15W, dimmable, 4000K, White/Black/Satin nickel
LSMQ-L615-D50(W/B/SN)	Square 6" slim mini panel, 15W, dimmable, 5000K, White/Black/Satin nickel


LED Slim Mini Panel Down Lights 4" 6"

ETL G-series






- 10 mm thickness slim mini panel
- Embossed pocking cold forged back plate
- 4" 12 watts, 850 - 950 Lumen
- 6" 18 watts, Up to 1500 Lumen



4 inch side-lit down light

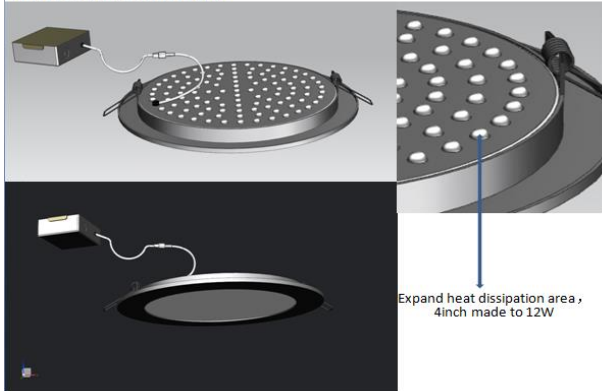

4" 3" adjustable, 360° rotation


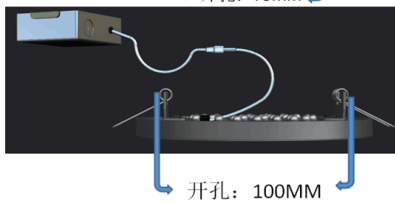
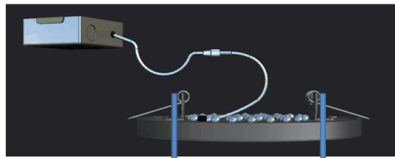


360度旋转

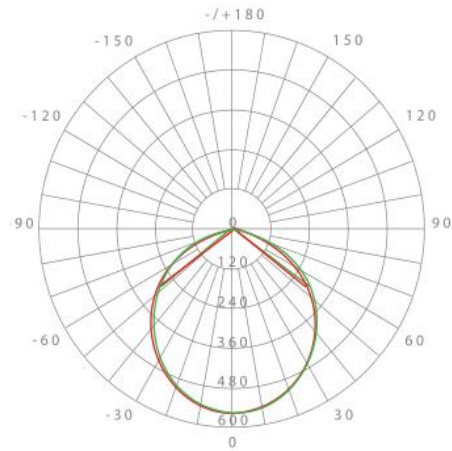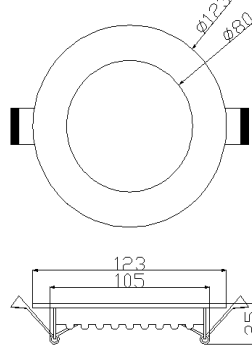

Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable	Materials	IP Rate
12W	120V AC	840	70	2700K	80 or 90RA	>0.95	Milky	Y	Pure Aluminum + PC	Damp
12W	120V AC	900	75	3000K	80 or 90RA	>0.95	Milky	Y	Dimm	Beam Angel
12W	120V AC	960	80	4000K	80 or 90RA	>0.95	Milky	Y	Triac Dimming	110°
12W	120V AC	996	83	6000K	80 or 90RA	>0.95	Milky	Y		

6" 5" adjustable, 360° rotation

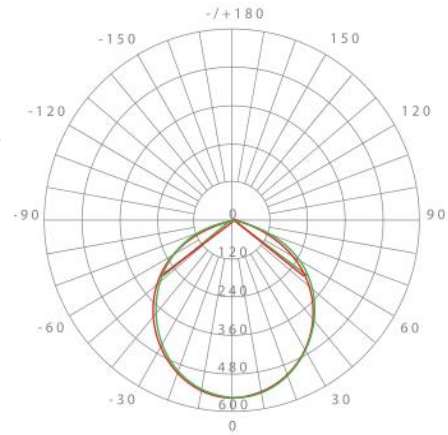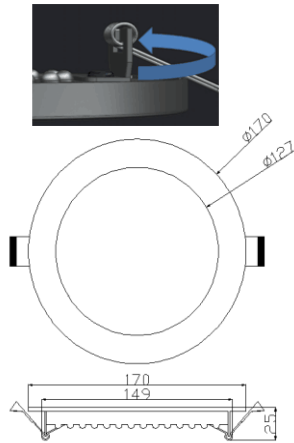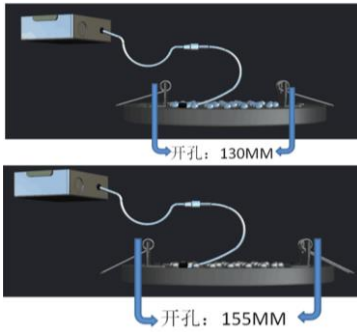

Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable	Materials	IP Rate
18W	120V AC	1260	70	2700K	80 or 90RA	>0.95	Milky	Y	Pure Aluminum + PC	Damp
18W	120V AC	1350	75	3000K	80 or 90RA	>0.95	Milky	Y	Dimm	Beam Angel
18W	120V AC	1440	80	4000K	80 or 90RA	>0.95	Milky	Y	Triac Dimming	110°
18W	120V AC	1494	83	6000K	80 or 90RA	>0.95	Milky	Y		



ITEM CODES

- LSMR-G412-D30(W/B/SN) Round 4" slim mini panel, 12W, dimmable, 3000K, White/Black/Satin nickel
- LSMR-G412-D40(W/B/SN) Round 4" slim mini panel, 12W, dimmable, 4000K, White/Black/Satin nickel
- LSMR-G412-D50(W/B/SN) Round 4" slim mini panel, 12W, dimmable, 5000K, White/Black/Satin nickel
- LSMR-G618-D30(W/B/SN) Round 6" slim mini panel, 18W, dimmable, 3000K, White/Black/Satin nickel
- LSMR-G618-D40(W/B/SN) Round 6" slim mini panel, 18W, dimmable, 4000K, White/Black/Satin nickel
- LSMR-G618-D50(W/B/SN) Round 6" slim mini panel, 18W, dimmable, 5000K, White/Black/Satin nickel

- LSMQ-G410-D30(W/B/SN) Square 4" slim mini panel, 10W, dimmable, 3000K, White/Black/Satin nickel
- LSMQ-G410-D40(W/B/SN) Square 4" slim mini panel, 10W, dimmable, 4000K, White/Black/Satin nickel
- LSMQ-G410-D50(W/B/SN) Square 4" slim mini panel, 10W, dimmable, 5000K, White/Black/Satin nickel
- LSMQ-G615-D30(W/B/SN) Square 6" slim mini panel, 15W, dimmable, 3000K, White/Black/Satin nickel
- LSMQ-G615-D40(W/B/SN) Square 6" slim mini panel, 15W, dimmable, 4000K, White/Black/Satin nickel
- LSMQ-G615-D50(W/B/SN) Square 6" slim mini panel, 15W, dimmable, 5000K, White/Black/Satin nickel

- LSMG-G415-D30W Gimble ring 4" mini panel, 15W, dimmable, 3000K, White
- LSMG-G415-D40W Gimble ring 4" mini panel, 15W, dimmable, 4000K, White
- LSMG-G415-D50W Gimble ring 4" mini panel, 15W, dimmable, 5000K, White

EASY INSTALLATION

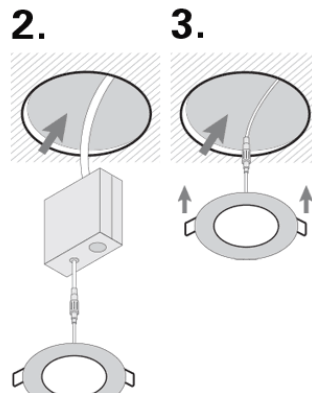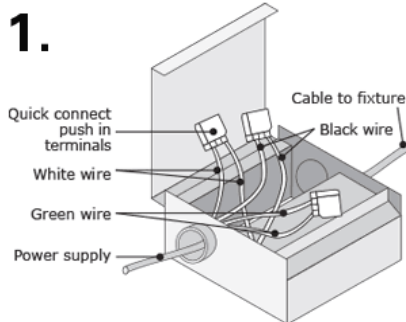


4" gimble ring - Heavy duty stand alone adjustable




Lumen output 1200-1300



Product Dimensions

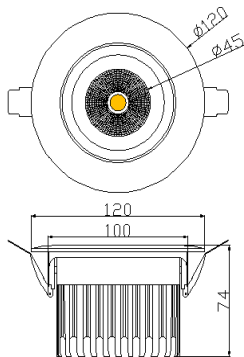


Photometric Data

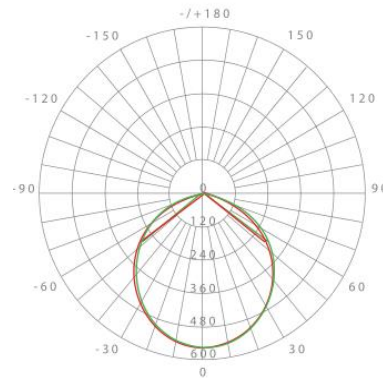

15W	120V AC	1200	90	2700K	80 or 90RA	>0.95	Milky	Y	Materials		IP Rate
15W	120V AC	1200	90	3000K	80 or 90RA	>0.95	Milky	Y	Pure Aluminum + PC		Damp
15W	120V AC	1300	95	4000K	80 or 90RA	>0.95	Milky	Y	Dimm	Beam Angel	
15W	120V AC	1300	95	6000K	80 or 90RA	>0.95	Milky	Y	Triac Dimming	110°	

Installation

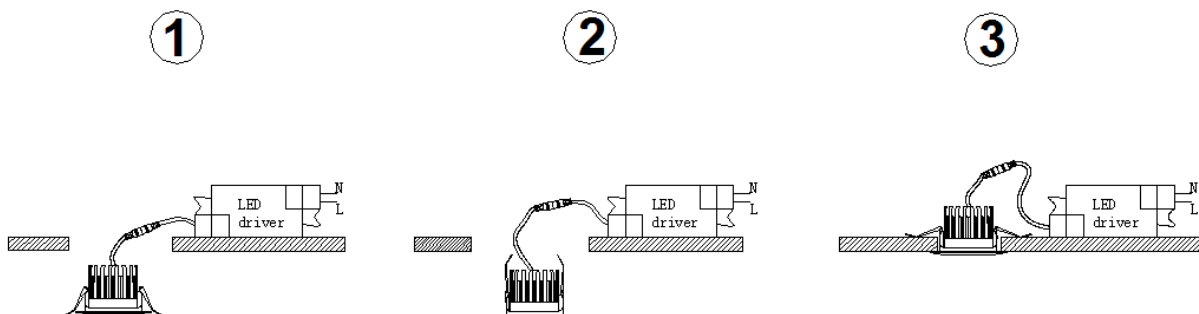


Square mini panel on 4" and 6"



LED 4" 10W Square Slim panel

Mod.No.	Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable
LSMQ-G410-D30(W/B/SN)	10W	120V AC	750	75	3000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G410-D40(W/B/SN)	10W	120V AC	800	80	4000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G410-D50(W/B/SN)	10W	120V AC	850	83	5000K	80 or 90RA	>0.90	Milky	Y

Operating Frequency	Size	Dimmable	Beam Angel	Base	Finish/Color
60HZ	120*120*15 mm	Triac Dimming	110°		White / Nickle Satin / Black
IP Rating	THD (%)	LED Chip	Life Time	Warranty	Materials
Damp	<17.22%	Epistar	50000hrs	5 years	Pure Aluminum + PC

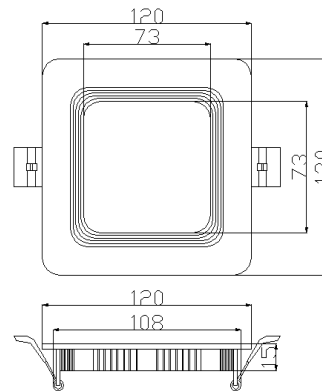

LED 6" 12W Square Slim panel

Mod.No.	Power	Input	Lumens	Efficacy	CCT	CRI	Power Factor	LENS	Dimmable
LSMQ-G615-D30(W/B/SN)	15W	120V AC	1250	80	3000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G615-D40(W/B/SN)	15W	120V AC	1250	85	4000K	80 or 90RA	>0.90	Milky	Y
LSMQ-G615-D50(W/B/SN)	15W	120V AC	1250	85	5000K	80 or 90RA	>0.90	Milky	Y

Operating Frequency	Size	Dimmable	Beam Angel	Base	Finish/Color
60HZ	173*173*15 mm	Triac Dimming	110°		White / Nickle Satin / Black
IP Rating	THD (%)	LED Chip	Life Time	Warranty	Materials
Damp	<17.22%	Epistar	50000hrs	5 years	Pure Aluminum + PC

