
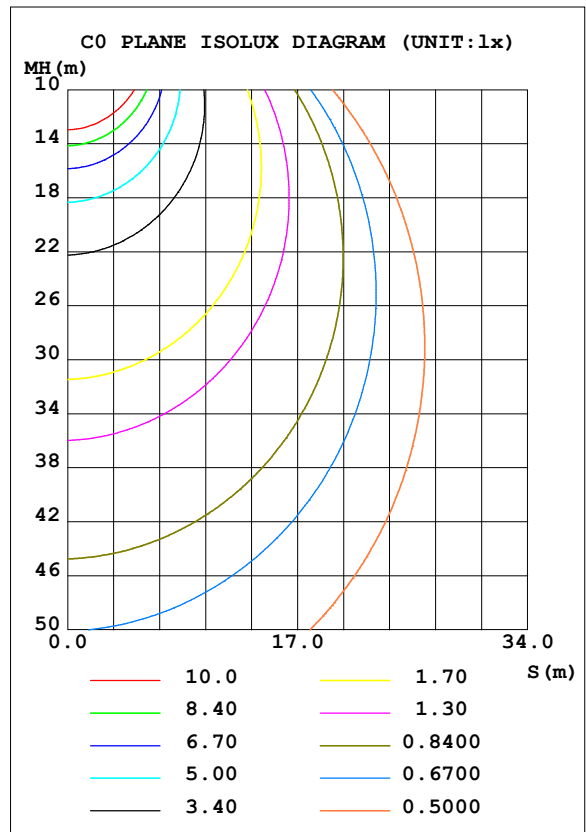


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.08 lm/W			
MODEL	SMD2835/LED	I _{max} (cd)	1686	S/MH (C0/180)	1.24
NOMINAL POWER (W)	39.4	LOR (%)	100.0	S/MH (C90/270)	1.16
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	4376.6	η UP, DN (C0-180)	0.5, 51.0
NOMINAL FLUX (lm)	4376.57	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 48.1
LAMPS INSIDE	1	η up (%)	1.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	221.4	η down (%)	99.0	CIBSE SHR MAX	1.35

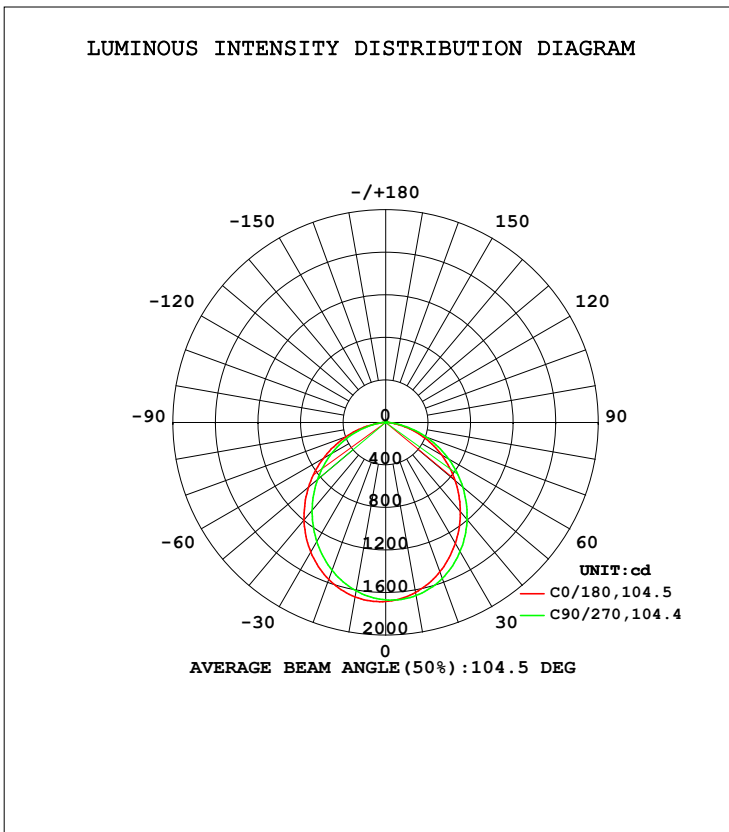

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: MO FU MEI
 Test Date: 2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity: 65.0%
 Test Distance: 7.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1623	1637	1652	1654	1665	1635	1608	1596	0- 10	157.6	157.6	3.6,3.6
20	1494	1527	1560	1569	1570	1520	1478	1463	10- 20	446.8	604.5	13.8,13.8
30	1312	1356	1401	1415	1409	1346	1296	1278	20- 30	664.1	1269	29,29
40	1094	1142	1191	1206	1196	1128	1077	1061	30- 40	779.8	2048	46.8,46.8
50	854.7	900.9	947.5	959.2	948.4	882.9	838.9	824.8	40- 50	784.6	2833	64.7,64.7
60	604.8	644.9	682.6	689.1	679.9	624.1	590.9	581.0	50- 60	685.3	3518	80.4,80.4
70	354.2	383.7	409.1	409.3	401.1	360.9	341.3	337.3	60- 70	500.0	4018	91.8,91.8
80	124.0	140.1	150.2	144.9	138.7	119.4	113.7	116.0	70- 80	262.3	4281	97.8,97.8
90	2.576	2.616	2.279	1.459	1.234	1.584	1.854	2.513	80- 90	54.10	4335	99,99
100	4.346	3.015	2.414	2.264	2.063	2.525	3.249	3.829	90-100	2.496	4337	99.1,99.1
110	6.363	4.678	3.822	3.529	3.238	3.888	5.000	5.612	100-110	3.892	4341	99.2,99.2
120	8.303	6.356	5.210	4.923	4.731	5.559	6.916	7.636	110-120	5.257	4346	99.3,99.3
130	10.13	8.205	6.699	6.450	6.392	7.409	8.786	9.653	120-130	6.303	4353	99.5,99.5
140	11.74	9.994	8.289	8.083	8.153	9.198	10.56	11.44	130-140	6.803	4359	99.6,99.6
150	13.00	11.60	10.19	9.722	9.915	10.91	12.23	12.84	140-150	6.571	4366	99.8,99.8
160	14.06	12.62	11.79	11.30	11.66	12.54	13.33	13.62	150-160	5.528	4372	99.9,99.9
170	14.51	13.90	13.21	12.75	13.28	13.84	14.08	14.02	160-170	3.722	4375	100,100
180	14.39	14.50	14.24	13.84	14.43	14.53	14.25	13.87	170-180	1.328	4377	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2446.9 lm

%lum = 55.9%
 %lamp = 55.9%

Conical surface Flux(120deg): 3518.2 lm


%lum = 80.4%
 %lamp = 80.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

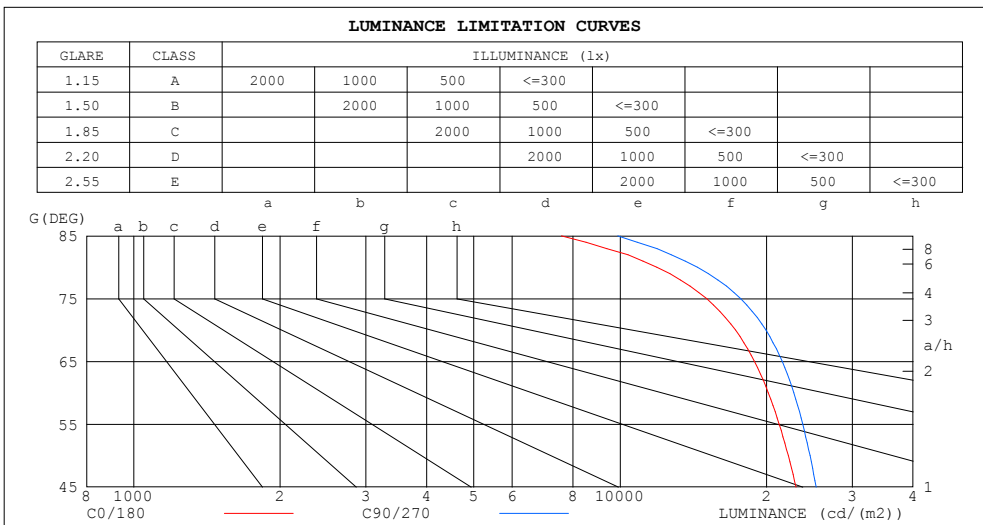

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7572	9893
80	11901	14414
75	15056	17695
70	17261	19937
65	18895	21538
60	20159	22754
55	21227	23733
50	22161	24568
45	22995	25276


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.04	1.00	.97	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.82	.78	.74	.79	.76	.73	.70
3.0	.81	.73	.66	.79	.71	.66	.76	.69	.64	.73	.68	.63	.70	.66	.62	.60
4.0	.71	.63	.56	.70	.62	.56	.67	.61	.55	.65	.59	.54	.63	.58	.53	.51
5.0	.64	.55	.49	.63	.55	.48	.61	.53	.48	.59	.52	.47	.57	.51	.47	.44
6.0	.58	.49	.43	.57	.48	.42	.55	.47	.42	.53	.46	.41	.51	.46	.41	.39
7.0	.52	.44	.38	.52	.43	.38	.50	.43	.37	.48	.42	.37	.47	.41	.37	.35
8.0	.48	.39	.34	.47	.39	.34	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

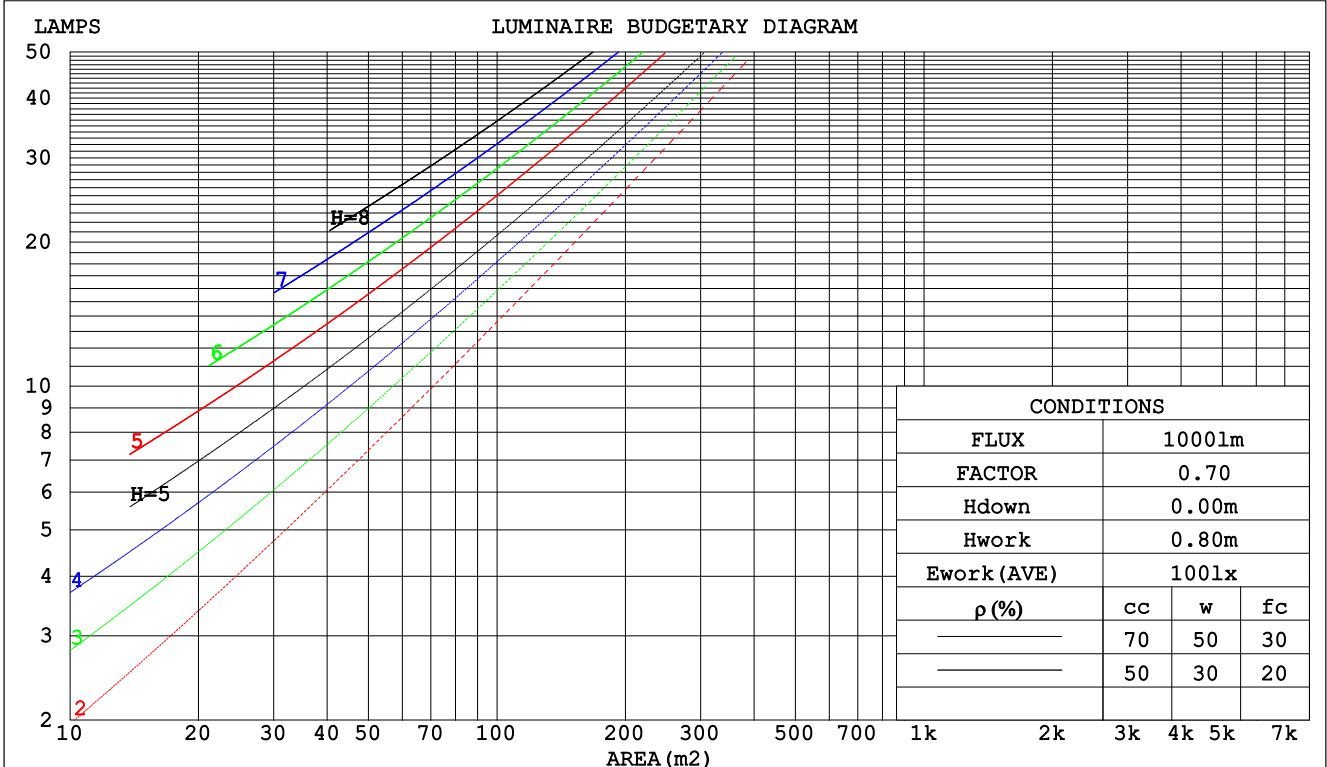

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.295	.167	.053	.287	.164	.052	.273	.157	.050	.261	.150	.048	.249	.144	.047	
2.0	.280	.154	.047	.274	.151	.046	.262	.146	.045	.251	.141	.044	.240	.136	.043	
3.0	.261	.139	.042	.255	.137	.041	.245	.133	.040	.235	.129	.039	.226	.125	.039	
4.0	.242	.126	.037	.237	.124	.037	.228	.121	.036	.219	.117	.035	.210	.114	.035	
5.0	.225	.114	.033	.220	.113	.033	.212	.110	.032	.204	.108	.032	.196	.105	.032	
6.0	.209	.105	.030	.205	.103	.030	.197	.101	.029	.190	.099	.029	.184	.097	.029	
7.0	.195	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.089	.026	
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.162	.083	.024	
9.0	.171	.083	.023	.168	.082	.023	.163	.080	.023	.158	.079	.023	.153	.078	.022	
10.0	.161	.077	.021	.158	.077	.021	.154	.075	.021	.149	.074	.021	.144	.073	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.187	.164	.143	.160	.140	.123	.109	.097	.085	.063	.056	.049	.020	.018	.016	
2.0	.178	.139	.107	.153	.120	.092	.105	.083	.064	.060	.048	.038	.019	.016	.012	
3.0	.170	.122	.083	.146	.105	.072	.100	.073	.050	.058	.043	.030	.019	.014	.010	
4.0	.163	.108	.067	.140	.094	.058	.096	.065	.041	.055	.038	.024	.018	.012	.008	
5.0	.155	.098	.056	.133	.085	.048	.092	.059	.034	.053	.035	.020	.017	.011	.007	
6.0	.148	.089	.047	.127	.077	.041	.088	.054	.029	.051	.032	.017	.016	.010	.006	
7.0	.141	.083	.041	.122	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
8.0	.135	.077	.037	.116	.067	.032	.080	.047	.023	.047	.028	.014	.015	.009	.004	
9.0	.129	.072	.033	.111	.062	.029	.077	.044	.021	.045	.026	.012	.015	.008	.004	
10.0	.124	.068	.030	.107	.059	.026	.074	.041	.019	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm										
NAME: SC-SL8456T-040-AW-A02-01CW					TYPE:Linear Light			WEIGHT:Kg		
SPEC.:40W					DIM.: 603*603*84 (MM)			SERIAL No.:01		
MFR.: Signcomplex					SUR.:1150*50 (MM)			Shielding Angle:60		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.2	19.7	18.5	19.9	20.2	18.7	20.2	19.0	20.4	20.6
3H	19.6	20.9	19.9	21.2	21.4	20.1	21.5	20.4	21.7	22.0
4H	20.0	21.3	20.4	21.6	21.9	20.7	22.0	21.0	22.2	22.5
6H	20.3	21.5	20.7	21.8	22.1	21.0	22.2	21.3	22.5	22.8
8H	20.4	21.5	20.7	21.8	22.1	21.1	22.2	21.4	22.5	22.8
12H	20.4	21.5	20.7	21.8	22.1	21.1	22.2	21.5	22.5	22.8
4H 2H	18.9	20.2	19.2	20.4	20.7	19.2	20.5	19.5	20.8	21.1
3H	20.4	21.5	20.7	21.8	22.1	20.8	22.0	21.2	22.3	22.6
4H	21.0	22.0	21.3	22.3	22.7	21.5	22.5	21.9	22.8	23.2
6H	21.3	22.2	21.7	22.6	23.0	21.9	22.8	22.3	23.2	23.6
8H	21.4	22.3	21.8	22.6	23.1	22.0	22.9	22.5	23.3	23.7
12H	21.4	22.2	21.9	22.6	23.0	22.1	22.9	22.5	23.3	23.7
8H 4H	21.2	22.0	21.6	22.4	22.8	21.7	22.5	22.1	22.9	23.3
6H	21.7	22.4	22.1	22.8	23.3	22.2	22.9	22.7	23.3	23.8
8H	21.8	22.5	22.3	22.9	23.4	22.4	23.0	22.9	23.5	23.9
12H	21.9	22.4	22.4	22.9	23.4	22.5	23.0	23.0	23.5	24.0
12H 4H	21.2	22.0	21.6	22.4	22.8	21.7	22.4	22.1	22.8	23.3
6H	21.7	22.3	22.2	22.8	23.3	22.2	22.9	22.7	23.3	23.8
8H	21.9	22.4	22.4	22.9	23.4	22.5	23.0	22.9	23.4	23.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.3				

CIE Pub.117, 4377 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 5.1)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	47	41	58	47	40	57	47	40	34
0.80	69	57	50	68	57	50	66	56	50	43
1.00	77	66	59	76	66	59	74	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	80	73	87	79	72	84	77	71	64
2.00	96	88	81	94	86	81	90	84	79	71
2.50	100	92	86	97	91	85	94	88	83	75
3.00	103	96	91	101	95	90	96	92	88	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	101	107	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

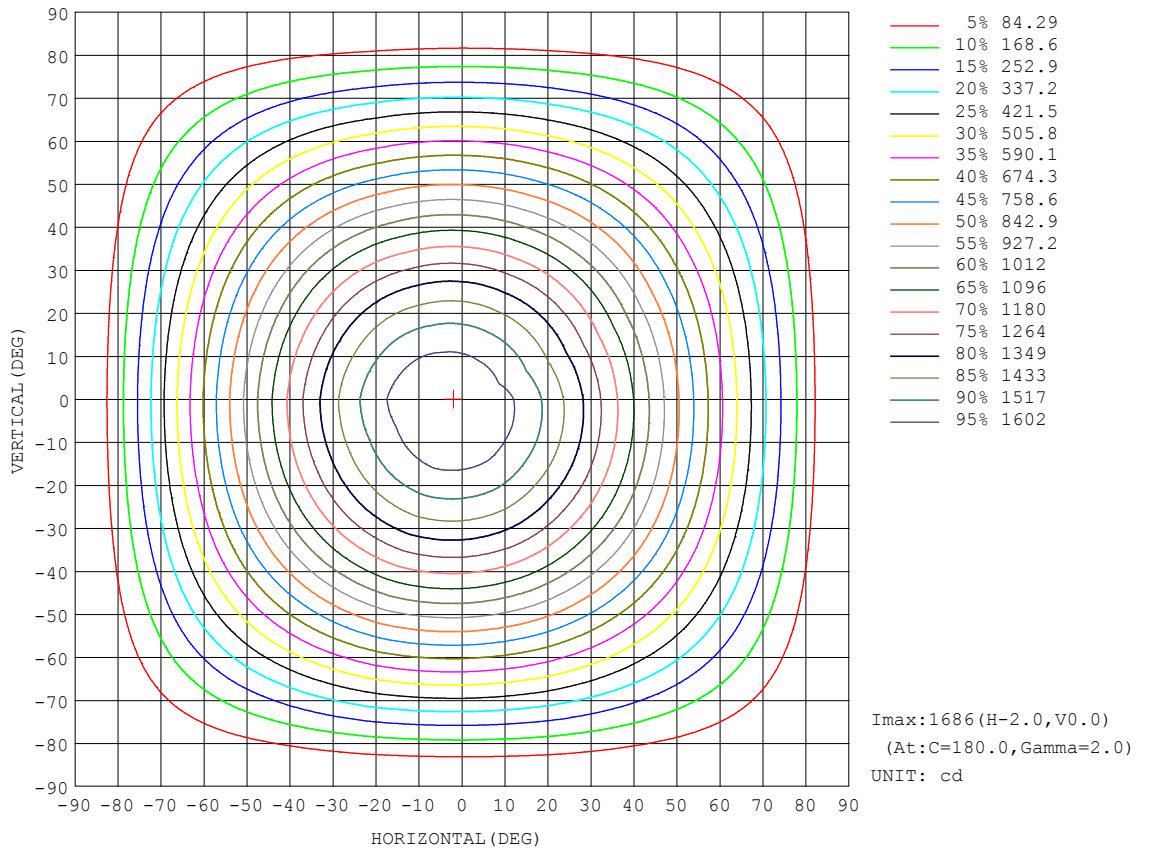


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

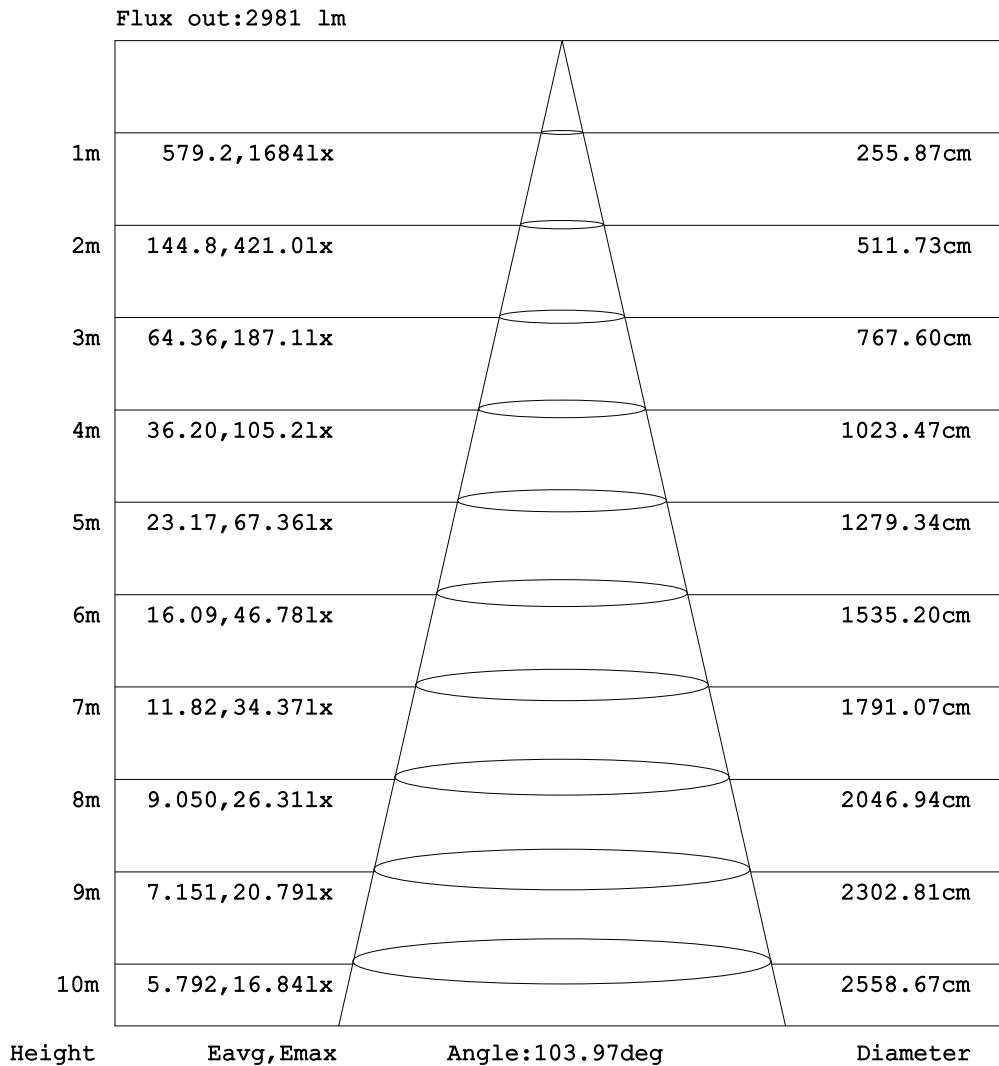


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

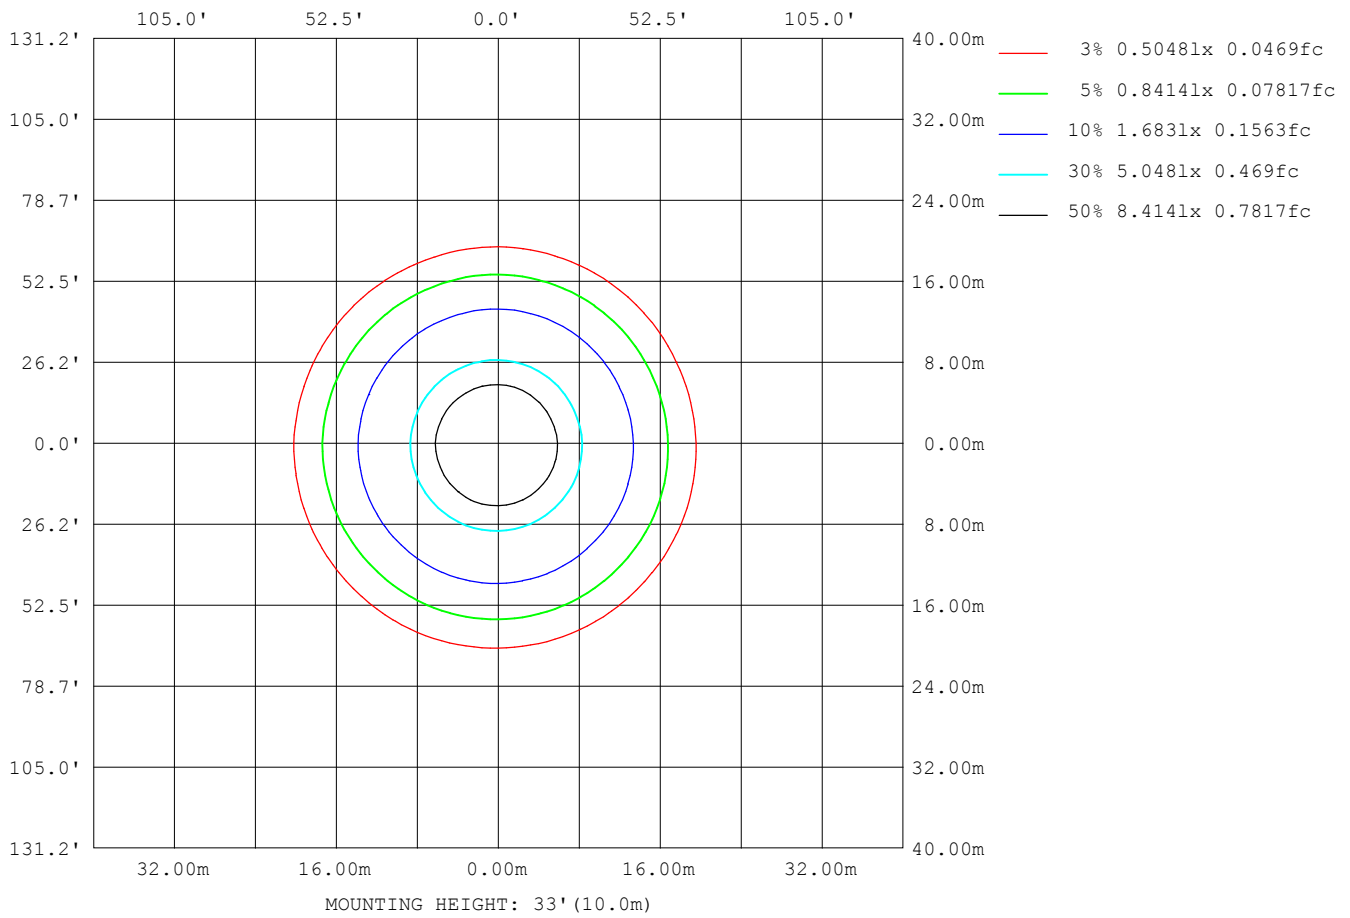

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60


AvgL	cd/m2
L_0~180 (65) av	20113
L_0~180 (75) av	16064
L_0~180 (85) av	7815
L_90~270 (65) av	19947
L_90~270 (75) av	16007
L_90~270 (85) av	8198
L_45 (65) av	19858
L_45 (75) av	15858
L_45 (85) av	7734

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

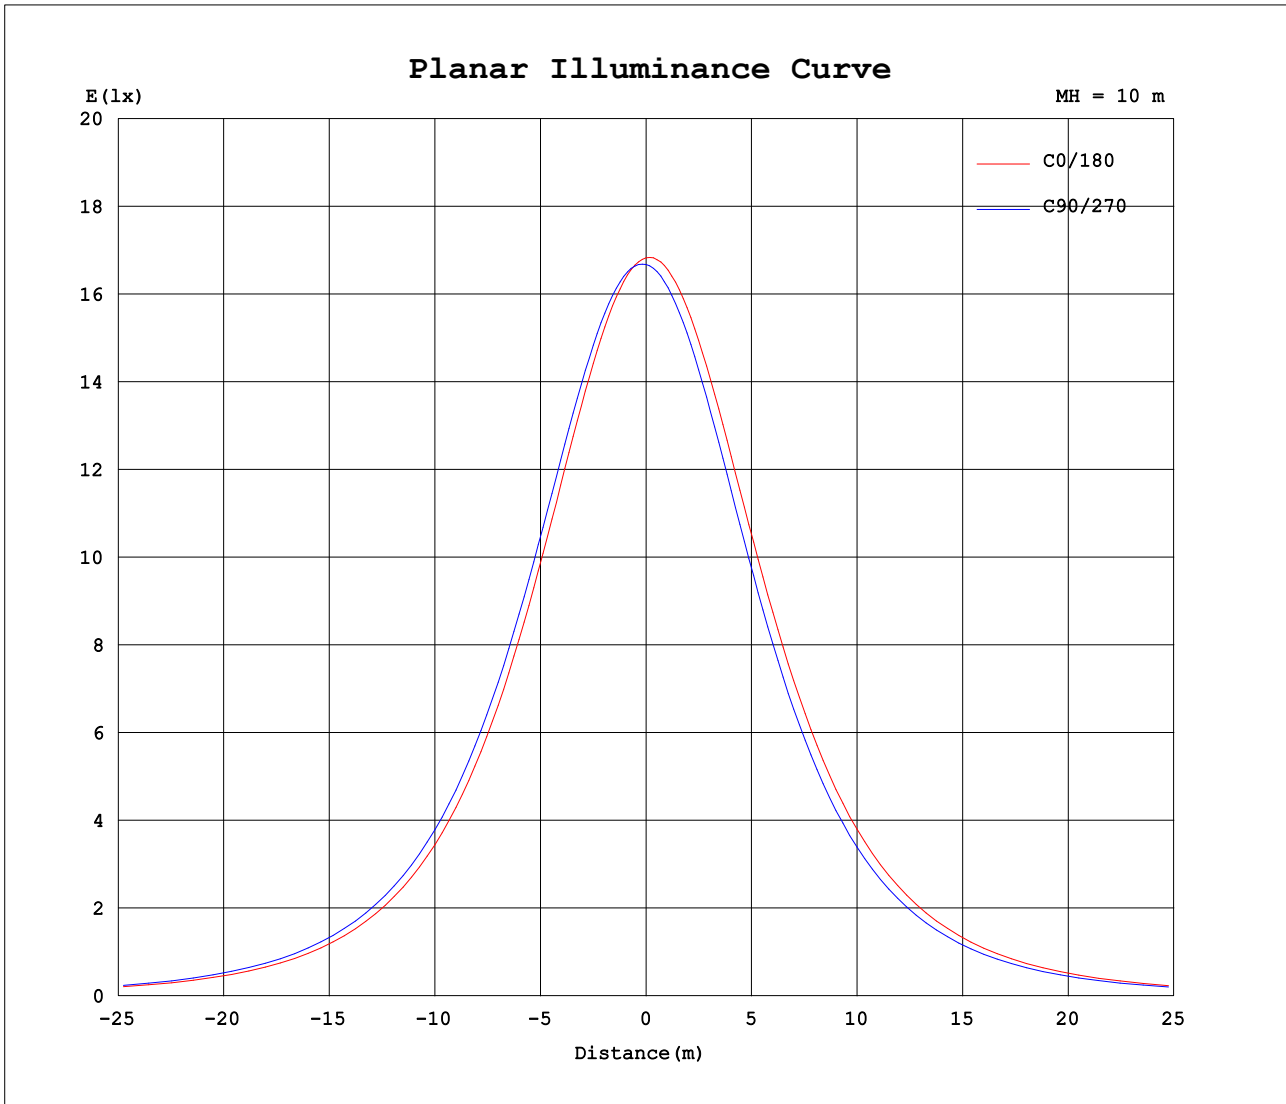

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.4V I:0.1830A P:39.40W PF:0.9730 Freq:50.00Hz Lamp Flux:4376.57x1 lm		
NAME: SC-SL8456T-040-AW-A02-01CW	TYPE:Linear Light	WEIGHT:Kg
SPEC.:40W	DIM.: 603*603*84 (MM)	SERIAL No.:01
MFR.: Signcomplex	SUR.:1150*50 (MM)	Shielding Angle:60

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1683	1678	1674	1671	1668	1665	1662	1660	1683	1678	1674	1671	1668	1665	1662	1660			
5	1663	1664	1665	1668	1670	1670	1668	1664	1685	1674	1664	1654	1647	1641	1638	1636			
10	1623	1629	1637	1646	1652	1656	1654	1649	1665	1650	1635	1618	1608	1599	1596	1595			
15	1566	1577	1590	1607	1615	1623	1621	1616	1627	1606	1587	1565	1551	1539	1537	1536			
20	1494	1510	1527	1548	1560	1571	1569	1563	1570	1545	1520	1494	1478	1465	1463	1462			
25	1408	1428	1448	1473	1488	1501	1500	1494	1497	1467	1440	1410	1392	1378	1376	1376			
30	1312	1334	1356	1384	1401	1416	1415	1408	1409	1376	1346	1314	1296	1281	1278	1280			
35	1206	1230	1253	1283	1302	1317	1316	1309	1308	1272	1242	1208	1189	1175	1173	1174			
40	1094	1118	1142	1171	1191	1208	1206	1200	1196	1160	1128	1095	1077	1062	1061	1063			
45	976	1000	1024	1053	1072	1088	1086	1080	1075	1040	1008	976	960	946	945	947			
50	855	879	901	929	948	962	959	955	948	914	883	853	839	827	825	829			
55	731	754	774	801	817	831	826	824	816	784	755	727	716	705	704	708			
60	605	626	645	668	683	694	689	687	680	650	624	600	591	582	581	585			
65	479	499	514	534	546	554	549	548	541	514	492	471	465	459	458	462			
70	354	372	384	401	409	415	409	408	401	378	361	344	341	336	337	340			
75	234	247	257	270	275	278	272	270	265	246	235	222	222	219	222	223			
80	124	133	140	148	150	150	145	143	139	126	119	112	114	113	116	117			
85	39.6	44.7	46.9	52.3	51.7	50.5	45.0	44.9	42.1	35.9	33.6	31.5	34.0	34.1	36.2	36.2			
90	2.58	2.65	2.62	3.18	2.28	2.08	1.46	1.35	1.23	1.41	1.58	1.73	1.85	2.27	2.51	2.39			
95	3.34	2.71	2.24	1.93	1.80	1.71	1.69	1.67	1.59	1.77	1.97	2.24	2.52	2.86	3.03	2.95			
100	4.35	3.59	3.01	2.61	2.41	2.29	2.26	2.24	2.06	2.26	2.52	2.88	3.25	3.65	3.83	3.70			
105	5.35	4.52	3.83	3.34	3.09	2.92	2.88	2.87	2.62	2.85	3.16	3.60	4.08	4.52	4.68	4.49			
110	6.36	5.47	4.68	4.12	3.82	3.56	3.53	3.53	3.24	3.53	3.89	4.42	5.00	5.49	5.61	5.34			
115	7.35	6.41	5.51	4.92	4.55	4.16	4.21	4.22	3.95	4.22	4.70	5.32	5.96	6.56	6.62	6.23			
120	8.30	7.36	6.36	5.75	5.21	4.80	4.92	4.94	4.73	4.97	5.56	6.29	6.92	7.61	7.64	7.15			
125	9.23	8.29	7.28	6.61	5.97	5.51	5.66	5.70	5.53	5.84	6.48	7.28	7.87	8.62	8.66	8.11			
130	10.1	9.24	8.20	7.52	6.70	6.28	6.45	6.51	6.39	6.74	7.41	8.26	8.79	9.59	9.65	9.05			
135	11.0	10.1	9.11	8.43	7.45	7.05	7.26	7.34	7.26	7.65	8.33	9.24	9.65	10.5	10.6	9.99			
140	11.7	11.0	9.99	9.33	8.29	7.91	8.08	8.16	8.15	8.55	9.20	10.2	10.6	11.4	11.4	10.8			
145	12.4	11.6	10.8	10.2	9.28	8.79	8.88	8.94	9.03	9.44	10.0	11.1	11.5	12.2	12.2	11.6			
150	13.0	12.1	11.6	11.1	10.2	9.73	9.72	9.76	9.91	10.3	10.9	11.9	12.2	13.0	12.8	12.3			
155	13.6	12.7	12.2	11.9	11.1	10.7	10.6	10.6	10.8	11.1	11.8	12.6	12.8	13.5	13.3	12.9			
160	14.1	13.4	12.6	12.6	11.8	11.5	11.3	11.3	11.7	11.9	12.5	13.2	13.3	13.8	13.6	13.3			
165	14.3	13.9	13.3	13.3	12.5	12.3	12.0	12.0	12.5	12.7	13.3	13.8	13.8	14.1	13.9	13.6			
170	14.5	14.2	13.9	13.9	13.2	13.0	12.8	12.7	13.3	13.3	13.8	14.2	14.1	14.3	14.0	13.8			
175	14.5	14.4	14.3	14.3	13.8	13.6	13.4	13.3	13.9	13.9	14.3	14.5	14.2	14.2	14.0	13.8			
180	14.4	14.3	14.5	14.6	14.2	14.1	13.8	13.7	14.4	14.3	14.5	14.6	14.3	14.1	13.9	13.7			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:MO FU MEI
 Test Date:2017-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.361
 Humidity:65.0%
 Test Distance:7.000m [K=1.0000]
 Remarks: