



## 70W LED Glass Wall Pack



### Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED  $T_j < 85^{\circ}\text{C}$ .
- Excellent Optics design, greatly improve the light utilization and evenness.

### Product Applications

GL LED Glass Wall Pack series can be widely used in indoor or outdoor lighting (Wet location), like mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station, indoor stadiums.






## Specifications

Unit : inch(mm)

### Structure Features

- Shell materials: Aluminum & Glass.
- Finish: Dark Bronze/White
- Net weight : 4.7Kg (10.4 lbs) Product
- Size:15.4"\*9.9"\*9.6"
- Carton Size:17.71"\*12.4"\*12.2"



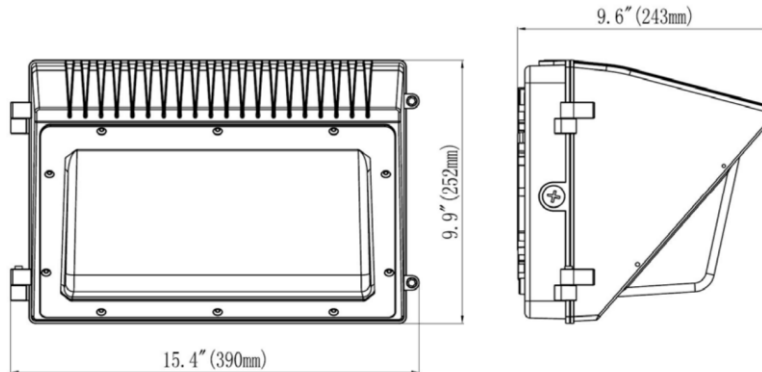


## Technical Parameters

### GL-GWP07W27-XXK-Z[D,W,B]-P[Blank,P]

Power	70W	Lighting Angle	87°x118°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	9100 Lm	Storage Temperature	-40 - +80°C
Color Temperature	3000K/4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>70	Cable	Input Connect, No cable

## Photometry

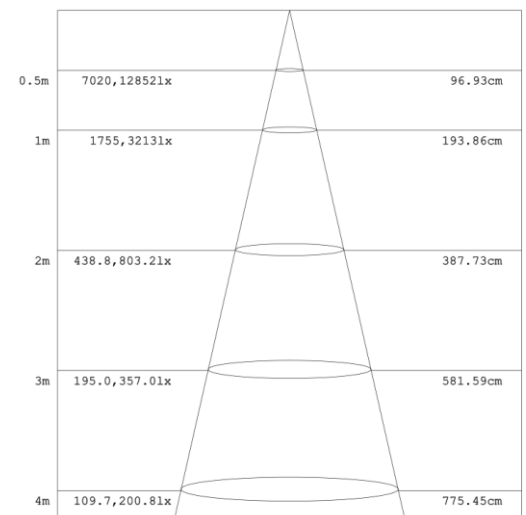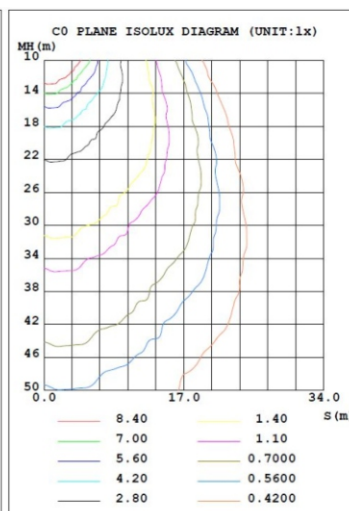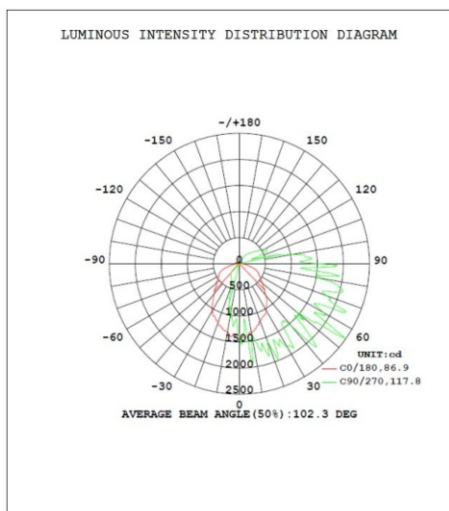

### Example:GL-GWP07W27-XXK-Z[D,W,B]-P[Blank,P]

GL	GWP	07W	27	XXK	Z	P
Company	Product	Power	Voltage	Color Temp	Finish	Control
	GWP	07W(70W)	27	30K(3000K)	<b>D (Dark Bronze)</b>	P
GL LED	Glass Wall		AC120-277V	40K(4000K)	W (White)	Photocell
	Pack			<b>50K(5000K)</b>	B (Black)	