



## 65W LED Slim Canopy Light



### Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED  $T_j < 85^{\circ}\text{C}$ .
- Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)

### Product Applications

GL LED Slim Canopy Light series can be widely used in outdoor lighting (Wet location), Excellent for Museums, Art Galleries, Parking Garage, Buildings, The lawn, Industrial areas, Residential areas, Sidewalks, Schools and etc, and many more applications.






## Specifications

Unit : inch(mm)

### Structure Features

- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/White
- Net weight : 2.7Kg (6.0lbs)
- Product Size: 10.05"\*10.05"\*3.3"
- Carton Size: 10.63"\*10.63"\*4.33"

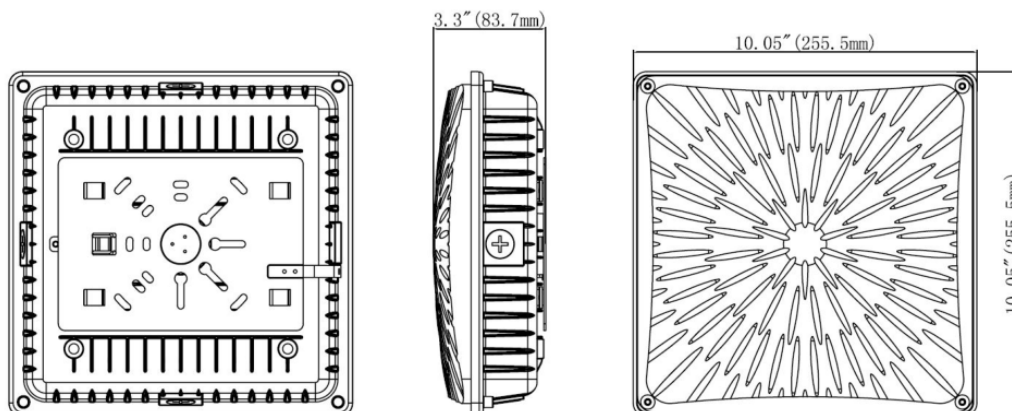


## Technical Parameters

### GL-CP65W27-XXK-Z[D,W,B,S]-\*[Blank,M]

Power	65W	Lighting Angle	159°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	8450 Lm	Storage Temperature	-40 - +80°C
Color Temperature	3000K/4000K/5000K	Protection Level	Wet Location/IP65
CRI	Ra>70	Cable	Input Connect, 0.3m
Optional dimming function	1-10Vdc		

## Photometry

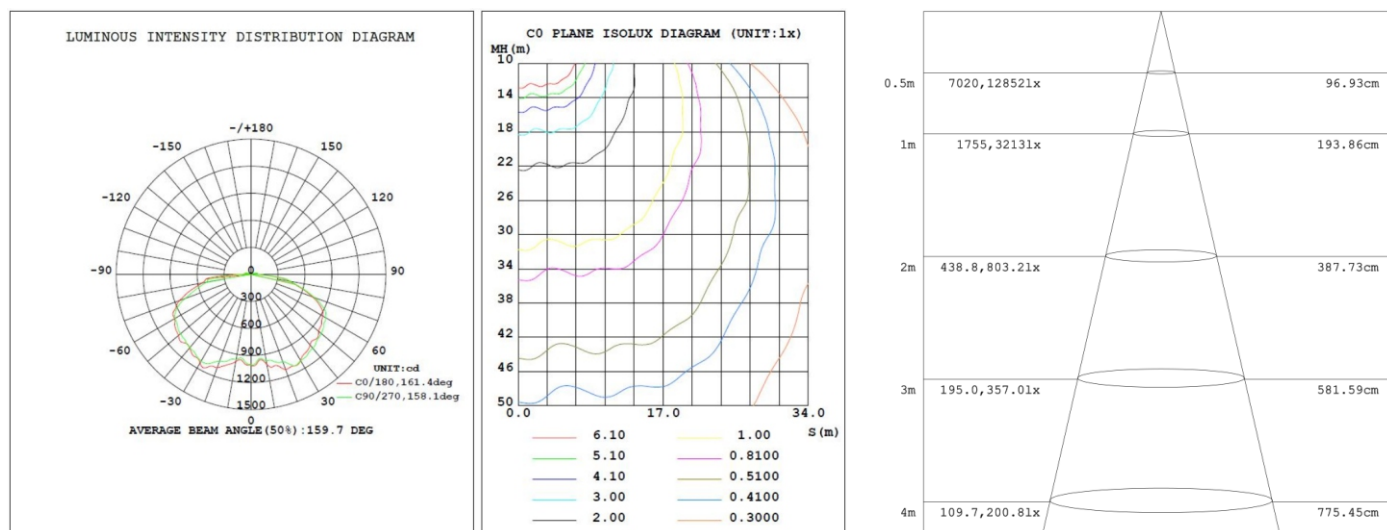

### Example: GL-CP65W27-XXK-Z[D,W,B,S]-\*[Blank,M]

GL	CP	65W	27	XXK	Z	*
Company	Product	Power	Voltage	Color Temp	Finish	Motion sensor
	CP	65W(65W)	27	30K(3000K)	<b>D (Dark Bronze)</b>	M
GL LED	Slim Canopy		AC120-277V	40K(4000K)	W (White)	Motion sensor
				<b>50K(5000K)</b>	B (Black)	
					S (Silvery)	