

MODEL #



PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	

FOOTBALL WALL PACK LIGHT

- LUMILEDS LED, high luminous efficiency and long working life.
- ❖ High efficiency LED Driver, the wide range input voltage AC120-277V;
- \diamond Cast alloy design, better cooling, light quality, LED Tj < 85° C.
- Optical design, greatly improved the light utilization and evenness
- **❖ PHOTOCELL CONTROL (OPTIONAL)**

Additional Information:

PRODUCT FEATURES:

o Power: 70W

o Input: AC 120-277V

o CCT: 5000K

o Output: 8300 LM

o Light Source: LUMILEDS

o Driver: OWN

Structure Features:

o Shell Material: Alloy & PC

o Color: Dark Bronze


o Weight: 8.0 lbs.






PRODUCT APPLICATIONS:

LED WALL PACK Lighting Series can be widely used in Pedestrian Walkways, Parking Garages, Public Areas, Schools, Hospitals, Hotels and Outdoor Walkways

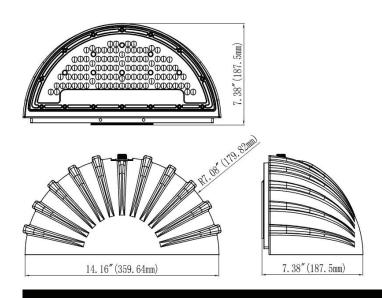







FOOTBALL WALL PACK LIGHT

TECHNICAL PARAMETERS:

Туре	1L-BWP07W27-XXK-Z-Y				
Power	70W	Lighting Angle	45*9 0°		
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs		
PF	>0.95	Working Life	>50000 hrs		
Driver Efficiency	>90%	Working Temperature	-30 -+45℃		
Luminous Flux	8300Lm	Storage Temperature	-40 -+80℃		
Color Temperature	3000K/4000K/5000K/6500K	Protection Level	Wet Location/IP65		
CRI	Ra>80	Cable	Input Connect, No Cable		

LIGHT DISTRIBUTION CURVE: (Clear Lens)

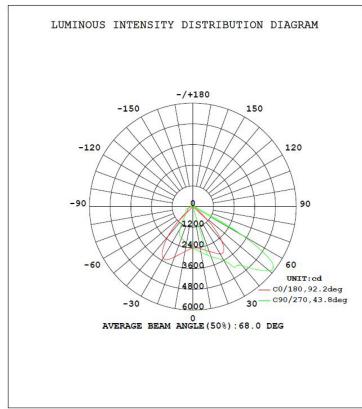

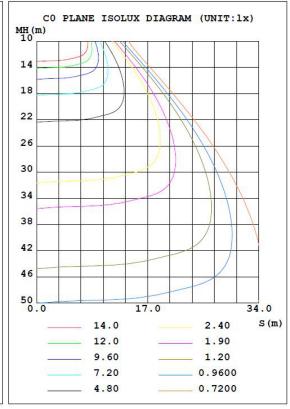



FOOTBALL WALL PACK LIGHT

ORDERING INFORMATION:

EXAMPLE: 1L-BWP07W 27-XXK-Z-Y

1L	BWP	07W	27	50K	Р
Company	Product	Power	Voltage	ColorTemp	Control
GL LED	BWP Football Wall Pack	45W (45W) 07W (70W)	27 AC120-277V 48 AC200-480V	30K (3000K) 40K (4000K) 50K (5000K) 57K (5700K) ± 500K	P12 120V PHOTOCELL P27 277V PHOTOCELL

PRODUCT CERTIFICATIONS:







Email: admin@glledllc.com Website: www.glledllc.com