

GL LED LLC



8 Feet LED T8 Tube Light

Features

1. Input voltage: 100-277V.
2. High efficacy, 110lm/W for frosted PC cover, 120lm/W for clear PC cover.
3. PF>0.9, CRI>80.
4. 3 years warranty.
5. Warehouse in Los Angeles.

GL LED LLC

Tel: 312-600-9363

Email: sales@gledllc.com

Address: 501 W 18TH St. Chicago 60616

Website: www.Gledllc.com


GL LED LLC

Parameter


Model No.	U608-8F40W		U608-8F45W	
Size	Dia.26*2367mm		Dia.26*2367mm	
Wattage	40W		45W	
LED Qty	240 pcs		240 pcs	
LED Type	SMD2835		SMD2835	
Luminous Flux	Frosted	110lm/W \pm 10%	Frosted	110lm/W \pm 10%
	Clear	120lm/W \pm 10%	Clear	120lm/W \pm 10%
CRI	>80		>80	
CCT	2800-3200K 3900-4300K 4800-5300K 6000-6500K		2800-3200K 3900-4300K 4800-5300K 6000-6500K	
Lighting Angle	180 Degree		180 Degree	
Input Voltage	AC100-277V		AC100-277V	
Frequency	50/60Hz		50/60Hz	
PF	>0.9		>0.9	
Wire Connection	Two Ends Powered		Two Ends Powered	
Material	6063Aluminum+PC		6063Aluminum+PC	
IP Rate	IP40		IP40	
Working Temperature	-20~55°C		-20~55°C	
Storage Temperature	-40~60°C		-40~60°C	
Lifespan	50000h		50000h	
Warranty	3 Years		3 Years	
Certificates	CE RoHS		CE RoHS	

GL LED LLC

Luminous Intensity Distribution

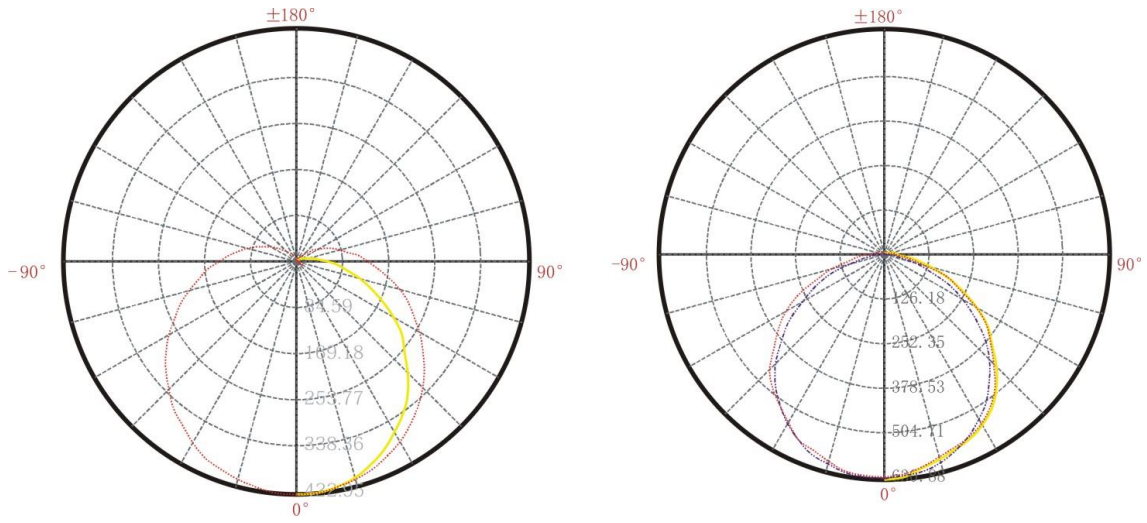

Luminous intensity distribution
(unit: cd)


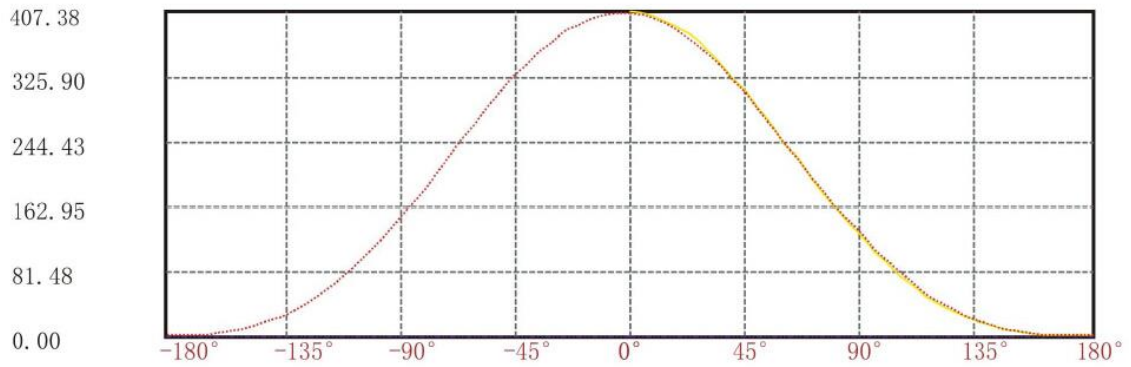


C20(Max) :

C90/C270:

Spectrogram

GL LED L
Tel: 312-600-9:

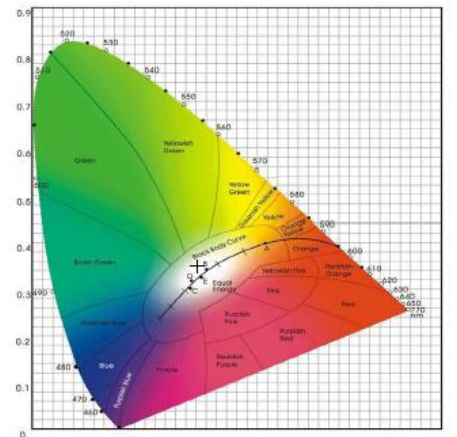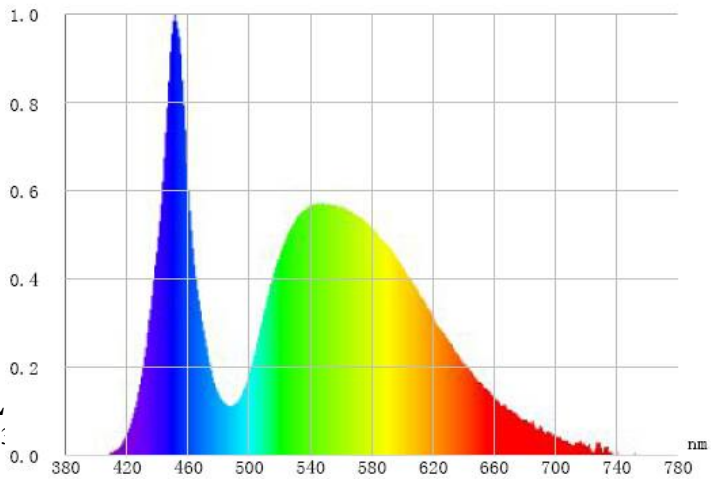


com


GL LED LLC

Size Diagram


FA8

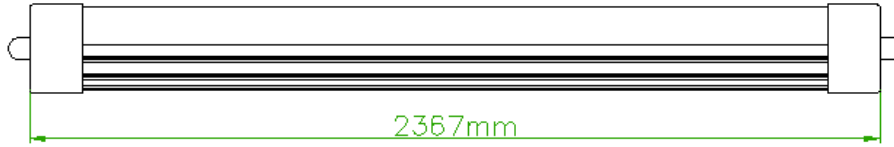

G13

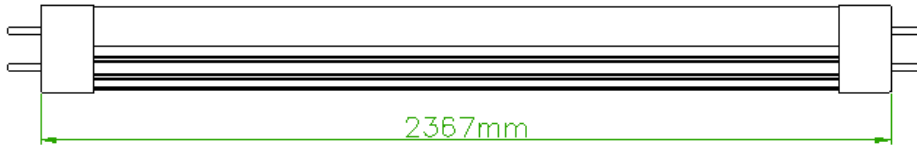


R17D

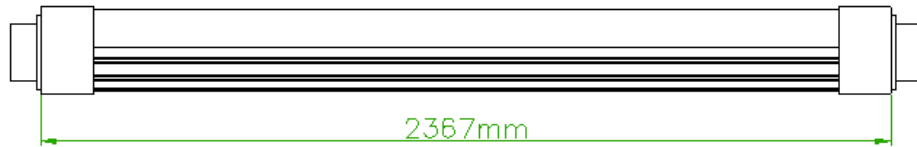

End cap	Body Length(without pin)
FA8	2367mm
G13	2367mm
R17D	2367mm


Installation Guide

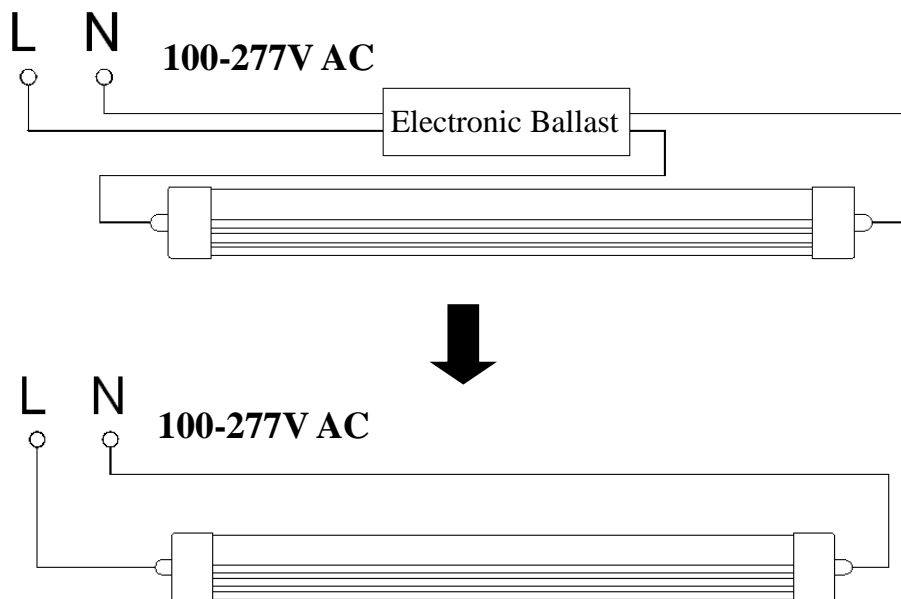

GL LED LLC

1. Turning off the electricity.
2. For electronic fixture, remove or bypass the ballast and then put the LED tube on.
3. Rotating the LED tube in the right light angle.

Packing Information

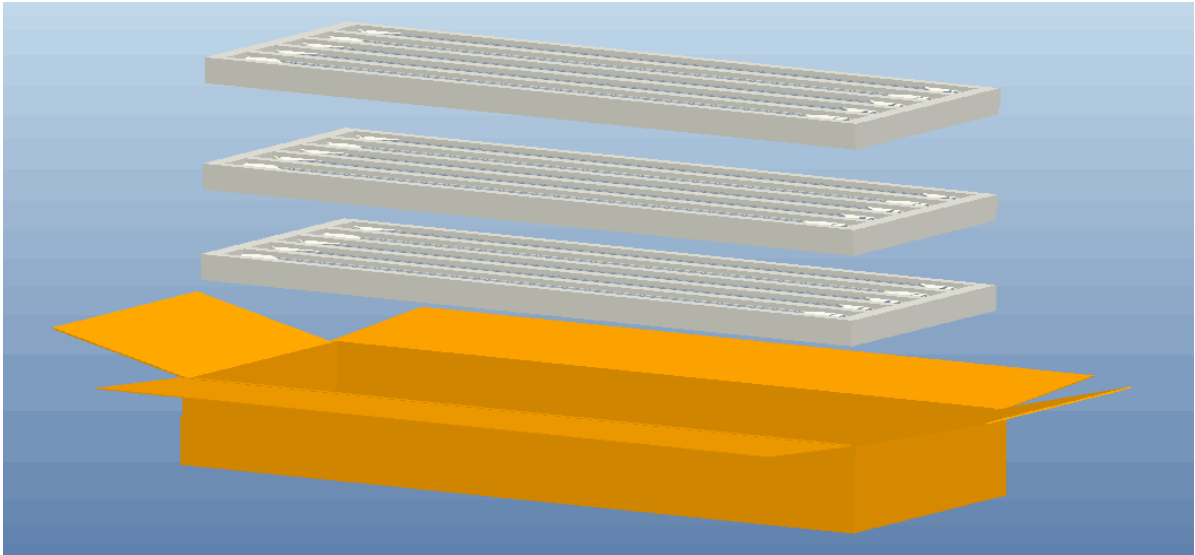

tem	Carton Size	N.W.	G.W.	PCS/CTN
8' tube light	2462x213x135mm LxWxH	9KGS	12.7KGS	15pcs

Notice

1. Cutting off the electricity before installation.
2. Installation can only be done by qualified electrician.
3. Input voltage is AC100-277V. Pls kindly confirm the voltage before installation.
4. If the tube can't work normally, pls contact our customer service.
5. It will be out of warranty if damage is caused by personal mistake.

GL LED LLC

Tel: 312-600-9363

Email: sales@gledllc.com

Address: 501 W 18TH St. Chicago 60616

Website: www.Gledllc.com