




Features

1. UL DLC FCC approved.
2. High efficacy: 110lm/W for frosted PC cover, 110lm/W for clear PC cover.
3. High CRI, over 80.
4. Stable driver with PF over 0.99.


Parameter

Model No.	TP-T84FP22W	
Size	Dia.26*1200mm	
Wattage	22W	
LED Qty	120pcs	
LED Type	SMD 2835	
Luminous Flux	Frosted	2200lm \pm 10%
	Clear	2420lm \pm 10%
CRI	>80	
CCT	4000K/5000K	
Lighting Angle	180 Degree	
Input Voltage	AC100-277V	
Frequency	50/60Hz	
PF	>0.99	
Wire Connection	One End Powered	
Material	Aluminum+PC	
IP Rate	IP40	
Working Temperature	-20~55°C	
Storage Temperature	-40~60°C	
Life Span	50,000h	
Warranty	5 Years	
Certificates	UL, DLC	

Luminous Intensity Distribution


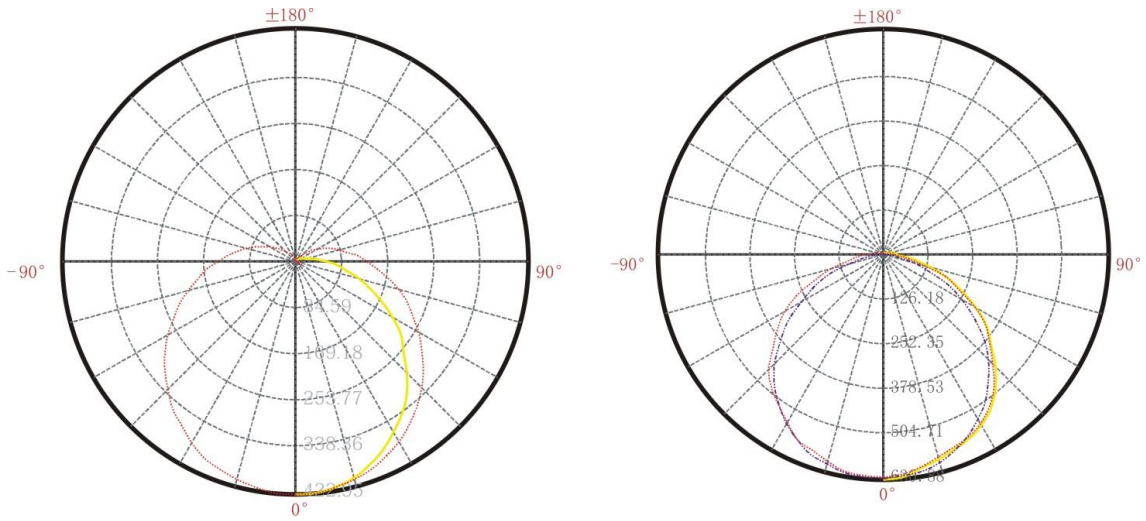


Luminous intensity distribution
(unit: cd)

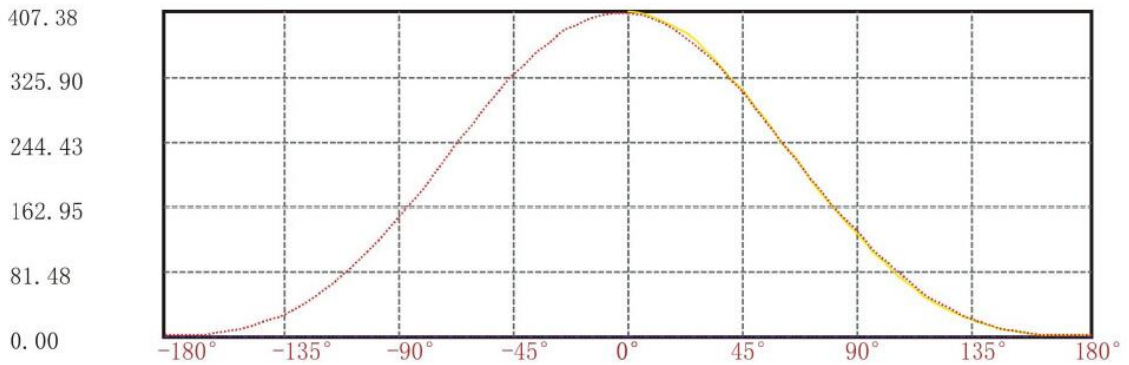


C20(Max) : ————
 C0/C180 :
 C90/C270 : - - - - -

Spectrogram

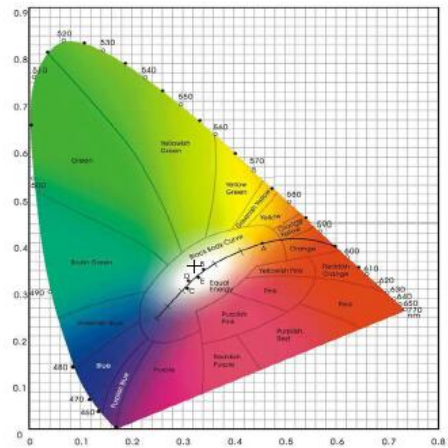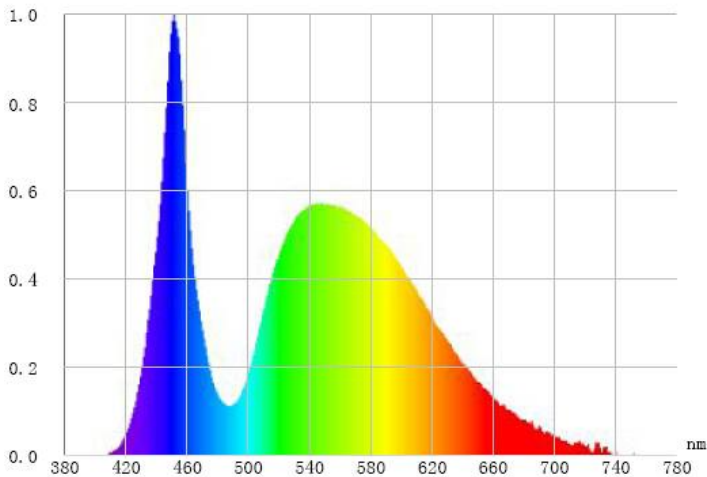

Size Diagram

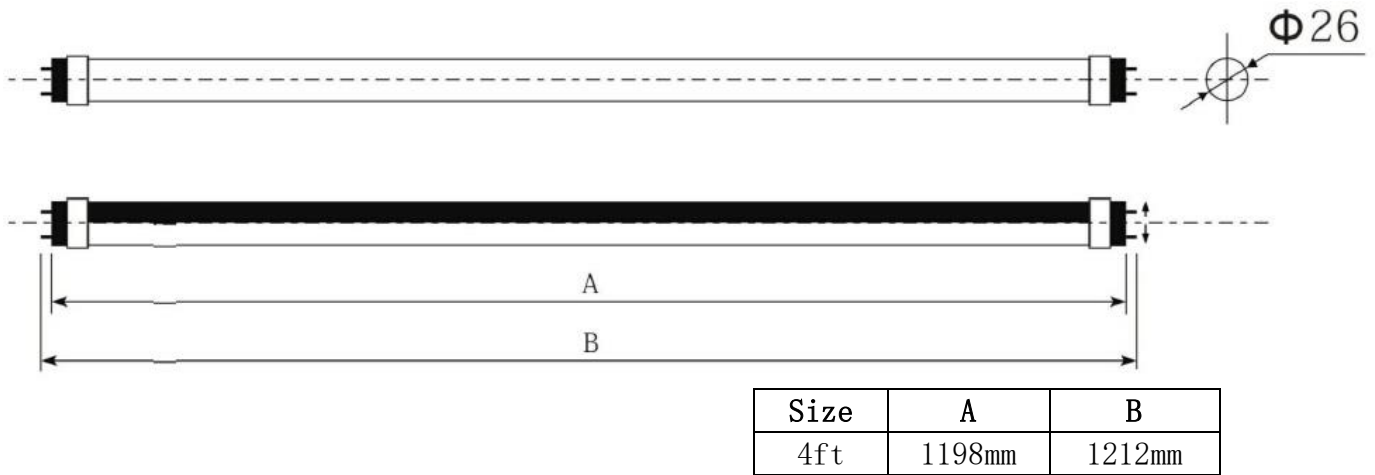

Installation Guide

AC 100-277V



fluorescent tube




AC 100-277V



Bypass ballast

LED tube

AC 100-277V

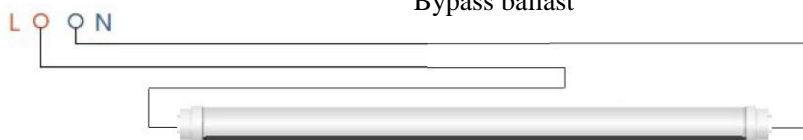


Bypass ballast

GL LED LLC

1. Turn off the electricity.
2. Remove the fluorescent tube.
3. Remove or bypass the ballast and then put the LED tube on.
4. Rotate the LED tube in the right light angle.

Packing Information

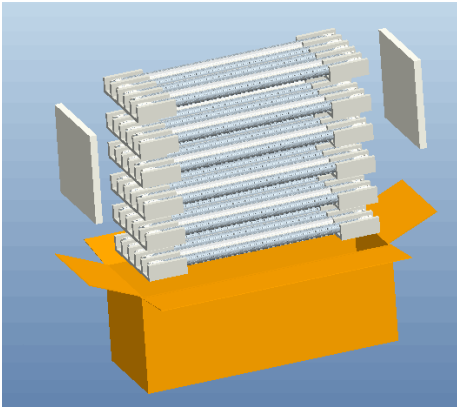

Size	Carton Size	N.W.	G.W.	PCS/Carton
4ft	9"W x 9"H x 49.5"L	12LB	15LB	25pcs

Notice

1. Cut off the electricity before installation.
2. Installation can only be done by qualified electrician.
3. Input voltage is AC100-277V. Please kindly confirm the voltage before installation.
4. If the tube can't work normally, please contact our customer service.
5. It will be out of warranty if damage is caused by personal mistake.