



In Situ Temperature Measurement Test Report

For

GL LED LLC

5F, Bld 5, Ji 'AnTai Hi-tech Park, Fuqiao 1st Zone, Qiaotou of Fuyong, Bao'an District, Shenzhen 518103, China

2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces

Model name(s): GL-PL-24-50W

Representative (Tested) Model: GL-PL-24-50W (3500K)

Model Different: N/A

Test & Report By:

Garman Mo

Engineer: Garman Mo Date: Sept 13,2016 Review By:

Towny Liang

Manager: Tommy Liang

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.





Table of Contents

1 Ge	neral	3
	1.1 Product Information	3
	1.2 Standards or methods	4
	1.3 Equipment list	
	2.1 Ambient Condition	4
	2.2 Temperature Stabilization	4
	2.3 Thermocouples	5
	2.4 Thermocouples contact	
	3.1 Data:	6
	3.2 Test Photo:	6





1 General

1.1 Product Information

Brand Name	GL LED		
Model Number	GL-PL-24-50W		
Luminaire Type	2x4 Luminaires for Ambient Lighting of Interior		
	Commercial Spaces		
Nominal Power	30W		
Rated Initial Lamp Lumen	*		
Declared CCT	3500K,4000K,4500K,5000K		
LED Manufacturer	EVERLIGHT ELECTRONICS CO., LTD		
LED Model	67-21S Series (3000K)		
Sample Receipt Date	Sept.04,2016		
Sample Number	GZE160848-D1		
	Photo		
	T HOLD		





1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/UL 1598:2008	Luminaires

1.3 Equipment list

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
PF210	Power Meter	2016-07-01	2017-06-30
ST-R-181A	Temperature Tester	2016-07-01	2017-06-30

2 Test conducted and method

2.1 Ambient Condition

Test was conducted in an ambient temperature of 25 ± 5 °C. Ambient temperature variations above or below 25 °C was subtracted from or added to temperatures recorded at points on the luminaire.

The ambient temperature was measured by a thermocouple which was immersed in 15ml of mineral oil in a glass container.

2.2 Temperature Stabilization

Temperatures were measured after they have stabilized when the test has been running for a minimum of 7.5 hours, or the test has been running for a minimum of 3 hours and three successive reading taken at 15 minutes intervals are with 1° C of another and are not rising.





2.3 Thermocouples

Type J thermocouple was used for temperature measurement. The thermocouple was 0.05mm2(30AWG), and complied with the requirements specified in ASTM MNL 12 and limits of error specified in NIST ITS 90 and ISA MC96.1.

2.4 Thermocouples contact

Thermocouples were in contact with the TMP LED location described in LM-80 test report. In order to gain the maximum temperature, if appropriate, more than one thermocouple were contact in these locations. For details information, please refer to clause 3.3 for the photo of thermocouple contact.





3 Test Results


Test date		2016-09-05	Т	est Ambient	25.1 ℃
Samp	le No.		LED Package Model		
GZE160)848-D1		67-21S Series (3000K)		
LED driver of Each La	LED driver of Each Lamp Output voltage				orking current (Max.) mA
1	1 34.4				38.3

3.1 Test Data In:

Input	Vol.	120.0V	Input Curr	ent	0.4	404A	Input Wa	/attage 52.52V		V I	Temperature abilization time:	500 min
No.	Т	Temperat	ture (°C)	No.			Temperature (°C)			No.	Tempera	ture (°C)
	Measured Corrected at 25°C			Measured		Corre	ected		Magazinad	Corrected		
			at 25°C			Measureu		asureu	at 2	25°C		Measured
1	49.5		49.4	3		52.7		52.6		5	51.2	51.1
2	51.8		51.7	4		48.8		48.7		6	50.6	50.5
The h	ighest	in-situ m	easured temp	eratu	ıre L	.ED is 5	52.6°C					

3.2 Test Photo:


Ts Position:




Thermocouple Location on Temperature Measurement Point (TMP):

Laboratory: Standard-Tech Co. Ltd Testing Center NVLAP CODE: 201011-0





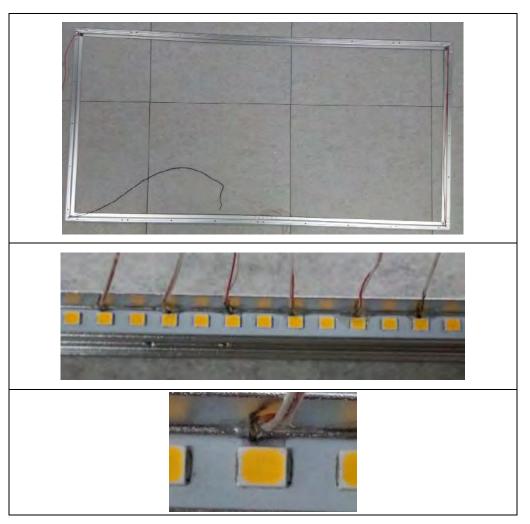

Results

Time (t) at which to estimate lumen maintenance (hours):	50,000
Lumen maintenance at time (t) (%):	87.20%
Reported L70 (hours):	>54000

Results

Time (t) at which to estimate lumen maintenance (hours):	36,000
Lumen maintenance at time (t) (%):	91.03%
Reported L90 (hours):	40,000

Laboratory: Standard-Tech Co. Ltd Testing Center NVLAP CODE: 201011-0






3.3 Test Data of LED Driver:

Input	Vol.	120.0V	Input Cu	rrent	0.4404A	Input W	/attage	52.52W	Temperature stabilization time:	500 min
No	Measured TC Temperature (°C)						Temperature Limited of Life ≥ 50000 hours			
INO		Measure	d	Co	orrected at 2	25°C				
1	53.4 53			53.3				55		

3.4 Test Photo:

Thermocouple Location on Temperature Measurement Point (TMP):

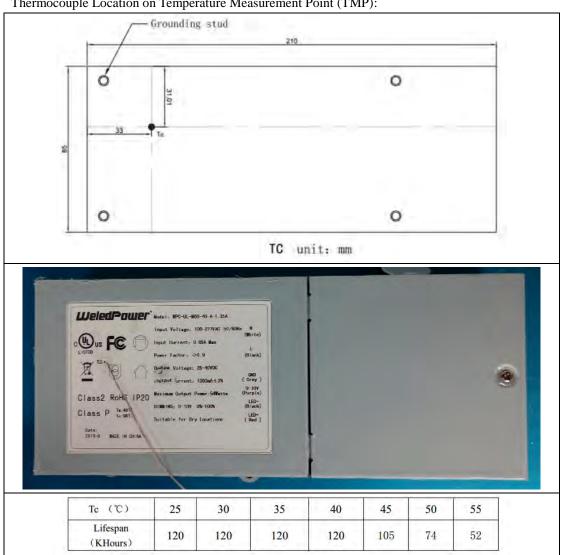





***** END OF THE TEST REPORT*****