RODENHOUSE _______ Fastening Systems _____

THERMAL-GRIP® ci PRONG WASHER

Continuous Insulation

Attachment

Air Barrier Performance



THERMAL-GRIP® ci PRONG WASHER

Large 2" diameter solid cap washer attaches rigid insulation and helps seal against air / moisture penetration through the weather barrier assembly.




LABOR-SAVING PRONGS

Dual prongs enable pre-spotting for **on-the-wall** screw assembly. Flexible perimeter flattens without tearing insulation facer.



GRIP-DECK® ci SCREWS

Self-drilling or HiLo thread screws with ceramic coating for corrosion resistance. Use Grip-Lok® Autofeed Fastening System for rapid attachment.

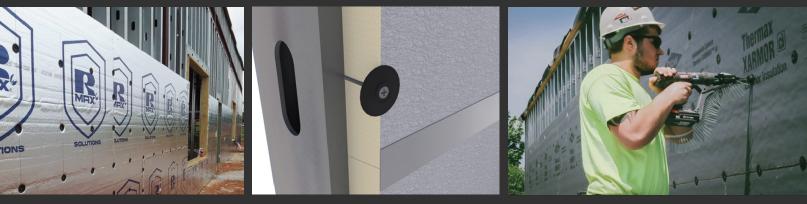



THERMAL-GRIP®

ci PRONG WASHER



• UV Inhibitor for exposure during course of construction.

• 2" dia. solid plastic cap design for air-barrier performance.

• Stiffened center ring prevents screw pull-through.

• Flexible perimeter flattens without tearing insulation facer.

• Optional use with Grip-Lok® Autofeed Fastening System with Bullseye® nose adaptor.

• Use with Grip-Deck® ci ceramic coated screws.

• Attaches ALL types of rigid insulation and mineral wool.

• Specified, tested or approved by all insulation manufacturers





*Use with Grip-Lok® Autofeed Fastening System with Bullseye® nose adaptor

