



NARDINI

INSTALLATION INSTRUCTIONS FOR NARDINI TOILET SUITES

Nardini toilet suites have S-Trap waste outlet connections and bottom-entry water inlets.

Before installation, a visual check of the suite should be undertaken. The pan, seat and pan fixings come in one box and the cistern and valves are in a separate box. Ensure that nothing is damaged or missing.

The drawings on the back of this installation document show the “set-out” for the Nardini pan. The set-out is 140mm from the finished wall to the centre of the waste outlet.

SETUP :

1. Establish the rough in positions for the waste outlet and the holes for the pan fixing brackets (see drawing overleaf).
2. Prepare the waste outlet according to the required set-out of 140mm.
3. Drill the holes in the floor for the fixing brackets, ensuring that they are 40mm inside the traced outline of the pan. (see separate instructions accompanying the bracket).

The installation of this toilet suite should be undertaken by a qualified and licensed plumber and in accordance with the National Plumbing Code AS/NZS 3500.2 Harmony sanitaryware products are designed to meet the appropriate Australian standards

For further information, visit www.harmonybathroomware.com.au

S-Trap Installation:

Suits Models:

HARMONY10000 (Fig. 1)

1. Fix a pan collar (not supplied) to the waste outlet.
2. Carefully lift the pan and insert firmly into the bottom of the S-trap into the pan collar.
3. Bolt the cistern to the pan, and flush it with a bucket of water to ensure there are no leaks.
4. Attach a flexible connector from the water outlet on the wall to the inlet at the base of the cistern.
5. Fill the cistern and ensure that water is at the correct level. Any minor adjustments should be in line with the instructions accompanying the inlet valve.

FINAL STEPS:

1. Ensure the toilet suite is level and that the cistern is square to the wall.
2. Attach the cistern to the wall.
3. Attach the seat according to the separate instructions.
4. Fix the pan to the floor using the screws and caps provided.
5. Silicone the suite to the floor and remove any excess.
6. Flush the toilet (both half flush and full flush) to ensure it is functioning correctly.

CARE AND MAINTENANCE:

1. Clean the toilet suite with liquid detergent and a damp cloth.
2. Do not use water additives, or place them in the cistern.


www.harmonybathroomware.com.au

NARDINI

Close-Coupled Toilet Suite

(Fig. 1)

HARMONY10000

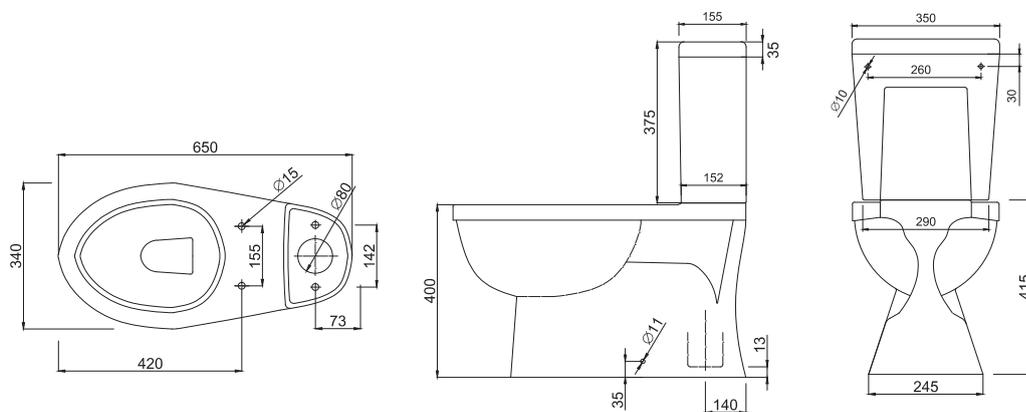

For further information, visit www.harmonybathroomware.com.au

Disclaimer: Dimensions and set-outs contained in these instructions are correct at the time of publication. However, neither the manufacturer nor the distributor takes responsibility for printing errors. The manufacturer and the distributor reserve the right to vary specifications or delete toilet suite models without prior notification. A failure to follow these instructions, or a failure to have the product installed by a licensed tradesperson, may void the product's warranty.