




SPIT C6



→ C6-20



→ C6-25 ; C6-30
C6-35 ; C6-40

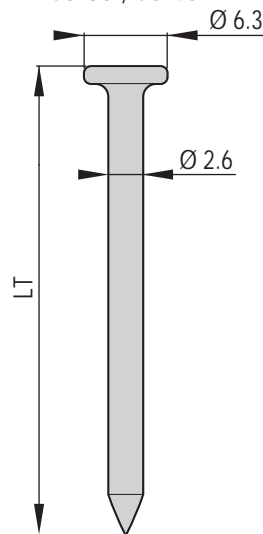

DESCRIPTION

→ Using with wiring accessories, to fix drywall track.

PROPERTIES MATERIAL

Shank in carbon steel

- Total length Lt : 20, 25, 30, 35 or 40 mm
- Electrogalvanised, min zinc coating 5 µm
- Hardness (C6-20) : 53 to 56 HRc
- Hardness (C6-25/30/35/40) : 50 to 55 HRc

TOOLS

P700 E - P700 P

AGREEMENT

CSTB Technical approval 3/06 - 460

ACCESSORIES

Magnetic nozzle pieces for:

→ Fixing Metal latch



→ Metal P-CLIP




→ Other accessories

- Wiring accessories for electrician & Plumber
- Pirelli FIREFIX for fire resistant cabling
- Threaded rod hanger : TRH CLIP



NAIL LENGTH SELECTION

C6 range	Length (LT)	Black strip 500 pcs/box	Black strip 1500 pcs/ box	Flush head nail range * 500 pcs/box
C6-20	20	046310	046410	011225
C6-25	25	046320	046420	011853
C6-30	30	046330	046430	011860
C6-35	35	046340	046440	-
C6-40	40	-	-	046350

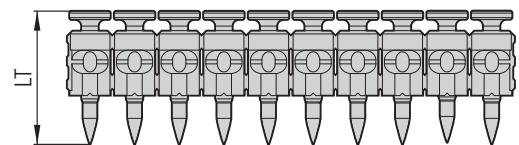

* : leaves no plastic residue after fixing

RECOMMENDED LOAD

C6 range		Characteristic resistance		Recommended load	
		N _{Rk} (kN)	V _{Rk} (kN)	N _{Rec} (kN)	V _{Rec} (kN)
 C20/25 to C30/37	H _{nom} ⁽¹⁾ = 15 mm	0.87	0.75	0.30	
	H _{nom} ⁽¹⁾ = 18 mm	1.19		0.40	
	H _{nom} ⁽¹⁾ = 20 mm	1.41		0.47	

(1) Embedment depth
H_{nom} = 15-20 mm is recommended

L = H_{nom} + t_{fix} (see p. 13)