

## 2012-2016 Porsche 981 GTS Front Radiator Grill Installation Procedure




*Note: it is best to protect your paint with painter's tape during the installation procedure. Though not necessary if care is taken.*



## Procedure

---

1. The GTS installation is relatively simple. The Passenger side is more difficult due to the placement of the temperature sensor. For the Driver's side, simply feed the grill into the radiator cavity. Utilize the cable tie to help pull the grill into position. You can also utilize a small hook tool to pull the left side of the grill to ensure the edge of the grill is hidden behind the bumper cover. Loop the cable tie through the center clip on the center rib. The receiving end should be between the grill and the rib (arrow shows where the receiving end is). Once positioned side to side, pull cable tie tightly and clip off the end.

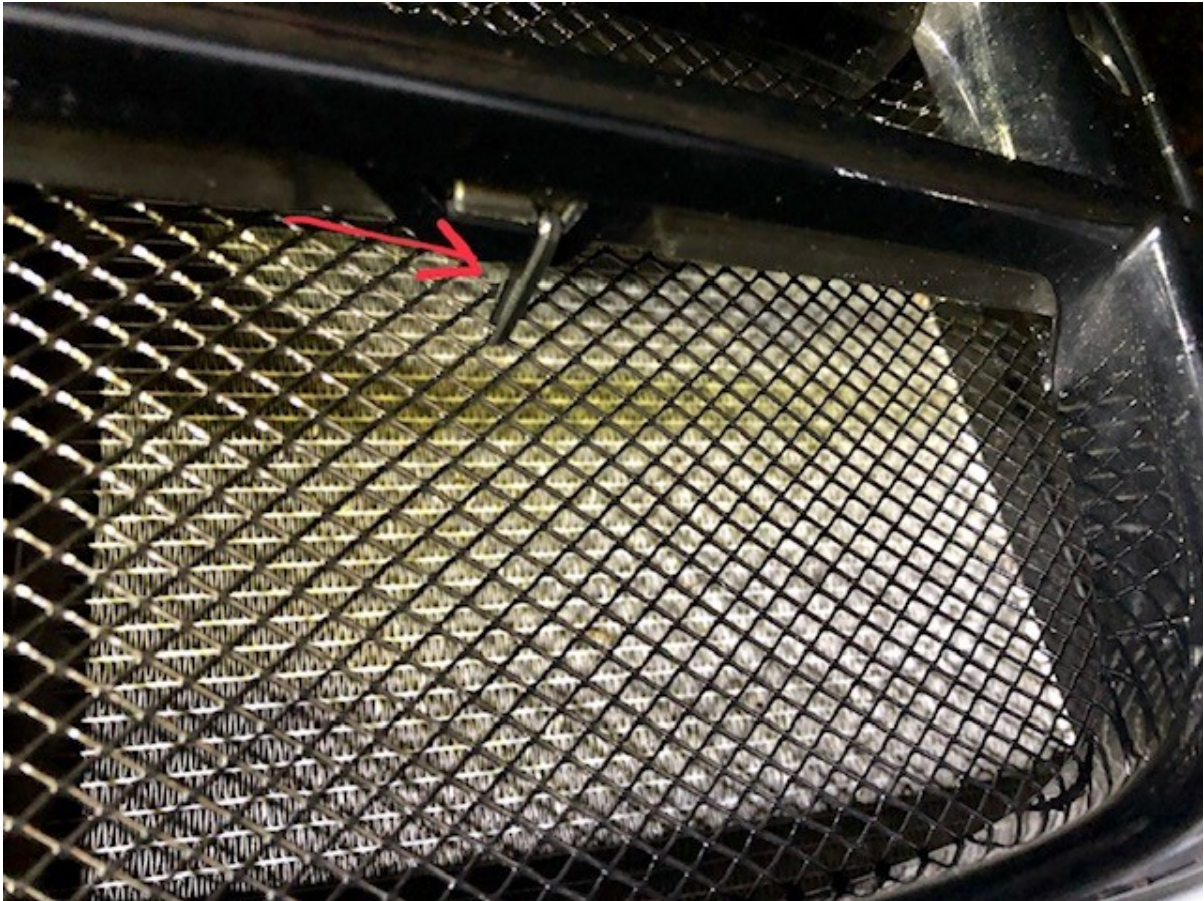

2. Passenger side: the passenger side is slightly more difficult to get the grille seated towards the center of the car behind the bumper/grille cover area. You will need two tools for this step, a hook tool to pull the grille and a piece that is plastic or other soft material that can fit through the grille holes.
  - a. As the grille is slid into position, you will need a small tool, we suggest plastic and small enough to fit through the grille holes. Utilizing the tool, push lightly against the temperature sensor tip, be careful as it is plastic. Just enough pressure to get the sensor to go behind the grille. Utilize the hook tool to pull the grille. You may need to do this multiple times, one hole at a time, to get the grille in position.
  - b. Then loop the cable tie through the clip hole and tighten as in the step above with the receiving end in between the clip and the grille.
3. Complete! Please send photos of the install to [radiatorgrills@gmail.com](mailto:radiatorgrills@gmail.com)!

