



## Desktop 4 LAN Ports Network Appliance with Intel® Celeron® J1900 Processor

Front View

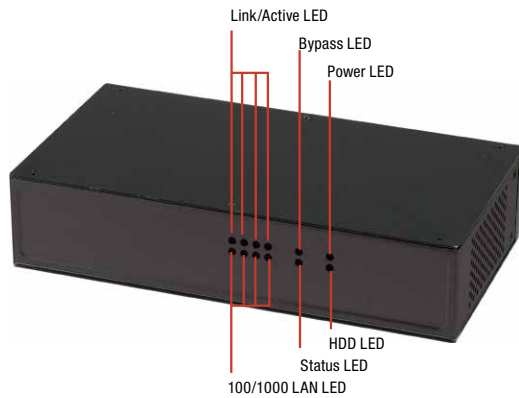

Rear View

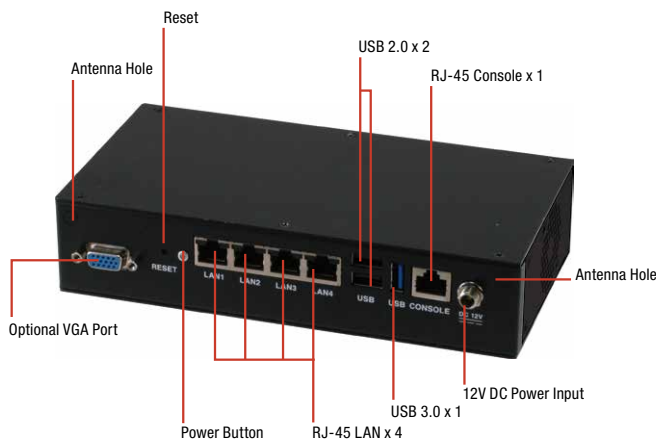

## Specifications

Platform	
Form Factor	Desktop 4-Port Network Appliance
Processor	Intel® Celeron® J1900 2.0 GHz (Quad Core)
Chipset	—
System Memory	204-pin Dual channel DDR3L 1333MHz SODIMM x 2, up to 8GB
Network	
Ethernet	Intel® i211, Gigabit Ethernet x 4
Bypass	Supports 1 pair bypass function
Display	
Graphic Controller	Reserve internal VGA pin header x 1
Connector	—
Storage	
HDDs	2.5" HDD Bay x 1
CF/CFast/mSATA	CF socket x 1

## Features

- Intel® Celeron® J1900 Processor
- 204-pin Dual-channel DDR3L 1333MHz SODIMM x 2, Up to 8 GB
- 10/100/1000Base-TX Ethernet Port x 4
- 2.5" HDD Bay x 1
- CompactFlash™ socket x 1
- Mini-Card Slot x 1
- RJ-45 Console x 1, USB 3.0 x 1, USB 2.0 x 2



## Expansion/Internal Interface

PCIe slot	—
Mini-PCIe slot	Mini-Card Slot x 1 (Half size)
Keyboard and Mouse	Reserve pin-header
Universal Serial Bus	USB 2.0 x 2, USB 3.0 x 1

## Miscellaneous

RTC	Internal RTC
Watchdog Timer	1~255 steps by software programmable
Software Button	GPIO Programmable push button x 1
TPM	—
GPIO	—
FAN	Fanless
MTBF (Hours)	—
Color	Black

## Environmental Parameters and Dimension

Power Requirement	12V DC power in connector/ 40W Power adapter x 1 4-pin DC power out connector for HDD x 1
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Storage Temp.	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10%~80% relative humidity, non-condensing
Storage Humidity	10%~80% @40°C, non-condensing
Vibration	0.5 Grms/ 5 ~ 500Hz/ operation (2.5" HDD) 1.5 Grms/ 5 ~ 500Hz/ non-operation
Shock	10 G peak acceleration (11 m sec. duration), operation 20 G peak acceleration (11 m sec. duration), non-operation
Chassis Dimension (W x D x H)	7.87" x 4.09" x 1.73" (200mm x 104mm x 44mm)


## I/O Interfaces

Front Panel	- Power LED x 1 - Status LED x 1 - HDD Active LED x 1 - LAN LED x 8
Rear Panel	- 12V DC Power Input x 1 - Power Button x 1 - USB 3.0 x 1 - USB 2.0 x 2 - RJ-45 LAN x 4 - RJ-45 Console x 1 - Software Programmable Button x 1 - VGA Port x 1 (Optional)

# FWS-2252

## Dimension

Unit: mm

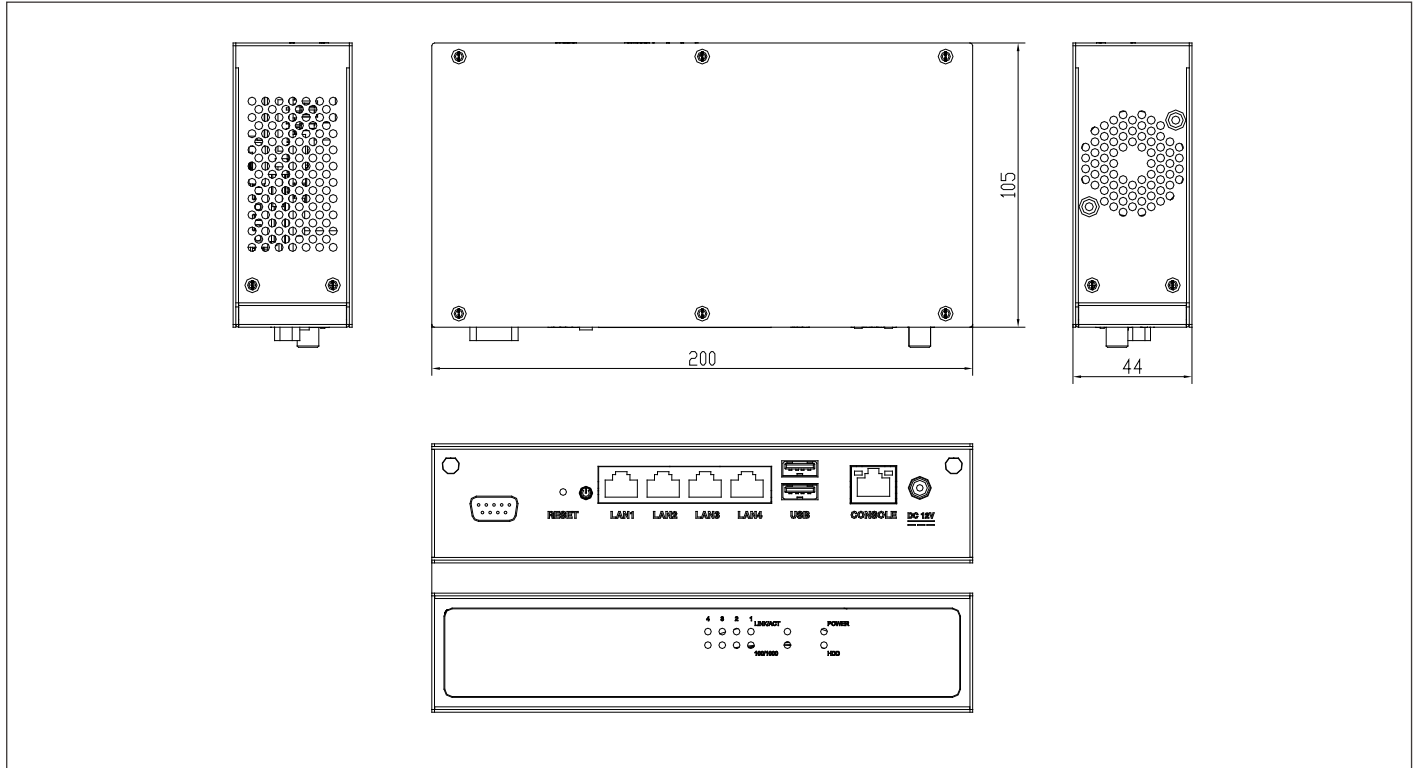

## Ordering Information

Part Number	CPU	Memory	Bypass	Mini-Card Slot	Storage	LAN	USB	Console	System Fan	TPM	Display	Mounting	Power
FWS-2252E4-A10-A10-00	Intel® Celeron® J1900	DDR3L, SODIMM Dual-Channel	1 Pair	1 half size	2.5" HDD Bay x 1 CompactFlash™ socket x 1	4	USB 2.0 x 2 USB 3.0 x 1	RJ-45 x 1	1	—	—	Desktop	DC

## Packing List

- Power Adapter
- FWS-2252

## Optional Accessories

- **1700091805**  
Console Cable
- **1702031802**  
Power Cord, 3P-250V/10A, 180D, 1.8M, USA, YP22/YP12
- **1702031803**  
Power Cord, 3P-250V/10A, 180D, 1.8M, VDE, YP22/YP12
- **170203180B**  
Power Cord, 3P-250V/10A, 180D, 1.8M, China, YP-03/YC-12
- **170203180E**  
Power Cord, 3P-125V/7A, 1.8M, PSE, YP12/YC-12
- **1709150151**  
VGA Cable