



1U Rackmount 4 LAN Ports Network Appliance with Intel® Atom™ Processor SoC

Front View

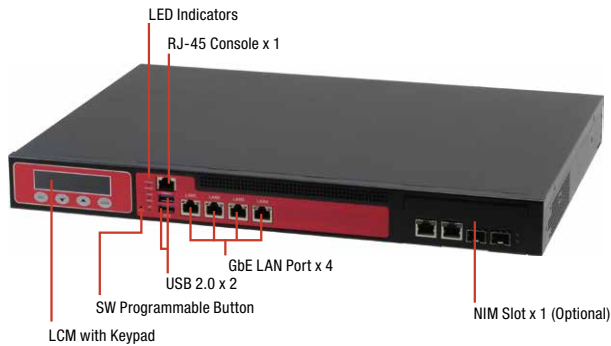

Rear View

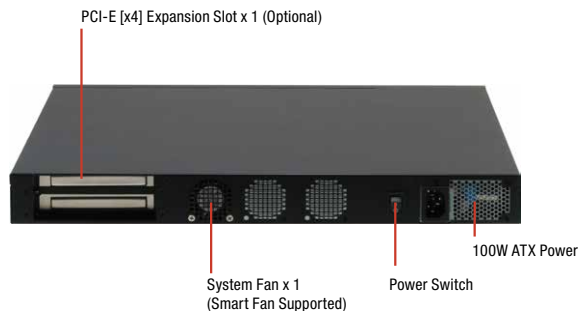

Specifications

Platform	
Form Factor	1U Rackmount Network Platform
Processor	Onboard Intel® C2758/C2558 4-Core/ 8-Core 2.4 GHz Processor SoC
Chipset	Integrated
System Memory	DDR3L 1600 UDIMM/ECC, up to 64GB, 240-pin DIMM x 4
Network	
Ethernet	1GbE x 4 + NIM
Bypass	2 ~ 4 (Depends on NIM)
NIM Slot	1
Display	
Graphic Controller	Mini-card VGA (Optional)
Connector	VGA cable (Optional)

Features

- 1U Rackmount 4 LAN Ports Network Appliance
- Onboard Intel® C2758/C2558 4-Core/ 8-Core 2.4 GHz Processor SoC
- 240-Pin Dual-Channel ECC or non-ECC DDR3(L) 1600 MHz DIMM x 4, Up to 64 GB
- Gigabit Ethernet x 4
- Optional Up to 2 Pairs LAN Bypass Function
- 3.5" SATA HDD x 1 or 2.5" SATA HDD x 2 and CompactFlash™ Socket x 1
- RJ-45 Console x 1, USB 2.0 x 2
- NIM Slot x 1
- Optional PCI-E [x4] x 1
- ATX PSU 100W
- Mini-PCIe Slot x 1




Storage	
HDDs	Internal 3.5" SATA HDD x 1 or 2.5" SATA HDD x 2 (Optional)
CF/CFast/mSATA	CF socket x 1
Expansion/Internal Interface	
PCIe slot	PCIe [x4] signal use [x8] slot
Mini-card slot	—
IPMI	—
Keyboard and Mouse	Reserve pin-header
Universal Serial Bus	USB 2.0 x 1 Box Header (2.0mm) (optional)
Miscellaneous	
RTC	Internal RTC
Watchdog Timer	1~255 steps by software programmable
Software Button	GPIO Programmable push button x 1
TPM	—
GPIO	—
FAN	1
MTBF (Hours)	109,000
Color	Black
Environmental Parameters and Dimension	
Power Requirement	100W ATX PSU
Operation Temp.	32°F ~ 104°F (0°C ~ 40°C)
Storage Temp.	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10 ~ 80%
Storage Humidity	10 ~ 80% @ 40°C, non-condensing
Vibration	0.5 Grms/ 5 ~ 500Hz/ operation (3.5" H.D.D) 1.5 Grms/ 5 ~ 500Hz/ no operation
Shock	10G peak acceleration (11 m sec. duration), operation 20G peak acceleration (11 m sec. duration), non-operation
Chassis Dimension (W x D x H)	16.93" x 12.01" x 1.73" (430mm x 305mm x 44mm)
I/O Interfaces	
Front Panel	- Power LED x 1 - Status LED x 1 - HDD Active LED x 1 - LAN ports Link/Active LED x 4 - Bypass LED (Default 2 LEDs) - USB 2.0 Ports x 2 - RJ-45 Console x 1 - Parallel LCM display and 4 keypad x 1 - Software Programmable Switch x 1
Rear Panel	- AC Power Input x 1 - Power Switch x 1 - VGA port (Optional) - Rear Expansion Slot x 2 (Optional PCIe [x4] signal use x8 slot)

FWS-7350

Dimension

Unit: mm

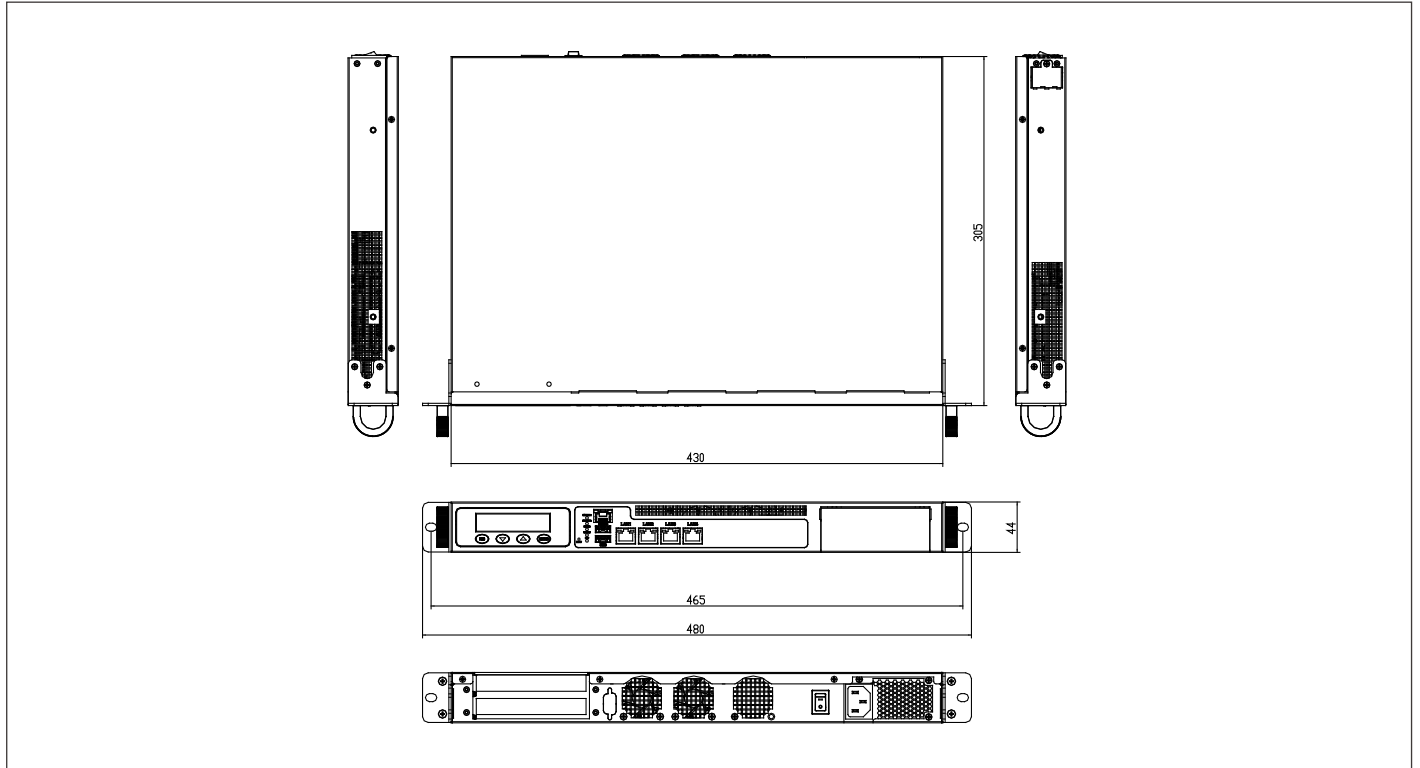

Ordering Information

Part Number	CPU	Memory	Storage	Display	LAN	USB	Console	Bypass	NIM Socket	Expansion Slot	Mounting	Power
FWS-7350E4-H10-A10-000	Onboard Intel® C2758 8 Core™ 2.4 GHz Processor SoC	DDR3L ECC/UDIMM (Up to 64GB)	2.5" HDD Bay x 2	—	GbE x 4	USB 2.0 x 2	RJ-45 x 1	2	1	PCIe [x8] slot x 1 use x4 signal (Optional)	1U Rackmount	ATX
FWS-7350E4-H10-A10-001	Onboard Intel® C2558 4 Core™ 2.4 GHz Processor SoC	DDR3L ECC/UDIMM (Up to 64GB)	2.5" HDD Bay x 2	—	GbE x 4	USB 2.0 x 2	RJ-45 x 1	2	1	PCIe [x8] slot x 1 use x4 signal (Optional)	1U Rackmount	ATX
FWS-7350E4-H10-A10-002	Onboard Intel® C2758 8 Core™ 2.4 GHz Processor SoC	DDR3L ECC/UDIMM (Up to 64GB)	3.5" HDD Bay x 1	—	GbE x 4	USB 2.0 x 2	RJ-45 x 1	2	1	PCIe [x8] slot x 1 use x4 signal (Optional)	1U Rackmount	ATX
FWS-7350E4-H10-A10-003	Onboard Intel® C2558 4 Core™ 2.4 GHz Processor SoC	DDR3L ECC/UDIMM (Up to 64GB)	3.5" HDD Bay x 1	—	GbE x 4	USB 2.0 x 2	RJ-45 x 1	2	1	PCIe [x8] slot x 1 use x4 signal (Optional)	1U Rackmount	ATX

Packing List

- Gift Box (Including Console Cable, Ear Brackets)
- Product DVD
- FWS-7350

Optional Accessories

- **M02666600**
Slide x 2, for Rackmount Usage
- **1702031803**
Power Cord, 3P-250V/10A, 180D, 1.8M, VDE, YP22/YP12
- **1702031802**
Power Cord, 3P-250V/10A, 180D, 1.8M, USA, YP22/YP12
- **170203180E**
Power Cord, 3P-25V/7A, 180D, 1.8M, PSE, YP12/YP12
- **968666618**
Mini-PCIe VGA Module
- **9761781002**
PER-T281, Riser Card for NIM
- **9761781003**
PER-T282, Riser Card for PCI-E [x8] Expansion (use x4 signal)
- **PER-C35L-A10-00**
Fiber module Intel 82599, 10 GbE x 2, Rev. A1.0
- **PER-C36L-A10-00**
Fiber module Intel i210.1 GbE x 4 Rev. A1.0
- **PER-C36L-A10-01**
Fiber module Intel i210.1 GbE x 2 Rev. A1.0
- **PER-C37L-A10-01**
LAN Module Intel i350 1GbE x 8, 2 pairs Bypass Rev.A1.0
- **PER-C38L-A10-01**
LAN Module Intel 82580 1GbE x 8, 4 pairs Bypass Rev.A1.0