


1U Rackmount 7 LAN Network Appliance with Intel[®] Atom[™] C3758 SoC Processor

Front View



Rear View

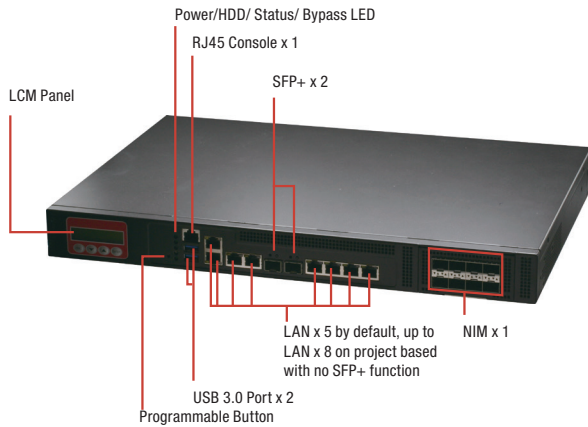

Features

- Intel[®] Atom[™] C3758 SoC Processor, Optional Support up to 16 Core
- DDR4 Slot x 4, Support UDIMM/ECC, up to 64GB
- 5 Copper (2 From 88E1543/ 3 From Intel[®] I211)
- 2 10Gb SFP+ (From CPU)
- Onboard 2 Pairs Bypass
- Mini-Card Socket (Full-Size) x 1, Mini-Card Socket (Full-Size) with SIM Socket x 1 (Optional)
- Internal 2.5" SATA HDD x 2
- LCM with Keypad x 1, RJ-45 Console x 1, USB 3.0 x 2
- 100W Flex ATX PSU
- TPM (Optional)



Internal/ Expansion Interface

PCIe Slot	PCIe [x8] slot x 1, cannot use w/ NIM
Mini-PCIe Slot	Mini-Card socket (full-size) x1, Mini-Card socket (full-size) with SIM socket x 1 (Optional)
IPMI	—
KB Mouse	—
USB	USB 3.0 x 2

Miscellaneous

RTC	Internal RTC
Watchdog Timer	1~255 steps by software programmable
Software Button	GPIO Programmable Button x 1
TPM	TPM v1.2 9660/TPM2.0 9665 (Option)
GPIO	Reserve internal pin header 8-bit Digital I/O interface (4-in /4-out)
Fan	System Fan x 1
MTBF (Hours)	—
Color	Black

Environmental Parameters and Dimension

Power Requirement	100W Flex ATX PSU
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F (-20°C ~ 60°C)
Operating Humidity	10%~80% relative humidity, non-condensing
Storage Humidity	10%~80% @40°C; non-condensing
Vibration	0.5 Grms/ 5 ~ 500Hz / operation (2.5" HDD) 1.5 Grms/ 5 ~ 500Hz / non operation
Shock	10 G peak acceleration (11 m sec. duration), operation 20 G peak acceleration (11 m sec. duration), non operation
Dimension (W X D X H)	430 x 305 x 44mm

I/O


Front Panel	SFP+ with LED x 2 RJ45 Ethernet Port with LED x 5 USB 3.0 x 2 RJ45 Console x 1 Software Programmable Button x 1 Parallel LCM Display and 4 Keypad x 1 LED for Power/HDD/ Status/ Bypass x 5 NIM Slot x 1
Rear Panel	Power Switch x 1 AC Power Input x 1 Rear Expansion Slot x 1

Specifications

System	
Form Factor	1U Rackmount Network Platform
Processor	Intel [®] C3758 SoC Processor, optional support up to 16 core
Chipset	—
System Memory	DDR4 slot x 4, support UDIMM/ECC, up to 64GB
Network	
Ethernet	Marvell [®] 88E1543 RJ45 x 2, Intel [®] i211 RJ45 x 3, SFP+ x 2 from CPU
Bypass	Onboard 2 pairs bypass, others depend on NIM module
NIM Slot	1
Display	
Graphic Controller	—
Connector	—
Storage	
HDD	2.5" HDD Bay x 2
CF/CFast/mSATA	SATA 6.0 Gb/s port x 2

Dimension

Unit: mm

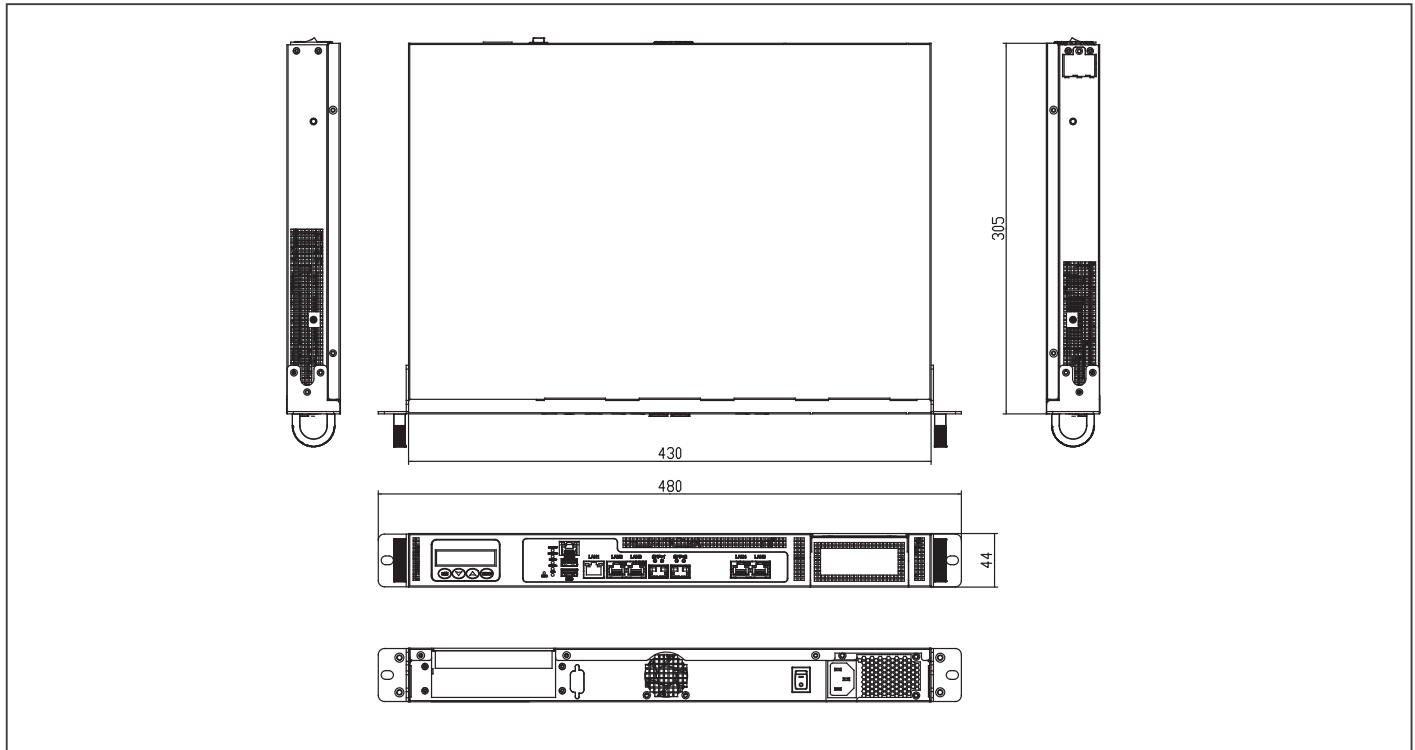

Ordering Information

Part Number	CPU	Memory	Mini-Card Slot	Storage	LAN	USB	Console	Bypass	NIM Slot	Expansion Slot	TPM	Display
FWS-7360E7-A10-000	Intel® Atom® C3758	DDR4 UDIMM/ECC slot x 4	Full Size x 1 (PCIe + USB)	2.5" HDD Bay x 2	RJ45 x 5, SFP+ x 2	USB 3.0 x 2	RJ-45 x 1	2 pairs onboard	1	PCIe [x8] slot x 1, cannot use w/ NIM	—	—

* Please contact AAEON for other optional specifications.

Note 1: Need to configure riser card and module

Note 2: Need to configure riser card

Packing List

- Console Cable
- Ear Brackets
- FWS-7360

Optional Accessories

- **M0266600**
Slide x 2, for Rackmount Usage
- **1702031803**
Power Cord, 3P-250V/10A, 180D, 1.8M, VDE, YP22/YP12
- **1702031802**
Power Cord, 3P-250V/10A, 180D, 1.8M, USA, YP22/YP12
- **170203180E**
Power Cord, 3P-25V/7A, 180D, 1.8M, PSE, YP12/YP12
- **PER-R40X**
NIM LAN Module Riser Card
- **NIM-S26C-A10-T40-0002**
Intel® Fortville XL710 PCI-Express 10G SFP+ 4 Ports Module for FWS-7821
- **NIM-S26B-A10-F20-0002**
Intel® Fortville XL710 PCI-Express 40G QSFP 2 Ports Module for FWS-7821
- **NIM-S13B-A10-G80-0002**
Intel® 82580EB PCI-Express 1G SFP 8 Ports Module for FWS-7820
- **NIM-S13D-A10-G40-0002**
Intel® 82580EB PCI-Express 1G SFP 4 Ports Module for FWS-7820/7821
- **NIM-C13B-A10-G82-0001**
Intel® 82580EB PCI-Express 1G Copper Ethernet 8 Ports Module for FWS-7821 w/ 2Pair bypass
- **NIM-C13D-A10-G42-0002**
Intel® 82580EB PCI-Express 1G Copper Ethernet 4 Ports Module for FWS-7821 w/ 2Pair bypass
- **NIM-S13E-A10-G82-0002**
LAN Module, Intel® 82580EB, 8 x 1GbE SFP, 2 Bypass, FWS-7820/7821, Rev. A.1.0