
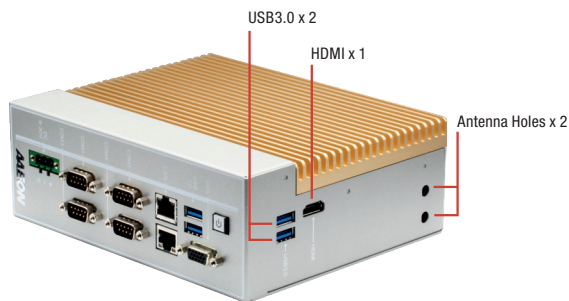


AI@Edge Din Rail Mount Embedded BOX PC with Intel® Core™ i3-6100U or Celeron® 3955U &amp; Two Myriad™ X

Front View

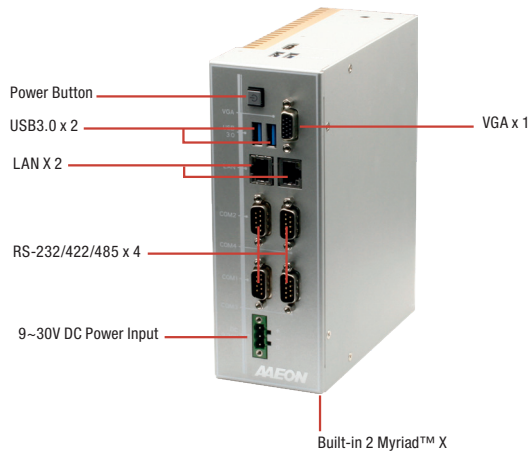

## Features

- Design for AI@Edge application
- Built in Intel® Movidius™ Myriad™ X, support AI computing
- U-Series CPU: Intel® Core™ i3-6100U/ Celeron® 3955U
- DDR4 2133 MHz SODIMM x 1, Memory Max. up to 16GB
- Supports Industrial-grade Intel® GbE LAN x 2
- Supports BIOS Selectable RS-232/422/485 x 4
- VGA + HDMI Dual Display Output
- USB3.0 x 4
- 8-bit Digital Input and Output x 1 (Optional)
- Wide Range DC 9~30V Input With Power Protection
- Din-Rail Mount Design




## Specifications

System	
CPU	Intel® Core™ i3-6100U Intel® Celeron® 3955U
Chipset	Intel® System on Chip
System Memory	DDR4 2133MHz SODIMM slot x 1, up to 16GB
AI Solution	Intel® Movidius™ Myriad™ X x 2
Display Interface	HDMI, VGA
Storage Device	HDD/SSD
Ethernet	10/100/1000 Base-TX x2
I/O	DB-9 x4 for RS-232/422/485 RJ-45 x 2 for GbE (i210IT x 2) USB 3.0 x 4 VGA x 1 HDMI x 1 Antenna Holes x 2 Power Switch Power Input
Expansion	Full-size Mini PCIe slot x 1 (Intel® Movidius™ Myriad™ X) Myriad X 1 Full-size Mini PCIe slot x 1 (Intel® Movidius™ Myriad™ X) Myriad X 2
Indicator	Power LED
OS Support	Windows® 10 (64 bit), Windows® 8.1 (64 bit), Windows® 7 (32/64 bit), Linux
Power Supply	
Power Requirement	9~30V 3 pin DC-in terminal block
Mechanical	
Mounting	DIN Rail Mount Wallmount (Monting kit is optional)
Dimensions (W x H x D)	69mm (W) x 183mm (H) x 155mm (D)
Gross Weight	6.1 lb (2.8kg)
Net Weight	3.9 lb (1.8kg)
Environmental	
Operating Temperature	-15°C ~ 40°C with W.T. SSD/HDD/mSATA (according to IEC68-2-14 with 0.5 m/s AirFlow ; with industrial devices)
Storage Temperature	-49°F ~ 176°F (-45°C ~ 80°C)
Storage Humidity	95% @ 40°C, non-condensing
Anti-Vibration	3 Grms/ 5 ~ 500Hz/ operation – SSD 1 Grms/ 5~ 500Hz/ operation – HDD
Certification	CE/FCC class A

## Dimension

Unit: mm

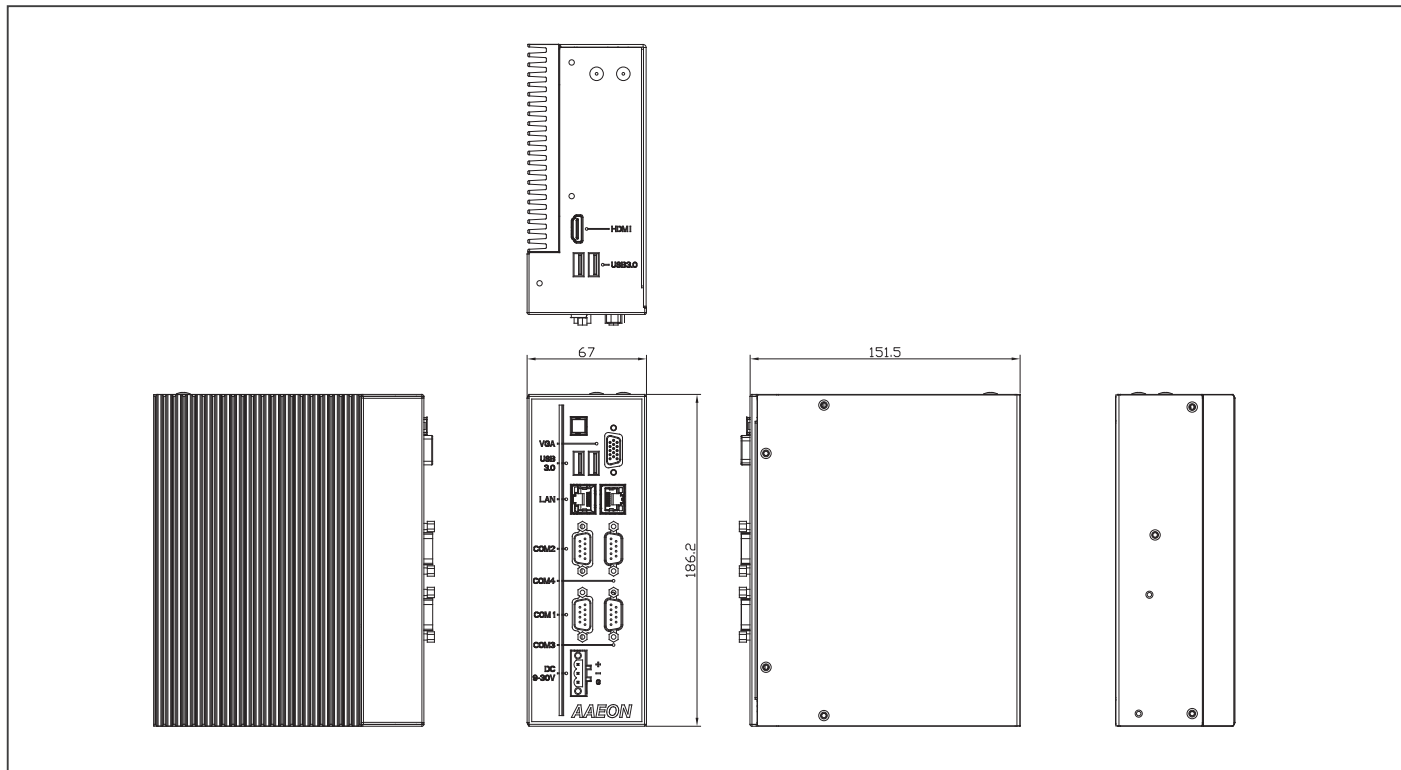

## Ordering Information

Part Number	CPU	RAM	LAN	USB 3.0	USB 2.0	RS-232	RS-232/422/485	Digital I/O	Audio	Storage	Display	Expansion	Mounting	Power	Operation temp.
BOXER-8320AI-A1-1010	Intel® Core™ i3-6100U	—	2	4	—	—	4	—	—	2.5" SATA Drive Bay x1	VGA x1 HDMI x1	Intel® Movidius™ Myriad™ X x2	Din Rail Optional Wallmount	9-30V	-15°C ~ 40°C
BOXER-8320AI-A2-1010	Intel® Celeron® 3955U	—	2	4	—	—	4	—	—	2.5" SATA Drive Bay x1	VGA x1 HDMI x1	Intel® Movidius™ Myriad™ X x2	Din Rail Optional Wallmount	9-30V	-15°C ~ 40°C

## Packing List

- Din Rail Bracket x 1
- Screw Package x 1
- 3 Pin DC-in Power Connector x 1
- BOXER-8320A1

## Optional Accessories

- 1255900841  
84W Power Adapter
- 1702031802  
Power Cord (US Type)
- 1702031803  
Power Cord (Europe)
- 170203180E  
Power Cord (Japan)
- 9741909A00  
Wifi 802.11 a/b/g/n + BT 4.0 Kit
- 9741UC20G0  
3G module Kit
- 9741640404  
Din Rail Mount Kit