



# TES-3162GT-M12-BP1

**EN50155 18-port managed Ethernet switch with 16x10/100Base-T(X) and 2x10/100/1000Base-T(X), M12 connector and 1xbypass included**

## Features

- Leading EN50155-compliant Ethernet switch for rolling stock application
- World's fastest Redundant Ethernet Ring: **O-Ring** (recovery time < 10ms over 250 units of connection)
- **Open-Ring** support the other vendor's ring technology in open architecture
- **O-Chain** support applications with multiple redundant rings topology
- Support standard IEC 62439 **MRP** (Media Redundancy Protocol) function
- STP/RSTP/MSTP supported
- Support **PTP Client** (Precision Time Protocol) clock synchronization
- Support Modbus TCP protocol
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- SNMP v1/v2c/v3 support for secured network management
- RMON for traffic monitoring
- Support VLAN and LLDP protocol
- DHCP assign each Equipment IP by each Port
- Provided Relay bypass function with two gigabit ports
- Event notification through Syslog, Email, SNMP trap, and Relay Output
- Windows utility (**Open-Vision**) support centralized management and configurable by Web-based ,Telnet, and Console (CLI)
- M12 connectors to guarantee reliable operation against environmental disturbances
- Wall mounting enabled



## Introduction



ORing's Transporter™ series managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. The TES-3162GT-M12-BP1 is a managed Redundant Ring Ethernet switch with 16x10/100Base-T(X) and 2x10/100/1000Base-T(X) ports which is specifically designed for the toughest and fully compliant with EN50155 requirement. With completely support of Ethernet Redundancy protocol, O-Ring (recovery time < 10ms over 250 units of connection), Open-Ring, O-Chain and MSTP/RSTP/STP (IEEE 802.1s/w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. Another Open-Ring technology is also supported which can applied for other vendor's proprietary ring. And O-Chain technology is supported which can applied for multiple redundant Ethernet rings. Each TES-3162GT-M12-BP1 switch has 16X10/100Base-T(X) ports. TES-3162GT-M12-BP1 EN50155 Ethernet switch use M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. TES-3162GT-M12-BP1 can be managed centralized and convenient by a powerful windows utility ~ Open-Vision. In

In addition, the wide operating temperature range from -40 °C to 70°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for rolling stock and highly-managed Ethernet application.


## Open-Vision

ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

### Railway Application


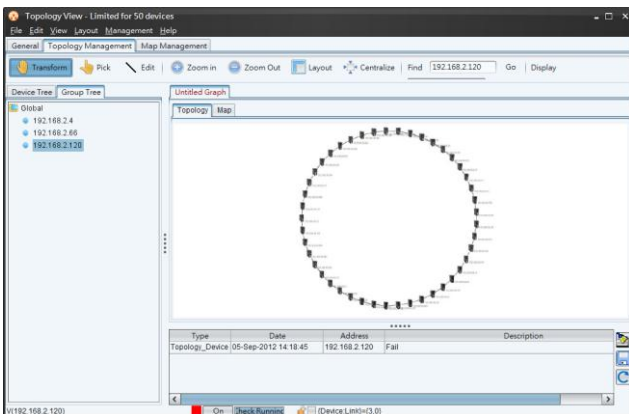
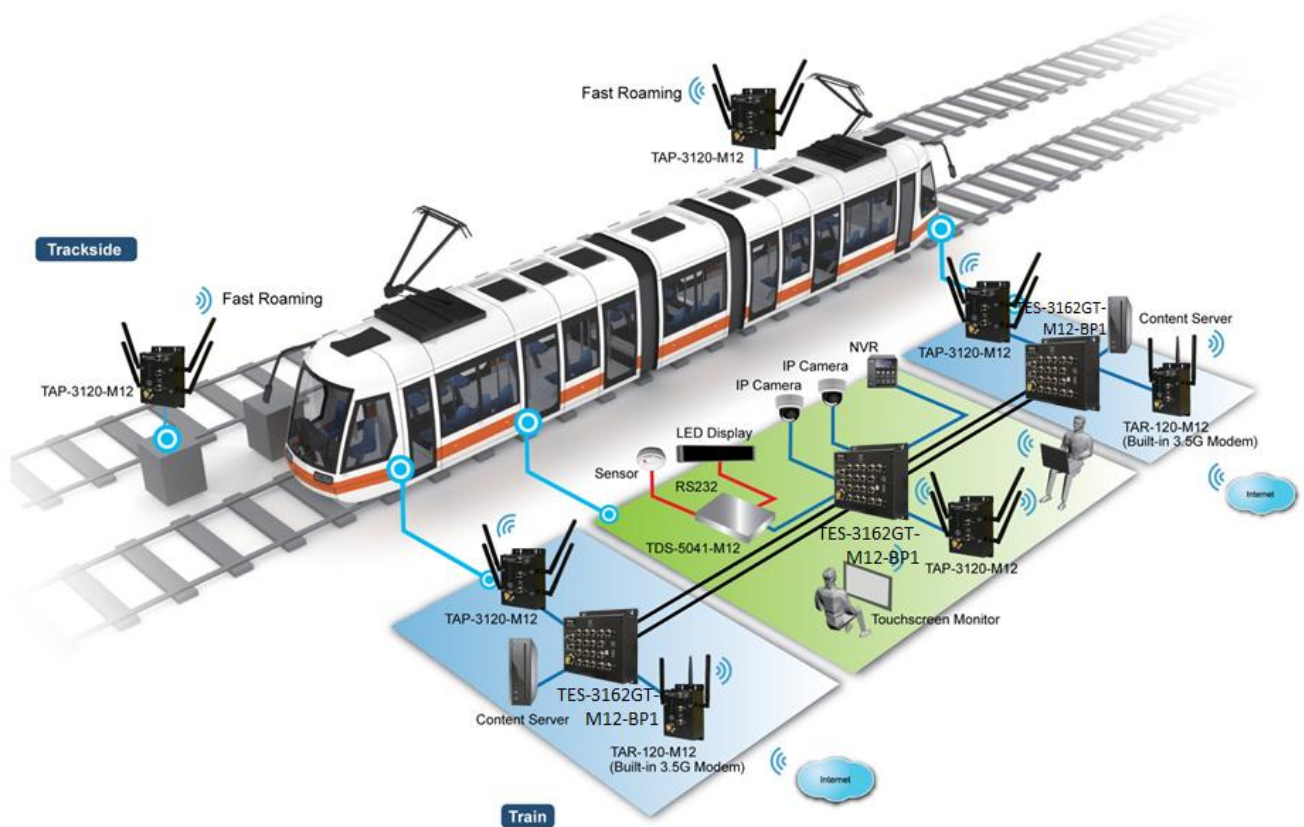


Topology View

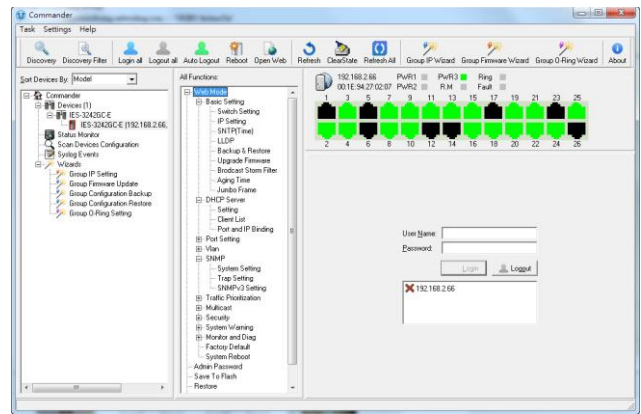


Monitoring and Configuration interface

# Dimension

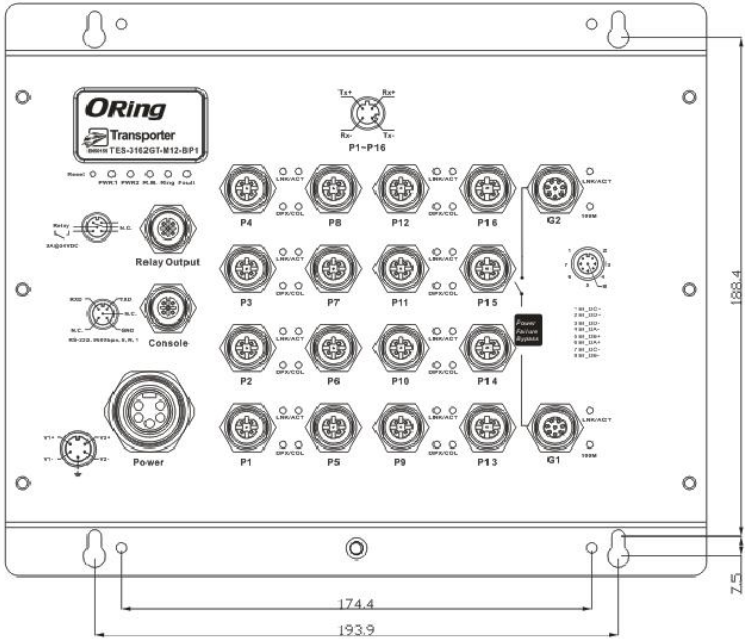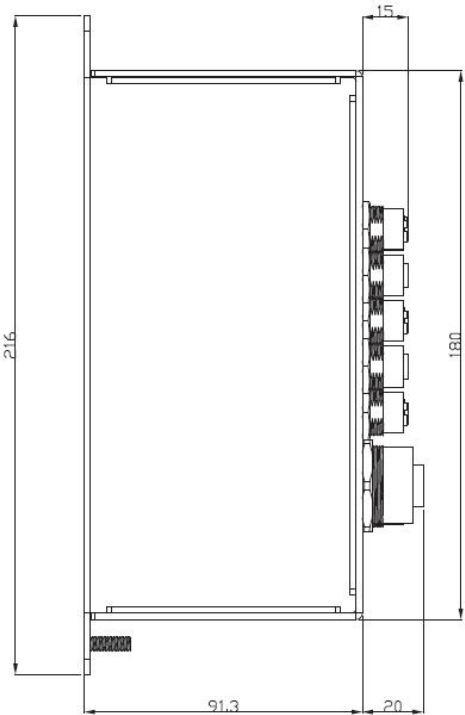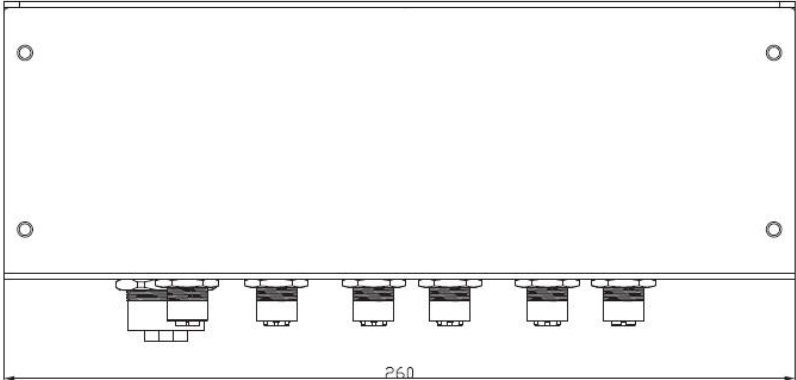

# Pin Definition

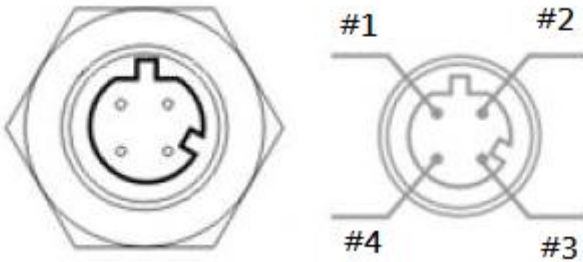

● 10/100Base-T(X) M12 port

| M12 D-coding Pin Definition |             |
|-----------------------------|-------------|
| Pin No.                     | Description |
| #1                          | TX+         |
| #2                          | RX+         |
| #3                          | TX-         |
| #4                          | RX-         |

● 10/100/1000Base-T(X) M12 port



| M12 Pin Definition |             |
|--------------------|-------------|
| Pin No.            | Description |
| #1                 | BI_DC+      |
| #2                 | BI_DD+      |
| #3                 | BI_DD-      |
| #4                 | BI_DA-      |
| #5                 | BI_DB+      |
| #6                 | BI_DA+      |
| #7                 | BI_DC-      |
| #8                 | BI_DB-      |

## Specifications


| ORing Switch Model                            | TES-3162GT-M12-BP1   |
|---|--|
| <b>Physical Ports</b>                         |  |
| 10/100Base-T(X) Ports in M12<br>Auto MDI/MDIX | <b>16 x M12 connector (4-pin D-coding)</b>   |
| 10/100/1000Base-T(X) ports in M12             | <b>2 x M12 connector (8-pin A-coding)</b>  |
| RS-232 Serial Console Port                    | RS-232 in M12 connector (A-coding). Baud rate setting: 9600bps, 8, N, 1  |
| <b>Technology</b>                             |  |
| Ethernet Standards                            | IEEE 802.3 for 10Base-T<br>IEEE 802.3u for 100Base-TX<br>IEEE 802.3ab for 1000Base-T<br>IEEE 802.3x for Flow control<br>IEEE 802.3ad for LACP (Link Aggregation Control Protocol )<br>IEEE 802.1D for STP (Spanning Tree Protocol)<br>IEEE 802.1p for COS (Class of Service)<br>IEEE 802.1Q for VLAN Tagging<br>IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol)<br>IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol)<br>IEEE 802.1x for Authentication<br>IEEE 802.1AB for LLDP (Link Layer Discovery Protocol) |
| MAC Table                                     | 8192 MAC addresses   |
| Priority Queues                               | 4  |

|   |  |
|---|--|
| Processing                              | Store-and-Forward  |
| Switch Properties                       | Switching latency: 7 us<br>Switching bandwidth: 7.2Gbps<br>Max. Number of Available VLANs: 4096<br>IGMP multicast groups: 1024<br>Port rate limiting: User Define  |
| Security Features                       | Enable/disable ports, MAC based port security<br>Port based network access control (802.1x)<br>VLAN (802.1Q ) to segregate and secure network traffic<br>Supports Q-in-Q VLAN for performance & security to expand the VLAN space<br>Radius centralized password management<br>SNMP v1/v2c/v3 encrypted authentication and access security   |
| Software Features                       | STP/RSTP/MSTP (IEEE 802.1D/w/s)<br>Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units<br>TOS/Diffserv supported<br>Quality of Service (802.1p) for real-time traffic<br>VLAN (802.1Q) with VLAN tagging and GVRP supported<br>IGMP Snooping for multicast filtering<br>Port configuration, status, statistics, monitoring, security<br>SNTP for synchronizing of clocks over network<br>Support <b>PTP Client</b> (Precision Time Protocol) clock synchronization<br>DHCP Server / Client support<br>Port Trunk support<br>MVR (Multicast VLAN Registration) support<br>Modbus TCP |
| Network Redundancy                      | O-Ring<br>Open-Ring<br>O-Chain<br>MRP<br>STP<br>RSTP<br>MSTP   |
| Warning / Monitoring System             | Relay output for fault event alarming<br>Syslog server / client to record and view events<br>Include SMTP for event warning notification via email<br>Event selection support  |
| <b>LED Indicators</b>                   |  |
| Power Indicator                         | Green : Power LED x 2  |
| R.M. Indicator                          | Green : Indicate system operated in O-Ring Master mode   |
| O-Ring Indicator                        | Green : Indicate system operated in O-Ring mode  |
| Fault Indicator                         | Amber : Indicate unexpected event occurred   |
| 10/100Base-T(X) M12 Port Indicator      | Green for port Link/Act. Amber for Collision/Duplex indicator.   |
| 10/100/1000Base-T(X) M12 Port Indicator | Green for Link/Act. Amber for 100Mbps indicator  |
| <b>Fault contact</b>                    |  |
| Relay                                   | Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin A-coding)  |
| <b>Power</b>                            |  |
| Redundant Input Power                   | Dual DC inputs. 12~48VDC on 5-pin M23 connector  |
| Power Consumption (Typ.)                | 12.48 Watts  |
| Overload Current Protection             | Present  |
| Reverse Polarity Protection             | Present  |
| <b>Physical Characteristic</b>          |  |
| Enclosure                               | IP-40  |
| Dimension (W x D x H)                   | 260 (W) x 91.3 (D) x216 (H) mm   |
| Weight (g)                              | 2020   |
| <b>Environmental</b>                    |  |
| Storage Temperature                     | -40 to 85°C (-40 to 185°F)   |
| Operating Temperature                   | -40 to 70°C (-40 to 158°F)   |
| Operating Humidity                      | 5% to 95% Non-condensing   |

| Regulatory approvals |  |
|----------------------|--|
| EMI                  | FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)  |
| EMS                  | EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11 |
| Shock                | IEC60068-2-27  |
| Free Fall            | IEC60068-2-32  |
| Vibration            | IEC60068-2-6   |
| Safety               | EN60950-1  |
| <b>Warranty</b>      | 5 years  |

## Ordering Information

**TES-3AABCC-M12-DDD**

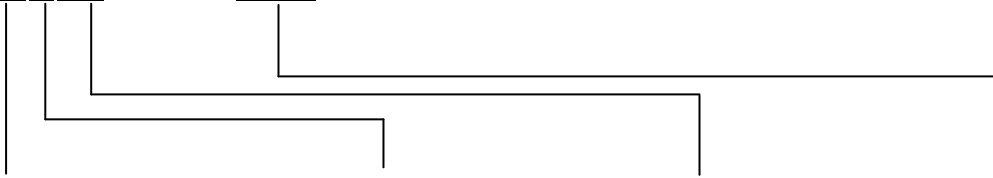

| Code Definition | 10/100Base-T(X) Number | Port | Additional Port Number | Additional Port Type            | Bypass Function                           |
|-----------------|------------------------|------|------------------------|---------------------------------|---|
| Option          | - 16: 16 ports         |      | - 2: 2 ports           | - GT: 10/100/1000Base-T(X) port | - <b>BP1</b> : 1xbypass function included |

| Available Model | Model Name                | Description   |
|-----------------|---------------------------|---|
|                 | <b>TES-3162GT-M12-BP1</b> | EN50155 18-port managed Ethernet switch with 16x10/100Base-T(X) and 2x10/100/1000Base-T(X), M12 connector and 1xbypass included |

## Packing List

- **TES-3162GT-M12-BP1 x 1**
- **ORing Tool CD x 1**
- **Quick Installation Guide x 1**
- **Console cable**

## Optional Accessories

- **Open-Vision M500 : Powerful Network Management Windows utility Suit, 500 IP devices**
- **DR-75-48 : 75 Watts DIN-Rail power supply**
- **DR-120-48 : 120 Watts DIN-Rail power supply**
- **M12C : M12 cable accessories**