

Installation Instructions

LED Panel Recessed Mounted SERIES

Important

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLING. KEEP THIS INSTRUCTIONS FOR FUTURE REFERENCE

Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNING: Risk of fire or electric shock. LED panel Light installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.

WARNING: Risk of fire or electric shock. Suitable for damp locations. Make sure the power is off permiar to install.

WARNING: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.

WARNING: DO NOT install in unstable, loose or breakable surfaces.


WARNING: DO NOT let objects impact or exert force on the surface of the fixture.

Recessed Mounted Installation and Electrical Connection




WARNING
RISK OF FIRE, ELECTRIC SHOCK OR PERSONAL INJURY
Before installation, turn power off.


1 The specific steps of installation (Recessed Mounted)

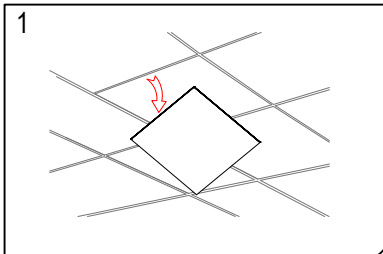


1. Take one piece 60cm * 60cm plasterboard off for installing the new LED panel.

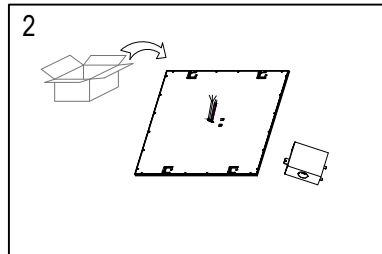


2. Take out the LED panel, cable contact box and some accessory from cartoon.

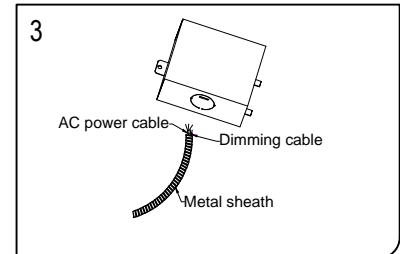


3. Through the cable and metal sheath to the contact box. (There are 3 hole options)

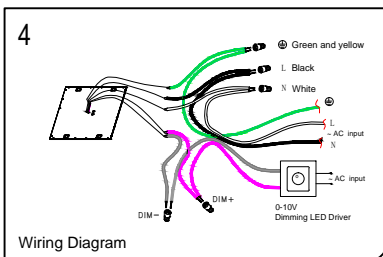


4. Join all cables and contact terminals as wiring diagram, green and yellow cable to earth, black cable to L, white cable to N, gray to DIM-, purple to DIM+.

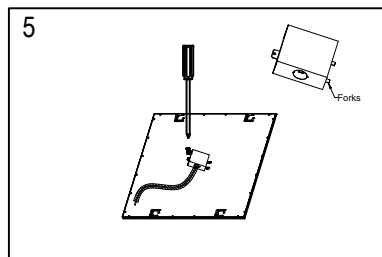


5. Put the contact box forks into the gap of panel back, match two screw holes, and tighten it.

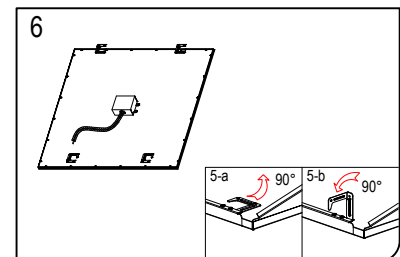


6. Bend 4x safety bracket as picture 5-a and 5-b.

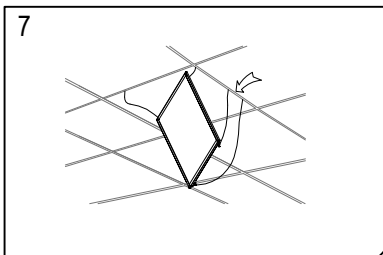

7. Install all safety wires to the ceiling ribs.

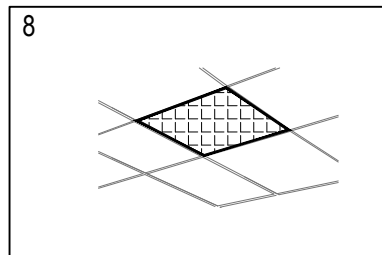

8. Put the LED panel on the ceiling ribs.

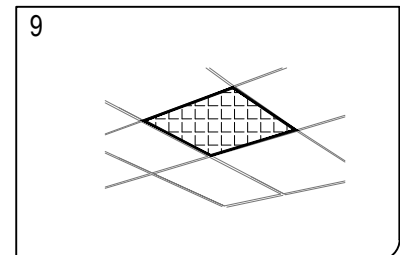

9. Turn on the power to test LED panel is work.